

SIERRA LEONE CIVIL AVIATION REGULATIONS



PART 25 – INSTRUMENT AND EQUIPMENT

DECEMBER 2022

PREAMBLE

WHEREAS, The Director-General shall have power to perform such acts, -including the conduct of investigations, to issue and amend orders, rules, regulations and procedures pursuant to and in accordance with The Civil Aviation Act, 2019.

WHEREAS, the Director- General shall have power to publish all reports, orders, decisions, rules, and regulations issued under The Civil Aviation Act, 2019 in such form and manner as may be best adapted for public information and use;

NOW THEREBY, The Director General under its powers given by Article 17(1) and 17(2) (a) of The Civil Aviation Act, 2019 issue the following regulations which supersedes previous regulations on Instrument and Equipment.

1.SHORT TITLE

This Regulation may be cited as Sierra Leone Civil Aviation Regulation “SLCAR Part 25 – Instrument and Equipment”.

2.EFFECTIVE DATE

This Regulation shall come into force as of the 21st day of December 2022.



Dr Moses Tiffa Baió
Director General

INTRODUCTION

PART 25 of the Sierra Leone Civil Aviation Regulations (SLCARs) presents the International Civil Aviation Organization (ICAO) Standards and Recommended Practices (SARPs) as regulatory requirements for instruments and equipment on aircraft expected to operate in Sierra Leone

The requirements of this part address both air operator certificate (AOC) holder and non-AOC holder operations. The requirements of this part that are applicable to all aircraft, and to both AOC and non-AOC holders, are noted by the key [AAC] preceding the particular requirement. Requirements applicable only to AOC holders are noted by the key [AOC].

In some instances, certain items, such as Machmeters or sea anchors, apply only to aircraft with performance characteristics requiring such items. Some [AAC] requirements apply to passenger-carrying aircraft. In such instances, the requirement addresses the operation of any passenger-carrying aircraft, most particularly turbine-engined aircraft, which may have performance and range capabilities matching the type of aircraft operated by AOC holders. Similarly, some equipment specified for [AOC] aircraft have sections keyed as [AAC].

The key [AAC] applies to all aircraft, whether on domestic or international flights. The key [AOC] applies to AOC holders operating in Sierra Leone, whether on domestic or international flights. Certain sections, such as those addressing minimum navigation performance specifications (MNPS) airspace, may not address airspace contiguous to Sierra Leone, but anticipate that Sierra Leone AOC holders' aircraft may operate through such airspace in the course of commerce. Such requirements are intended to facilitate the integration of Sierra Leone AOC holders into such operations.

This part includes survival equipment requirements that apply to operation in Sierra Leone, as specified in SLCARs Part 6. The Authority is encouraged to review geographic areas within Sierra Leone and designate those areas requiring additional, specific types of survival equipment.

TABLE OF CONTENT

1. GENERAL	5
1.1 APPLICABILITY	5
1.2 DEFINITIONS	5
1.3 ABBREVIATIONS	6
1.4 GENERAL INSTRUMENT AND EQUIPMENT REQUIREMENTS	8
2. FLIGHT INSTRUMENTS	8
2.1 GENERAL REQUIREMENTS	8
2.2 MINIMUM FLIGHT INSTRUMENTS	9
2.3 ALL AEROPLANES OPERATED AS VFR FLIGHTS	9
2.4 INSTRUMENTS REQUIRED FOR INSTRUMENT FLIGHT RULES OPERATIONS	10
2.5 INSTRUMENTS FOR OPERATION AT NIGHT	12
2.6 STANDBY ATTITUDE INDICATOR	12
2.7 INSTRUMENTS AND EQUIPMENT FOR CATEGORY II OPERATIONS	13
2.8 INSTRUMENTS AND EQUIPMENT FOR CATEGORY III OPERATIONS	14
2.9 AEROPLANES AND HELICOPTERS EQUIPPED WITH AUTOMATIC LANDING SYSTEMS, HEAD-UP DISPLAYS OR EQUIVALENT DISPLAYS, ENHANCED VISION SYSTEMS, SYNTHETIC VISION SYSTEMS, AND/OR COMBINED VISION SYSTEMS	16
2.10 ELECTRONIC FLIGHT BAGS	16
3. COMMUNICATION EQUIPMENT	17
3.1 RADIO EQUIPMENT	17
3.2 FLIGHT CREW AND CREW MEMBER INTERPHONE SYSTEM FOR AEROPLANES	18
3.3 PUBLIC ADDRESS SYSTEM	19
3.4 MICROPHONES	19
4. NAVIGATION EQUIPMENT	20
4.1 GENERAL	20
4.2 SURVEILLANCE EQUIPMENT	21
4.3 MINIMUM NAVIGATION PERFORMANCE SPECIFICATIONS	21
4.4 REDUCED VERTICAL SEPARATION MINIMUM	22
4.5 ELECTRONIC NAVIGATION DATA MANAGEMENT	23
4.6 PRESSURE-ALTITUDE REPORTING TRANSPONDER	23
5. AIRCRAFT LIGHTS AND INSTRUMENT ILLUMINATION	23
5.1 ENGINE INSTRUMENTS	23
5.1 REQUIRED AIRCRAFT LIGHTS AND INSTRUMENT ILLUMINATION	24
5.2 REQUIRED AIRCRAFT LIGHTS AND INSTRUMENT ILLUMINATION FOR COMMERCIAL AIR TRANSPORT OPERATIONS	24
6. RESERVED	25
7. WARNING INSTRUMENTS AND SYSTEMS	25
7.1 MACH NUMBER INDICATOR	25
7.2 LOSS OF PRESSURISATION INDICATOR	25
7.3 LANDING GEAR INDICATOR POSITION AND AURAL WARNING DEVICE	25
7.4 ALTITUDE ALERTING SYSTEM	25
7.5 GROUND PROXIMITY WARNING SYSTEM	26
7.6 WEATHER RADAR	26

7.7	AIRBORNE COLLISION AVOIDANCE SYSTEM.....	27
7.8	FORWARD LOOKING WIND SHEAR WARNING SYSTEM – TURBOJET AEROPLANES.....	27
7.9	LOCATION OF AN AEROPLANE IN DISTRESS	27
7.10	TURBINE AEROPLANE - RUNWAY OVERRUN AWARENESS AND ALERTING SYSTEM (ROAAS)	28
8	FLIGHT RECORDERS	28
8.1	FLIGHT RECORDERS.....	28
8.2	FLIGHT DATA RECORDERS AND AIRCRAFT DATA RECORDING SYSTEMS.....	31
8.3	COCKPIT VOICE RECORDERS AND COCKPIT AUDIO RECORDING SYSTEMS	34
8.4	DATA LINK RECORDERS AND DATA LINK RECORDING SYSTEMS	36
8.5	AIRBORNE IMAGE RECORDER AND AIRBORNE IMAGE RECORDING SYSTEM.....	37
8.6	FLIGHT CREW-MACHINE INTERFACE RECORDING	37
9	EMERGENCY, RESCUE, AND SURVIVAL EQUIPMENT	38
9.1	EMERGENCY EQUIPMENT – ALL AIRCRAFT.....	38
9.2	EMERGENCY EXIT EQUIPMENT – PASSENGERS.....	38
9.3	VISUAL SIGNALLING DEVICES	45
9.4	SURVIVAL KITS.....	45
9.5	EMERGENCY LOCATOR TRANSMITTER	45
9.6	PORTABLE FIRE EXTINGUISHERS	46
9.7	LAVATORY FIRE EXTINGUISHER.....	48
9.8	LAVATORY SMOKE DETECTOR	48
9.9	CRASH AXE	49
9.10	MARKING OF BREAK-IN POINTS.....	49
9.11	FIRST AID KITS AND UNIVERSAL PRECAUTION KITS	49
9.12	EMERGENCY MEDICAL KIT – AEROPLANES.....	50
9.13	OXYGEN STORAGE AND DISPENSING APPARATUS	50
9.14	PROTECTIVE BREATHING EQUIPMENT	51
9.15	FIRST AID OXYGEN DISPENSING UNITS.....	52
9.16	MEGAPHONES	52
9.17	INDIVIDUAL FLOTATION DEVICES	52
9.18	LIFE RAFTS	53
9.19	FLOTATION DEVICE FOR HELICOPTER DITCHING	53
10	MISCELLANEOUS SYSTEMS AND EQUIPMENT.....	54
10.1	SEATS, SAFETY BELTS, AND SHOULDER HARNESSSES	54
10.2	PASSENGER AND PILOT COMPARTMENT DOORS – AEROPLANES	54
10.3	PASSENGER INFORMATION SIGNS	55
10.4	MATERIALS FOR CABIN INTERIORS.....	55
10.5	MATERIALS FOR CARGO AND BAGGAGE COMPARTMENTS.....	56
10.6	POWER SUPPLY, DISTRIBUTION, AND INDICATION SYSTEM.....	56
10.7	PROTECTIVE CIRCUIT FUSES	56
10.8	ICING PROTECTION EQUIPMENT	56
10.9	PITOT HEAT AND INDICATION SYSTEMS.....	56
10.10	STATIC PRESSURE SYSTEM	57
10.11	WINDSHIELD WIPERS	57
10.12	CHART HOLDER	57
10.13	COSMIC RADIATION DETECTION EQUIPMENT	57

10.14	MARITIME SOUND SIGNALLING DEVICE.....	57
10.15	ANCHORS.....	57
10.16	ALL AEROPLANES ON FLIGHTS OVER WATER	58
10.17	ALL AEROPLANES ON FLIGHTS OVER DESIGNATED LAND AREAS.....	59
10.18	ALL AEROPLANES ON HIGH ALTITUDE FLIGHTS	59
10.19	ALL AEROPLANES OPERATED ABOVE 15 000 M (49 000 FT) — RADIATION INDICATOR	60

IMPLEMENTING STANDARDS61

IS 2.1.7	CATEGORY II: INSTRUMENTS AND EQUIPMENT APPROVAL AND MAINTENANCE REQUIREMENTS.....	61
IS 4.1.4	REDUCED VERTICAL SEPARATION MINIMUM – ALTIMETRY SYSTEM PERFORMANCE REQUIREMENTS FOR OPERATIONS IN RVSM AIRSPACE	64
IS 7.9	LOCATION OF AN AEROPLANE IN DISTRESS	65
IS 8.1.2	CONSTRUCTION AND INSTALLATION.....	66
IS 8.1.4	CONTINUED SERVICEABILITY AND INSPECTION OF FLIGHT RECORDER SYSTEMS	66
IS 8.2.1(A)	FLIGHT DATA RECORDERS: TYPES AND PARAMETERS – AEROPLANE	67
IS 8.2.1(B)	FLIGHT DATA RECORDERS AND AIRCRAFT DATA RECORDING SYSTEMS: TYPES AND PARAMETERS – HELICOPTERS	77
IS 8.2.2	AIRCRAFT EQUIPAGE FOR OPERATION – AIRCRAFT DATA RECORDING SYSTEM.....	83
IS 8.4.1	DATA LINK RECORDER APPLICABILITY.....	88
IS 9.1.2	EMERGENCY EXIT EQUIPMENT – PASSENGERS	92
IS 9.1.11	FIRST AID KITS AND UNIVERSAL PRECAUTION KITS	95
IS 9.1.12	EMERGENCY MEDICAL KIT – AEROPLANES	96
IS 9.1.13	OXYGEN STORAGE AND DISPENSING APPARATUS	97
IS 10.1.13	COSMIC RADIATION DETECTION EQUIPMENT.....	102

1. GENERAL

(a) In transposing the ICAO Annexes below, the following amendments have been taking into consideration:

- (i) Annex 6 Volume I – Amendment 1-48
- (ii) Annex 6 Volume II – Amendment 1-40
- (iii) Annex 6 Volume III – Amendment 1-24

(b) The requirements of this Part are written such that approvals are granted to AOC holders through operations specifications, and approvals are granted to non-AOC holders, such as general aviation operators, through letters of authorisation.

1.1 Applicability

(a) This Part prescribes the minimum instrument and equipment requirements for all aircraft in all operations.

(b) The requirements of this Part use the following key designators:

- (1) AAC. All aircraft – non-AOC holders and AOC holders appropriate to the subject of the regulations, e.g., an AAC regulation may only refer to seaplanes but will include seaplanes operated by non-AOC holders and AOC seaplanes.
- (2) AOC. AOC holders are operators engaged in commercial air transport. Where AOC requirements are more detailed, the AOC requirements will be followed.

1.2 Definitions

Definitions are contained in Part 1 of these regulations.

1.3 Abbreviations

The following abbreviations are used in this Part:

AAC – all aircraft

ACAS – airborne collision avoidance system

AED -- automated external defibrillator

ADF – automatic direction finder

ADFR – automatic deployable flight recorder

ADRS – aircraft data recording system

AFM – Aircraft Flight Manual

AIR – airborne image recorder

AIRS – airborne image recording system

AOC – air operator certificate

ASE – altimetry system error

ATS – air traffic service(s)

CARS – cockpit audio recording system

CAT I – Category I

CAT II – Category II

CAT III – Category III

CG – centre of gravity

CVR – cockpit voice recorder

CVS – combined vision system

DH – decision height

DLC – data link communications

DLR – data-link recorder

DLRS – data-link recording system

DME – distance measuring equipment

EASA – European Union Aviation Safety Agency

ECAM – electronic centralised aircraft monitor

EFB – electronic flight bag

EFIS – electronic flight instrument systems

EICAS – engine indication and crew alerting system

ELT – emergency locator transmitter

EUROCAE – European Organisation for Civil Aviation Equipment

EVS – enhanced vision system

FANS –

FDR – flight data recorder

FL – flight level

GPWS – ground proximity warning system

HUD – head-up display

ICAO – International Civil Aviation Organization

IFR – instrument flight rules

ILS – instrument landing system

IMC – instrument meteorological conditions

LRNS – long-range navigation system

MACH – Mach number indicator

MEL – minimum equipment list

MHz – megahertz

MLS – microwave landing system

MNPS – minimum navigation performance specifications

OM – Operations Manual

PBC – performance-based communication

PBCS – performance-based communication and surveillance

PBE – protective breathing equipment

PBN – performance-based navigation

PBS – performance-based surveillance

PIC – pilot-in-command

RCP – required communication performance

RNAV – area navigation

RSP – required surveillance programme

RTCA – Radio Technical Commission for Aeronautics

RVR – runway visual range

RVSM – reduced vertical separation minimum

SARPs – Standards and Recommended Practices

STPD – Standard Temperature Pressure Dry

SVS – synthetic vision system

TAWS – terrain awareness warning system

TC – type certificate

TVE – total vertical error

VFR – visual flight rules

VOR – VHF omnidirectional radio range

1.4 General Instrument and Equipment Requirements

- (a) [AAC] In addition to the minimum equipment necessary for the issuance of a certificate of airworthiness, the instruments, equipment, and flight documents prescribed in this Part shall be installed or carried, as appropriate, in aircraft according to the aircraft used and to the circumstances under which the flight is to be conducted.
- (b) [AAC] All required instruments and equipment shall be approved and installed in accordance with applicable airworthiness requirements.
- (c) [AAC] Prior to operation in Sierra Leone of any aircraft that is not registered in Sierra Leone and that uses an airworthiness inspection programme approved or accepted by the State of Registry, the owner or operator shall ensure that instruments and equipment required by Sierra Leone but not installed in the aircraft are properly installed and inspected in accordance with the requirements of the State of Registry.
- (d) [AOC] No person shall commence a flight in commercial air transport operations unless the required equipment:
 - (1) Meets the minimum performance standard, all operational and airworthiness requirements, and the relevant provisions of SLCARs Part 10D;
 - (2) Is installed such that the failure of any single unit required for either communication or navigation purposes, or both, will not result in the inability to communicate and/or navigate safely on the route being flown; and
 - (3) Is in operable condition for the type of operation being conducted, except as provided in the MEL.
- (e) [AAC] If equipment is to be used by one flight crew member at his or her station during flight, it shall be installed so as to be readily operable from that flight crew member's station.
- (f) [AAC] When a single item of equipment is required to be operated by more than one flight crew member, it shall be installed so that the equipment is readily operable from any station at which the equipment is required to be operated.

2. FLIGHT INSTRUMENTS

2.1 General Requirements

- (a) [AAC] All aircraft shall be equipped with flight instruments that enable the flight crew to:
 - (1) Control the flight path of the aircraft;
 - (2) Carry out any required procedural manoeuvres; and
 - (3) Observe the operating limitations of the aircraft in the expected operating conditions.
- (b) [AAC] When a means is provided for transferring an instrument from its primary operating system to an alternative system, the means shall include a positive positioning control and shall be marked to indicate clearly which system is being used.
- (c) [AAC] Those instruments that are used by any one pilot shall be so arranged as to permit the pilot to see the indications readily from his or her station, with the minimum practicable deviation from the position and line of vision that he or she normally assumes when looking forward along the flight path.

2.2 Minimum Flight Instruments

- (a) [AAC] No person may operate any powered aircraft unless the aircraft is equipped with the following flight instruments:
 - (1) An airspeed indicating system calibrated in knots, miles per hour, or kilometers per hour;
 - (2) A sensitive pressure altimeter calibrated in feet with a sub-scale setting calibrated in hectopascals/millibars, adjustable for any barometric pressure likely to be set during flight;
 - (3) An accurate timepiece indicating time in hours, minutes, and seconds;
 - (i) For non-AOC operations, either equipage or carriage is acceptable;
 - (4) A magnetic compass; and
 - (5) Any other equipment as prescribed by the Authority.
- (b) [AAC] No person may operate an aircraft in VFR flight as a controlled flight unless the aircraft is equipped with the instruments required by 2.1.4 of this Part.

2.3 All Aeroplanes Operated as VFR Flights

2.3.1 All aeroplanes when operated as VFR flights shall be equipped with:

- (a) a magnetic compass;
- (b) an accurate timepiece indicating the time in hours, minutes and seconds;
- (c) a sensitive pressure altimeter;
- (d) an airspeed indicator; and
- (e) such additional instruments or equipment as may be prescribed by the Authority.

2.3.2 Instruments for Operations Requiring Two Pilots in Day Visual Flight Rules

- (a) [AOC] Whenever two pilots are required, each pilot's station shall have separate flight instruments as follows:
 - (1) An airspeed indicating system calibrated in knots, miles per hour, or kilometers per hour;
 - (2) A sensitive pressure altimeter calibrated in feet with a sub-scale setting calibrated in hectopascals/millibars, adjustable for any barometric pressure likely to be set during flight;
 - (3) A vertical speed indicator;
 - (4) A turn and slip indicator, or a turn coordinator incorporating a slip indicator;

- (5) An attitude indicator;
- (6) A stabilised direction indicator; and
- (7) Any other equipment as required by the Authority.

2.4 Instruments Required for Instrument Flight Rules Operations

- (a) [AAC] All aircraft when operated in IFR, or when the aircraft cannot be maintained in a desired attitude without reference to one or more flight instruments, shall be equipped with:
 - (1) A means of measuring and displaying:
 - (i) Magnetic heading (standby compass);
 - (ii) The time in hours, minutes, and seconds;
 - (A) For non-AOC operations, either equiptage or carriage is acceptable;
 - (iii) Barometric altitude;
 - (iv) Indicated airspeed, with a means of preventing malfunctioning due to either condensation or icing;
 - (v) Turn and slip;
 - (vi) Aircraft attitude;
 - (vii) Stabilised aircraft heading;
 - (viii) Whether the supply of power to the gyroscopic instruments is adequate;
 - (ix) Outside air temperature; and
 - (x) Rate-of-climb and descent.
 - (2) In addition, aeroplanes with a maximum certificated take-off mass of over 5 700 kg or equipped with one or more turbojet engines shall be equipped with:
 - (i) An emergency power supply for electrically operated attitude indicating instruments:
 - (A) Independent of the main electrical generating system, for the purpose of operating and illuminating, for a minimum period of 30 minutes, an attitude indicating instrument (artificial horizon), clearly visible to the PIC; and
 - (B) Automatically operative after the total failure of the main electrical generating system and clear indication given on the instrument panel that the attitude indicator(s) is being operated by emergency power;
 - (ii) For aeroplanes with advanced flight deck automation systems (glass flight decks), system redundancy that provides the flight crew with attitude, heading, airspeed, and altitude indications in case of failure of the primary system or display; and
 - (iii) Such additional instruments or equipment as may be prescribed by the Authority.
- (b) [AOC] All aircraft when operated in IFR, or when the aircraft cannot be maintained in a desired attitude without reference to one or more flight instruments, shall be equipped with:
 - (1) For all aeroplanes:
 - (i) A magnetic compass;
 - (ii) An accurate timepiece indicating the time in hours, minutes, and seconds;
 - (iii) Two sensitive pressure altimeters with counter drum-pointer or equivalent presentation;
 - (iv) An airspeed indicating system with a means of preventing malfunctioning due to either condensation or icing;
 - (v) A turn and slip indicator aeroplanes or a slip indicator for helicopters;

- (vi) Attitude indicator (artificial horizon);
 - (vii) A heading indicator (directional gyroscope);
 - (viii) A means of indicating whether the supply of power to the gyroscopic instruments is adequate;
 - (ix) A means of indicating in the flight crew compartment the outside air temperature; and
 - (x) A rate-of-climb and descent indicator; and
- (2) In addition, aeroplanes with a maximum certificated take-off mass exceeding 5 700 kg or equipped with one or more turbojet engines shall be equipped with:
- (i) An emergency power supply for electrically operated attitude indicating instruments;
 - (ii) Independent of the main electrical generating system for the purpose of operating and illuminating, for a minimum period of 30 minutes, an attitude indicating instrument (artificial horizon), clearly visible to the PIC, and
 - (iii) Automatically operative after the total failure of the main electrical generating system and clear indication given on the instrument panel that the attitude indicator(s) is being operated by emergency power; and
 - (iv) Such additional instruments or equipment as may be prescribed by the Authority.
- (c) [AOC] No person may operate an aeroplane under IFR, or under VFR over routes that cannot be navigated by reference to visual landmarks, unless the aeroplane is equipped with navigation equipment in accordance with the requirements of ATS in the area(s) of operation.
- (1) [AOC] No person may conduct single-pilot IFR operations unless the aeroplane is equipped with an autopilot with at least altitude hold and heading mode.
- (2) [AAC] No person may operate an aeroplane under IFR unless the aeroplane is equipped with an audio selector panel accessible to each required flight crew member.
- (3) [AOC] No person may conduct single-pilot IFR or night operations in commercial air transport operations unless the aeroplane is equipped with a headset with boom microphone or equivalent and a transmit button on the control wheel.
- (d) [AAC] All helicopters, unless otherwise indicated, when operated in IFR or when the helicopter cannot be maintained in a desired attitude without reference to one or more flight instruments, shall be equipped with:
- (1) For all helicopters:
 - (i) A magnetic compass;
 - (ii) The time in hours, minutes, and seconds;
 - (A) For non-AOC operations, either equipage or carriage is acceptable;
 - (iii) A pressure altimeter:
 - (A) [AAC] A sensitive pressure altimeter;
 - (B) [AOC] Two sensitive pressure altimeters;
 - (iv) An airspeed indicating system with a means of preventing malfunctioning due to either condensation or icing;
 - (v) A slip indicator;
 - (vi) Attitude indicator (artificial horizon) for each required pilot and one additional attitude indicator;
 - (vii) A heading indicator (directional gyroscope);

- (viii) A means of indicating whether the supply of power to the gyroscopic instruments is adequate;
 - (ix) A means of indicating on the flight deck the outside air temperature;
 - (x) A rate-of-climb and descent indicator;
 - (xi) A stabilisation system, unless it has been demonstrated to the satisfaction of the Authority that the helicopter possesses, by nature of its design, adequate stability without such a system;
- (2) [AOC] An emergency power supply for electrically operated attitude indicating instruments:
- (i) Independent of the main electrical generating system for the purpose of operating and illuminating, for a minimum period of 30 minutes, an attitude indicating instrument (artificial horizon), clearly visible to the PIC; and
 - (ii) Automatically operative after the total failure of the main electrical generating system and clear indication given on the instrument panel that the attitude indicator(s) is being operated by emergency power; and
- (3) Such additional instruments or equipment as may be prescribed by the Authority.

2.5 Instruments for Operation at Night

- (a) [AAC] No person may operate an aeroplane at night unless the aeroplane is equipped with the following:
- (1) The instruments specified in 2.1.4 of this Part appropriate to the aircraft and operation; and
 - (2) The lights specified in 5 of this Part.
- (b) [AOC] No person may operate an aeroplane at night unless the aeroplane is equipped with the following:
- (1) The instruments specified in 2.1.4 of this Part appropriate to the aircraft and operation; and
 - (2) The lights specified in 5 of this Part.
- (c) [AAC] No person may operate a helicopter at night unless the helicopter is equipped with the following:
- (1) The instruments specified in 2.1.4 of this Part appropriate to the aircraft and operation;
 - (2) An attitude indicator (artificial horizon) for each required pilot;
 - (3) A slip indicator;
 - (4) A heading indicator (directional gyroscope);
 - (5) A rate of climb and descent indicator;
 - (6) The lights specified in 5 of this Part; and
 - (7) Such additional instruments or equipment as may be prescribed by the Authority.

2.6 Standby Attitude Indicator

- (a) [AAC] No person may operate an aeroplane with a maximum certificated take-off mass of over 5 700 kg or a performance Class 1 or 2 helicopter unless that aeroplane or helicopter is equipped with a single standby attitude indicator (artificial horizon) that:

- (1) Operates independently of any other attitude indicating system;
 - (2) Is powered continuously during normal operation; and
 - (3) After a total failure of the normal electrical generating system is automatically powered for a minimum of 30 minutes from a source independent of the normal electrical generating system.
- (b) [AAC] When the standby attitude indicator is being operated by emergency power, it shall be clearly operating and illuminated to the flight crew.
 - (c) [AAC] Where the standby attitude indicator has its own dedicated power supply there shall be an associated indication, either on the instrument or on the instrument panel, when this supply is in use.
 - (d) [AAC] If the standby attitude instrument system is installed and usable through flight attitudes of 360 degrees of pitch and roll, the turn and slip indicators may be replaced by slip indicators.

2.7 Instruments and Equipment for Category II Operations

- (a) The instruments and equipment listed in this subsection shall be installed, approved, and maintained in accordance with IS 2.1.7 for each aircraft operated in a CAT II operation:
 - (1) Group I is comprised of the following equipment, which shall be inspected within 3 calendar months of the previous inspection and shall also have a bench inspection within 12 months of the previous bench inspection using procedures contained in the approved maintenance programme:
 - (i) Two localiser and glide slope receiving systems;
 - (ii) A communications system that does not affect the operation of at least one of the ILS systems;
 - (iii) A marker beacon receiver that provides distinctive aural and visual indications of the outer and the middle markers;
 - (iv) Two gyroscopic pitch and bank indicating systems;
 - (v) Two gyroscopic direction indicating systems;
 - (vi) Two airspeed indicators;
 - (vii) Two sensitive altimeters adjustable for barometric pressure, having markings at 20-foot intervals and each having a placarded correction for altimeter scale error and for the wheel height of the aircraft;
 - (viii) One self-monitoring radio altimeter with dual display;
 - (ix) Two vertical speed indicators;
 - (x) A flight control guidance system that consists of either an automatic approach coupler or a flight director system; and
 - (xi) For CAT II operations with DHs below 150 feet, a radio altimeter is required.
 - (2) Group II is comprised of the following equipment, which shall be inspected within 12 months of the previous inspection using procedures contained in the approved maintenance programme and which, with the exception of the static system, does not require special maintenance procedures other than those necessary to retain the original approval condition:
 - (i) Warning systems for immediate detection by the pilot of system faults in the items listed in paragraphs 2.1.7(a)(1)(i), (iv), (v), and (x) of this subsection;

- (ii) Dual controls;
- (iii) An externally vented static pressure system with an alternate static pressure source;
- (iv) A windshield wiper or equivalent means of providing adequate flight deck visibility for a safe visual transition by either pilot to touchdown and rollout; and
- (v) A heat source for each airspeed system pitot tube installed or an equivalent means of preventing malfunctioning due to icing of the pitot system.

2.8 Instruments and Equipment for Category III Operations

- (a) The following instruments and equipment shall be installed, approved, and maintained in each aircraft operated in a CAT III operation, in accordance with acceptable international criteria and the AFM:
 - (1) AIRBORNE SYSTEMS FOR CAT IIIA MINIMA NOT LESS THAN RVR 200 M (600 FT). The following equipment, in addition to the instruments and navigation equipment required by this Part for IFR flight and CAT II operations, is the minimum aircraft equipment required for CAT IIIA operations:
 - (i) A redundant flight control or guidance system demonstrated in accordance with acceptable international criteria. Acceptable flight guidance or control systems include the following:
 - (A) A Fail Operational or Fail Passive automatic landing system at least to touchdown;
 - (B) A Fail Operational or Fail Passive manual flight guidance system providing suitable head-up or head-down command guidance, and suitable monitoring capability at least to touchdown;
 - (C) A hybrid system, using automatic landing capability as the primary means of landing at least to touchdown; or
 - (D) Another system that can provide an equivalent level of performance and safety.
 - (ii) An automatic throttle or automatic thrust control system that meets approved criteria as specified in the AFM. However, for operations with a 15 m (50 ft) DH, or for other operations that have been specifically evaluated, such as for engine inoperative landing capability, automatic throttles may not be required if it has been demonstrated that operations can be safely conducted, with an acceptable workload, without their use.
 - (iii) At least two independent navigation receivers/sensors providing lateral and vertical position or displacement information, typically with the first pilot's station receiving the information from one and the second pilot's station receiving the information from the other. The navigation receivers/sensors shall meet the criteria specified for CAT IIIA operations.
 - (iv) At least two approved radio altimeter systems that meet the performance criteria as specified in the AFM, typically with the first pilot's station receiving information from one and the second pilot's station receiving information from the other.
 - (v) Failure detection, annunciation, and warning capability, as determined acceptable by criteria in the AFM.
 - (vi) Missed approach guidance provided by one or more of the following means:

- (A) Attitude displays that include calibrated pitch attitude markings, or a pre-established computed pitch command display;
 - (B) An approved flight path angle display; or
 - (C) An automatic or flight guidance go-around capability.
 - (i) Suitable forward and side flight deck visibility for each pilot, as specified in the AFM.
 - (ii) Suitable windshield rain removal, ice protection, or defog capability, as specified in the AFM.
- (2) AIRBORNE SYSTEMS FOR CAT IIIB MINIMA LESS THAN RVR 200 M (600 FT) BUT NOT LESS THAN RVR 125 M (400 FT). The following equipment, in addition to the instruments and navigation equipment required by this Part for IFR flight and CAT II and CAT IIIA operations, is the minimum aircraft equipment required for CAT IIIB operations:
- (i) A redundant flight control or guidance system demonstrated in accordance with acceptable international criteria. Acceptable flight guidance or control systems include the following:
 - (A) A Fail Operational landing system with a Fail Operational or Fail Passive automatic rollout system;
 - (B) A Fail Passive landing system, limited to touchdown zone RVR not less than RVR 200 m (600 ft), with Fail Passive rollout provided automatically or by a flight guidance system providing suitable head-up or head-down guidance, and suitable monitoring capability;
 - (C) A Fail Operational hybrid automatic landing and rollout system with compatible manual flight guidance system, using automatic landing capability as the primary means of landing; or
 - (D) Another system that can provide an equivalent level of performance and safety.
 - (ii) An automatic throttle or automatic thrust control system that meets the appropriate criteria, as specified in the AFM. However, for operations with a 15 m (50 ft) DH, automatic throttles may not be required if it has been demonstrated that operations can safely be conducted, with an acceptable workload, without their use.
 - (iii) At least two independent navigation receivers/sensors providing lateral and vertical position or displacement information, typically with the first pilot's station receiving information from one and the second pilot's station receiving information from the other. The navigation receivers/sensors shall meet the criteria specified in the AFM.
 - (iv) At least two approved radio altimeter systems that meet the performance criteria outlined in the AFM, typically with the first pilot's station receiving information from one and the second pilot's station receiving information from the other.
 - (v) Failure detection, annunciation, and warning capability, as determined acceptable by the criteria in the AFM.
 - (vi) Missed approach guidance provided by one or more of the following means:
 - (A) Attitude displays that include calibrated pitch attitude markings, or a pre-established computed pitch command display;

- (B) An approved flight path angle display; or
- (C) An automatic or flight guidance go-around capability.
- (vii) Suitable forward and side flight deck visibility for each pilot, as specified in the AFM.
- (viii) Suitable windshield rain removal, ice protection, or defog capability, as specified in the AFM.
- (3) AIRBORNE SYSTEMS FOR CAT IIIC MINIMA LESS THAN RVR 75 M (300 FT). The following equipment, in addition to the instruments and navigation equipment required by this Part for IFR flight and CAT II, CAT IIIA, and CAT IIIB operations, is the minimum aircraft equipment required for CAT IIIC operations:
 - (i) A Fail Operational automatic flight control system, or a manual flight guidance system designed to meet Fail Operational system criteria, or a hybrid system in which both the Fail Passive automatic system and the monitored manual flight guidance components provide approach and flare guidance to touchdown, and in combination provide full Fail Operational capability; and
 - (ii) A Fail Operational automatic, manual, or hybrid rollout control system.

2.9 Aeroplanes and Helicopters Equipped with Automatic Landing Systems, Head-Up Displays or Equivalent Displays, Enhanced Vision Systems, Synthetic Vision Systems, and/or Combined Vision Systems

- (a) No person shall operate an aircraft equipped with automatic landing systems, a HUD or equivalent display, EVS, SVS, CVS, or any combination of those systems into a hybrid system, unless the aircraft is approved by the Authority and is in accordance with the criteria for the safe operation of an aircraft established by the State of the Operator.

2.10 Electronic Flight Bags

- (a) No person shall operate an EFB on board an aircraft unless the EFB is issued a specific approval by the State of the Operator in accordance with the appropriate airworthiness requirements and the criteria for the safe operation of an aircraft, which:
 - (1) Assess the EFB equipment and its associated installation hardware, including interaction with aircraft systems if applicable, to meet the appropriate airworthiness certification requirements;
 - (2) Assess the risks associated with the operations supported by the EFB function(s);
 - (3) Establish requirements for redundancy of the information (if appropriate) contained in and displayed by the EFB function(s);
 - (4) Establish and document procedures for the management of the EFB function(s), including any databases it may use; and
 - (5) Establish and document the procedures for the use of, and the training requirements for, the EFB function(s).
- (b) No person shall operate an EFB on board an aircraft unless the PIC and/or operator/owner has ensured that the EFB does not affect the performance of the aircraft systems or equipment or the ability to operate the aircraft and has:

- (1) Assessed the safety risk(s) associated with each EFB function;
- (2) Established and documented the procedures for the use of, and the training requirements for, the device and each EFB function; and
- (3) Ensured that, in the event of an EFB failure, sufficient information is readily available to the flight crew for the flight to be conducted safely.

3. COMMUNICATION EQUIPMENT

3.1 Radio Equipment

- (a) [AAC] No person may operate an aircraft unless the aircraft is equipped with radio communication equipment required for the type of operation being conducted.
- (b) [AAC] All aircraft operated in VFR as a controlled flight; in IFR; at night; as an extended flight over water; or over land designated by the Authority as especially difficult for search and rescue shall be equipped with radio communication equipment:
 - (1) Capable of conducting two-way communication at any time with ATS or aeronautical stations;
 - (2) Capable of conducting communications on those frequencies prescribed by the Authority;
 - (3) Capable of receiving meteorological information at any time during the flight;
 - (4) Capable of conducting communications on the aeronautical emergency frequency 121.5 MHz;
 - (5) Approved and installed in accordance with applicable requirements, including the minimum performance requirements;
 - (6) Installed such that the failure of any single unit required for communication will not result in the failure of another unit required for communication purposes; and
 - (7) Meeting any other requirements as prescribed by the Authority.
- (c) [AAC] For operations where communication equipment is required to meet an RCP specification for PBC, an aeroplane shall, in addition to the requirements in paragraphs 3.1.1(a) and (b) of this subsection:
 - (1) Be provided with communication equipment that will enable it to operate in accordance with the prescribed RCP specification;
 - (2) Have information relevant to the aircraft RCP specification capabilities listed in the AFM or other aircraft documentation approved by the Authority; and
 - (3) Have information relevant to the aircraft RCP specification capabilities included in the MEL.
- (d) [AAC] No person shall operate an aircraft without meeting the established criteria where an RCP specification for PBC has been prescribed by the Authority.
- (e) [AAC] For operations where an RCP specification for PBC has been prescribed, the operator shall establish and document:
 - (1) Normal and abnormal procedures, including contingency procedures;
 - (2) Flight crew qualification and proficiency requirements, in accordance with appropriate RCP specifications;
 - (3) A training programme for relevant personnel consistent with the intended operations; and

- (4) Appropriate maintenance procedures to ensure continuing airworthiness, in accordance with appropriate RCP specifications.
- (f) [AAC] The operator shall ensure to provide the Authority in respect of those aircraft mentioned in paragraph 3.1.1(c) of this subsection, the following:
 - (1) Reports of observed communication performance issued by monitoring programmes established in accordance with SLCARs Part 11: 3.3.5.2; and
 - (2) Corrective action for individual aircraft, aircraft types, or operators identified in such reports as not complying with the RCP specification.
- (g) [AOC] No person may operate an aircraft in commercial air transport operations, or as otherwise specified by the Authority, unless the aircraft is equipped with two independent radio communication systems, appropriate to the route and airspace used.
- (h) [AAC] When more than one communication equipment unit is required, each unit shall be independent of the other unit(s) to the extent that a failure in any one unit will not result in the failure of any other.

3.2 Flight Crew and Crew Member Interphone System for Aeroplanes

- (a) [AOC] No person may operate an aeroplane in commercial air transport operations on which a flight crew of more than one is required unless the aeroplane is equipped with a flight crew interphone system, including headsets and microphones, not of a handheld type, for use by all members of the flight crew.
- (b) [AOC] No person may operate an aeroplane in commercial air transport operations with a maximum certificated take-off mass of over 15 000 kg, or having an approved passenger seating capacity of 19 or more, or having a flight crew compartment door, unless the aeroplane is equipped with a crew member interphone system that:
 - (1) Operates independently of the public address system except for handsets, headsets, microphones, selector switches, and signalling devices;
 - (2) Provides a means of two-way communication between the flight crew compartment and each:
 - (i) Passenger compartment;
 - (ii) Galley located on other than a main passenger deck level; and
 - (iii) Remote crew compartment that is not on the passenger deck and is not easily accessible from a passenger compartment;
 - (3) Is readily accessible for use:
 - (i) From each of the required flight crew stations in the flight crew compartment; and
 - (ii) At required cabin crew member stations close to each separate or pair of floor-level emergency exits;
 - (4) Has an alerting system incorporating aural or visual signals for use by flight crew members to alert the cabin crew, and for use by cabin crew members to alert the flight crew in the event of suspicious activity or security breaches in the cabin;
 - (5) Has a means for the recipient of a call to determine whether it is a normal call or an emergency call; and

- (6) When the aeroplane is on the ground, provides a means of two-way communication between ground personnel and at least two flight crew members.

3.3 Public Address System

- (a) [AOC] No AOC holder may operate a passenger-carrying aeroplane with a maximum approved passenger seating configuration of more than 19 unless a public address system is installed that:
 - (1) Operates independently of the interphone systems except for handsets, headsets, microphones, selector switches, and signalling devices;
 - (2) Is readily accessible for immediate use from each required flight crew member station;
 - (3) For each required floor-level passenger emergency exit that has an adjacent cabin crew seat, has a microphone that is readily accessible to the seated cabin crew member, except that one microphone may serve more than one exit, provided the proximity of the exits allows unassisted verbal communication between seated cabin crew members;
 - (4) Is capable of operation within 10 seconds by a cabin crew member at each of those stations in the compartment from which its use is accessible; and
 - (5) Is audible and intelligible at all passenger seats, lavatories, and cabin crew seats and workstations.
- (b) [AOC] No AOC holder may operate a passenger-carrying helicopter with a maximum approved passenger seating configuration of more than 19 unless a public address system is installed that:
 - (1) Operates independently of the interphone systems except for handsets, headsets, microphones, selector switches, and signalling devices;
 - (2) Is readily accessible for immediate use from each required flight crew member station;
 - (3) For each required floor-level passenger emergency exit that has an adjacent cabin crew seat, has a microphone that is readily accessible to the seated cabin crew member, except that one microphone may serve more than one exit, provided the proximity of the exits allows unassisted verbal communication between seated cabin crew members;
 - (4) Is capable of operation within 10 seconds by a cabin crew member at each of those stations in the compartment from which its use is accessible;
 - (5) Is audible and intelligible at all passenger seats, lavatories, and cabin crew seats and workstations; and
 - (6) Following a total failure of the normal electrical generating system, provides reliable operation for a minimum of 10 minutes.
- (c) [AOC] No AOC holder may operate a passenger-carrying helicopter with a maximum approved passenger seating configuration of more than 9 but less than 19 without a public address system installed unless:
 - (1) The helicopter is designed without a bulkhead between pilot and passengers; and
 - (2) The operator is able to demonstrate in a manner acceptable to the Authority that, when the helicopter is in flight, the pilot's voice is audible and intelligible at all passenger seats.

3.4 Microphones

- (a) EQUIPAGE. No person may operate the following aircraft or in the following conditions unless the aircraft is equipped with a boom or throat microphone available at each required flight crew member flight duty station:
 - (1) [AAC-Aeroplane] Any aeroplane in IFR conditions;
 - (2) [AOC-Aeroplane] Any aeroplane in commercial air transport operations; or
 - (3) [AAC-Helicopter] Any helicopter.
- (b) USAGE. All flight crew members required to be on flight deck duty shall communicate through boom or throat microphones under the following operations or conditions:
 - (1) [AAC-Aeroplane] During IFR operations;
 - (2) [AOC-Aeroplane] Below the transition level/altitude; or
 - (3) [AAC-Helicopter] At all times.

4. NAVIGATION EQUIPMENT

4.1 General

- (a) [AAC] No person may operate an aircraft unless the aircraft is equipped with navigation equipment that will enable it to proceed in accordance with:
 - (1) Its operational flight plan; and
 - (2) The requirements of ATS.
- (b) No person may operate an aircraft in defined portions of airspace, including MNPS, RVSM, or any other routes where a navigation specification for PBN has been prescribed, unless:
 - (1) Information relevant to the aircraft navigation specification capabilities is listed in the AFM or other aircraft documentation approved by the State of Design;
 - (2) The aircraft is equipped with the navigation equipment to enable it to operate in accordance with the prescribed navigation specification(s);
 - (3) The aircraft is equipped with navigation equipment that continuously provides information to the flight crew of adherence to or departure from track with respect to the required degree of accuracy at any point along that track; and
 - (4) Where the aircraft is operated in accordance with a MEL, information relevant to the aircraft navigation specification capabilities is included in the MEL.
- (c) No person shall operate an aircraft unless the aircraft has sufficient navigation equipment that will enable the aircraft to navigate in accordance with paragraphs 4.1.1(a) and (b) of this subsection, such that:
 - (1) In the event of the failure of any piece of navigation equipment at any stage of flight, the remaining equipment will enable the aircraft to continue to navigate; and
 - (2) The failure of any single unit required for communication, navigation, or surveillance purposes, or any combination thereof, will not result in the failure of another unit required for communication, navigation, or surveillance purposes.
- ~~(d)~~ No person shall operate an aircraft in PBN operations unless such operations have been approved by the Authority.
- (e) When and where a navigation specification for PBN has been prescribed by the Authority, the operator shall establish and document the following before using the PBN procedure:
 - (1) Normal and abnormal procedures, including contingency procedures;

- (2) Flight crew qualification and proficiency requirements, in accordance with the appropriate navigation specifications;
 - (3) A training programme for relevant personnel, consistent with the intended operations; and
 - (4) Appropriate maintenance procedures to ensure continuing airworthiness, in accordance with the appropriate navigation specifications.
- (f) The equipment requirements in paragraph 4.1.1(a) of this subsection do not apply in instances where the Authority has authorised VFR by visual reference to landmarks.
 - (g) [AAC] No person may operate an aeroplane under IFR, or under VFR over routes that cannot be navigated by reference to visual landmarks, unless the aeroplane is equipped with navigation equipment in accordance with the requirements of ATS in the area(s) of operation.
 - (h) [AAC] All aircraft intended to land in IMC or at night shall be provided with radio navigation equipment capable of receiving signals providing guidance to:
 - (1) A point from which a visual landing may be effected;
 - (2) Each aerodrome at which it is intended to land in IMC; and
 - (3) Any designated alternate aerodromes.

4.2 Surveillance Equipment

- (a) No person may operate an aircraft unless it is provided with surveillance equipment that will enable it to operate in accordance with the requirements of ATS.
- (b) For operations where surveillance equipment is required to meet an RSP specification for PBS, an aircraft shall, in addition to the requirements specified in paragraph 4.1.2(a) of this subsection:
 - (1) Be provided with surveillance equipment that will enable it to operate in accordance with the prescribed RSP specification(s);
 - (2) Have information relevant to the aircraft RSP specification capabilities listed in the AFM or other aircraft documentation approved by the Authority; and
 - (3) Have information relevant to the aircraft RSP specification capabilities included in the MEL.
- (c) When and where an RSP specification for PBS has been prescribed by the Authority, the operator shall establish and document the following before using the PBS procedure:
 - (1) Normal and abnormal procedures, including contingency procedures;
 - (2) Flight crew qualification and proficiency requirements, in accordance with appropriate RSP specifications;
 - (3) A training programme for relevant personnel, consistent with the intended operations; and
 - (4) Appropriate maintenance procedures to ensure continuing airworthiness, in accordance with appropriate RSP specifications.
- (d) The operator shall:
 - (1) Provide to the Authority the reports of observed surveillance performance issued by established monitoring programmes (ATS); and
 - (2) Take immediate corrective action for individual aircraft or aircraft types identified in such reports as not complying with the RSP specification(s).

4.3 Minimum Navigation Performance Specifications

- (a) [AAC] No person may operate an aeroplane in MNPS airspace unless the aeroplane is equipped with navigation equipment that:
 - (1) Continuously provides indications to the flight crew of adherence to or departure from track to the required degree of accuracy at any point along that track; and
 - (2) Has been authorised by the Authority for the MNPS operations concerned through either operations specifications, for non-AOC holders, or a letter of authorisation, for general aviation.
- (b) [AAC] The navigation equipment required for operations in MNPS airspace shall be visible and usable by either pilot seated at his or her duty station.
- (c) [AAC] For unrestricted operation in MNPS airspace, an aeroplane shall be equipped with two independent LRNS.
- (d) [AAC] For operation in MNPS airspace along notified special routes, an aeroplane shall be equipped with one LRNS, unless otherwise specified.

4.4 Reduced Vertical Separation Minimum

- (a) [AAC] For flights in defined portions of airspace where, based on a Regional Air Navigation Agreement, an RVSM of 300 m (1 000 ft) is applied between FL 290 and FL 410 inclusive, an aeroplane:
 - (1) Shall have equipment that is capable of:
 - (i) Indicating to the flight crew the flight level being flown;
 - (ii) Automatically maintaining a selected flight level;
 - (iii) Providing an alert to the flight crew when a deviation occurs from the selected flight level; the threshold for the alert shall not exceed ± 90 m (300 ft); and
 - (iv) Automatically reporting pressure altitude.
 - (2) Shall be authorised for operation in the airspace concerned by:
 - (i) The State of the Operator through operations specifications, for AOC holders; or
 - (ii) The State of Registry through a specific approval for operations for non-AOC holders.
- (b) Prior to granting the RVSM specific approval required by paragraph 4.1.4(a)(2) of this subsection, the Authority shall be satisfied that:
 - (1) The vertical navigation performance capability of the aeroplane satisfies the requirements specified in IS 4.1.4;
 - (2) The operator has instituted appropriate procedures with respect to continuing airworthiness (maintenance and repair) practices and programmes; and
 - (3) The operator has instituted appropriate flight crew procedures for operations in RVSM airspace.
- (c) RVSM. Sierra Leone, in consultation with the State of Registry, if appropriate, shall ensure that, with respect to those aeroplanes mentioned in paragraph 4.1.4(a)(2) of this subsection, adequate provisions exist for:
 - (1) Receiving the reports of height-keeping performance issued by the monitoring agencies established in accordance with SLCARs Part 11: 3.3.5.1; and
 - (2) Taking immediate corrective action for individual aircraft, or aircraft type groups, identified in such reports as not complying with the height-keeping requirements for operations in airspace where RVSM is applied.

- (d) An operator with RVSM specific approval shall ensure that a minimum of two aeroplanes of each aircraft type grouping of the operator have their height-keeping performance monitored at least once every 2 years or within intervals of 1 000 flight hours per aeroplane, whichever period is longer. If an operator aircraft type grouping consists of a single aeroplane, monitoring of that aeroplane shall be accomplished within the specified period.
- (e) An operator shall ensure that each aeroplane shall be sufficiently provided with navigation equipment to ensure that, in the event of the failure of one item of equipment at any stage of the flight, the remaining equipment will enable the aeroplane to navigate in accordance with paragraphs 4.1.1(a) and (b) and 4.1.3 and 4.1.4 of this subsection.
- (f) The Authority will take appropriate action with respect to aircraft and operators found to be operating in RVSM airspace in Sierra Leone without a valid RVSM specific approval.

4.5 Electronic Navigation Data Management

- (a) [AAC] No person shall employ electronic navigation data products that have been processed for application in the air and on the ground unless the Authority has approved:
 - (1) The operator's procedures for ensuring that the process applied and the products delivered have met acceptable standards of integrity and that the products are compatible with the intended function of the equipment that will use them;
 - (2) The operator's programme for continual monitoring of both the process and products; and
 - (3) The operator's procedures to ensure the timely distribution and insertion of current and unaltered electronic navigation data to all aircraft that require it.

4.6 Pressure-Altitude Reporting Transponder

- (a) [AAC] No person may operate an aeroplane or helicopter unless the aeroplane or helicopter is equipped with an operative pressure-altitude reporting transponder that operates in accordance with the requirements of Sierra Leone ATS and the relevant provisions of SLCARs Part 10D.
- (b) [AAC] No person may operate an aircraft in airspace that requires a pressure-altitude reporting transponder unless that equipment is operative.
- (c) [AOC] No person may operate an aeroplane unless the aeroplane is equipped with a data source that provides pressure altitude information with a resolution of 7.62 m (25 ft) or better.
- (d) [AOC] No person may operate an aeroplane that is equipped with an automatic means of detecting airborne or on-the-ground status unless the aeroplane is equipped with a Mode S transponder.

5 AIRCRAFT LIGHTS AND INSTRUMENT ILLUMINATION

5.1 Engine Instruments

- (a) [AAC] Unless the Authority allows or requires different instrumentation for turbine-engine-powered aeroplanes to provide equivalent safety, no person may operate any powered aircraft without the following engine instruments:
 - (1) A means for indicating fuel quantity in each fuel tank to be used;
 - (2) An oil pressure indicator for each engine;
 - (3) An oil temperature indicator for each engine;

- (4) A manifold pressure indicator for each engine; and
- (5) A tachometer for each engine.
- (b) [AOC] Unless the Authority allows or requires different instrumentation for turbine-engine-powered aeroplanes to provide equivalent safety, in addition to the listed equipment requirements in paragraph 5.1.1(a) of this subsection, no person may operate any powered aircraft without the following engine instruments:
 - (1) A carburettor air temperature indicator for each reciprocating engine;
 - (2) A cylinder head temperature indicator for each air-cooled reciprocating engine;
 - (3) A fuel pressure indicator for each engine;
 - (4) A fuel flowmeter or fuel mixture indicator for each engine not equipped with an automatic altitude mixture control;
 - (5) An oil quantity indicator for each oil tank when a transfer or separate oil reserve supply is used;
 - (6) An independent fuel pressure warning device for each engine or a master warning device for all engines with a means for isolating the individual warning circuits from the master warning device; and
 - (7) A device for each reversible propeller, to indicate to the pilot when the propeller is in reverse pitch, that complies with the following:
 - (i) The device may be actuated at any point in the reversing cycle between the normal low pitch stop position and full reverse pitch, but it may not give an indication at or above the normal low pitch stop position; and
 - (ii) The source of indication shall be actuated by the propeller blade angle or shall be directly responsive to it.

5.1 Required Aircraft Lights and Instrument Illumination

- (a) [AAC] All aircraft operated at night shall be equipped with:
 - (1) A landing light;
 - (2) Navigation/position lights;
 - (3) Illumination for all flight instruments and equipment that are essential for the safe operation of the aircraft;
 - (4) Lights in all passenger compartments; and
 - (5) An independent portable light for each crew member station (approval not required).
- (b) All aircraft type certificated with an aviation red or an aviation white anti-collision system shall have the anti-collision system operative in both day and night. In the event of the failure of any light of the anti-collision light system, operation of the aircraft may continue to a location where repairs or replacement can be made.

5.2 Required Aircraft Lights and Instrument Illumination for Commercial Air Transport Operations

- (a) [AOC] No person may operate an aircraft in commercial air transport operations unless the aircraft is equipped with:

- (1) Two landing lights or a single light having two separately energised filaments;
- (2) An anti-collision light system;
- (3) Illumination for all flight instruments and equipment that are essential for the safe operation of the aircraft;
- (4) Lights in all passenger compartments;
- (5) An independent portable light for each crew member station;
- (6) Navigation/position lights;
- (7) Lights to conform to the International regulations for preventing collisions at sea, if the aircraft is a seaplane or an amphibian aircraft; and
- (8) For helicopters – a landing light that is trainable, at least in the vertical plane.

6 RESERVED

7 WARNING INSTRUMENTS AND SYSTEMS

7.1 MACH Number Indicator

[AAC] All aeroplanes with speed limitations expressed in terms of Mach number shall be equipped with a Mach number indicator.

7.2 Loss of Pressurisation Indicator

[AAC] All pressurised aircraft intended to be operated at flight altitudes above 25 000 ft (7 600 m) shall be equipped with a device to provide positive warning to the flight crew of any dangerous loss of pressurisation.

7.3 Landing Gear Indicator Position and Aural Warning Device

- (a) [AAC] Each powered civil aircraft with retractable landing gear shall have a landing gear indicator position.
- (b) [AOC] Each aeroplane with retractable landing gear shall have an aural warning device that functions continuously under the following conditions:
 - (1) For aeroplanes with an established approach wing-flap position, whenever the wing flaps are extended beyond the maximum certificated approach climb configuration position in the AFM and the landing gear is not fully extended and locked; and
 - (2) For aeroplanes without an established approach climb wing-flap position, whenever the wing flaps are extended beyond the position at which landing gear extension is normally performed and the landing gear is not fully extended and locked.
- (c) [AOC] The warning system required by paragraph 7.1.3(b) of this subsection:
 - (1) Shall not have a manual shutoff;
 - (2) Shall be in addition to the throttle-actuated device installed under the type certification airworthiness requirements; and
 - (3) May utilise any part of the throttle-actuated system, including the aural warning device.
- (d) [AOC] The flap position sensing unit required to comply with paragraph 7.1.3(b) of this subsection may be installed at any suitable place in the aeroplane.

7.4 Altitude Alerting System

- (a) [AAC] No person may operate a turbine-engined aeroplane with a maximum certificated take-off mass of over 5 700 kg or having a maximum approved passenger seating configuration of more than nine seats, or a turbojet-powered aeroplane, unless the aeroplane is equipped with an altitude alerting system capable of:
 - (1) Alerting the flight crew upon approaching a preselected altitude in either ascent or descent; and
 - (2) Alerting the flight crew by at least an aural signal when deviating above or below a preselected altitude.
- (b) [AAC] For operations in defined portions of airspace where, based on a Regional Air Navigation Agreement, an RVSM of 300 m (1 000 ft) is applied between FL 290 and FL 410, an aircraft shall be provided with equipment that is capable of providing an alert to the flight crew when a deviation occurs from the selected flight level. The threshold for the alert may not exceed ± 90 m (300 ft).

7.5 Ground Proximity Warning System

- (a) No operator may operate a turbine-engined aeroplane, or a reciprocating-engine aeroplane of a maximum certificated take-off mass of over 5 700 kg or authorised to carry more than nine passengers, unless the aeroplane is equipped with a GPWS that has a forward looking terrain avoidance function.
- (b) The operator shall implement database management procedures that ensure the timely distribution and update of current terrain and obstacle data to the GPWS.
- (c) All turbine-engined aeroplanes of a maximum certificated take-off mass of 5 700 kg or less and authorized to carry more than five, but not more than nine, passengers for which the individual certificate of airworthiness is first issued on or after 1 January 2026, shall be equipped with a ground proximity warning system which provides the warnings of 7.5 (d)(1) and 7.5(d)(3) and warning of unsafe terrain clearance, and a forward looking terrain avoidance function.
- (d) Each GPWS shall automatically provide, by means of aural signals that may be supplemented by visual signals, timely and distinctive warning to the flight crew of the following circumstances:
 - (1) Excessive descent rate;
 - (2) Excessive terrain closure rate;
 - (3) Excessive altitude loss after take-off or go-around;
 - (4) Unsafe terrain clearance while not in landing configuration:
 - (i) Gear not locked down; and
 - (ii) Flaps not in a landing position; and
 - (5) Excessive descent below the instrument glide path.

7.6 Weather RADAR

- (a) No person may operate an aeroplane in commercial air transport operations when carrying passengers in an area where thunderstorms or other potentially hazardous weather conditions may be expected unless the aeroplane is equipped with weather radar.

- (b) No person may operate a helicopter in commercial air transport operations when carrying passengers in an area where thunderstorms or other potentially hazardous weather conditions may be expected unless the helicopter is equipped with weather radar.

7.7 Airborne Collision Avoidance System

- (a) Any ACAS installed on an aircraft in Sierra Leone shall be approved by the Authority.
- (b) Each person operating an aircraft equipped with an ACAS shall have that system on and operating.
- (c) No person may operate a turbine-engined aeroplane with a maximum certificated take-off mass of over 5 700 kg, or that is authorised to carry more than 19 passengers, unless the aeroplane is equipped with an ACAS II.
- (d) An ACAS shall operate in accordance with the relevant provisions of SLCARs Part 10D.
- (e) No person may operate a turbine-engined aeroplane with a maximum certificated take-off mass of over 5 700 kg, or that is authorised to carry more than 19 passengers, unless the aeroplane is equipped with an ACAS II.

7.8 Forward Looking Wind Shear Warning System – Turbojet Aeroplanes

- (a) All turbojet aeroplanes with a maximum certificated take-off mass of over 5 700 kg or authorised to carry more than nine passengers shall be equipped with a forward looking wind shear warning system.
- (b) The forward looking wind shear warning system shall be capable of providing the pilot with a timely aural and visual warning of wind shear ahead of the aircraft and the information required to permit the pilot to safely commence and continue a missed approach or go-around or to execute an escape manoeuvre if necessary.
- (c) The forward looking wind shear warning system shall also provide an indication to the pilot when the limits specified for the certification of automatic landing equipment are being approached, when such equipment is in use.

7.9 Location of an Aeroplane in Distress

- (a) No person may operate an aeroplane with a maximum certificated take-off mass of over 5 700 kg, for which the certificate of airworthiness is first issued on or after 01 January 2023, unless the aeroplane is equipped to autonomously transmit information from which a position can be determined by the operator at least once every minute, when in distress.
- (b) ACTIVATION/DEACTIVATION. The equipment shall:
 - (1) Automatically activate immediately or within 5 seconds after detection of an activation event;
 - (2) Be capable of manual activation; and
 - (3) Be capable of deactivation using the same mechanism that activated it.
- (c) TRANSMISSION. The equipment shall meet the following criteria:
 - (1) Location within a 6 NM radius, including after any accident;
 - (2) Timestamp of the position information; and
 - (3) The accuracy of position information shall, as a minimum, meet the position accuracy requirements established for ELTs.

- (d) The operator shall make position information of a flight in distress available to the appropriate organisations, as established by the Authority.
- (e) As of 1 January 2025, all aeroplanes of a maximum certificated take-off mass of over 27 000 kg for which the individual certificate of airworthiness is first issued on or after 1 January 2024, shall autonomously transmit information from which a position can be determined by the operator at least once every minute, when in distress, in accordance with SLCAR Part 25, IS 7.9.

7.10 Turbine Aeroplane - Runway Overrun Awareness and Alerting System (ROAAS)

All turbine-engined aeroplanes of a maximum certificated take-off mass in excess of 5 700 kg, for which the individual certificate of airworthiness is first issued on or after 1 January 2026, shall be equipped with a runway overrun awareness and alerting system (ROAAS).

8 FLIGHT RECORDERS

8.1 Flight Recorders

8.1.1 Flight Recorder Systems

- (a) Crash-protected flight recorders, for both aeroplanes and helicopters, shall comprise one or more of the following:
 - (1) An FDR;
 - (2) A CVR;
 - (3) An AIR; or
 - (4) A DLR.
- (b) Lightweight flight recorders for aeroplanes shall comprise one or more of the following:
 - (1) An ADRS;
 - (2) A CARS;
 - (3) An AIRS; or
 - (4) A DLRS.
- (c) Combination recorders (FDR/CVR) may be used to meet the equipage requirements for helicopters.

8.1.2 Construction and Installation

- (a) Flight recorders shall be constructed, located, and installed so as to provide maximum practical protection for the recordings in order that the recorded information may be preserved, recovered, and transcribed. Flight recorders shall meet the prescribed crashworthiness and fire protection specifications.
- (b) Non-deployable flight recorder containers shall be painted a distinctive orange colour.
- (c) Non-deployable crash-protected flight recorders shall:
 - (1) Carry reflective material to facilitate their location; and
 - (2) Have securely attached an automatically activated underwater locating device operating at a frequency of 37.5 kHz this device shall operate for a minimum of 90 days.
- (d) ADFR containers shall:

- (1) Be painted a distinctive orange colour; however, the surface visible from outside the aircraft may be of another colour;
 - (2) Carry reflective material to facilitate their location;
 - (3) Have an integrated automatically activated ELT; and
 - (4) Have specific requirements that can be found in IS 8.1.2.
- (e) Flight recorder systems shall be installed so that:
- (1) The probability of damage to the recordings is minimised;
 - (2) There is an aural or visual means for pre-flight checking that the flight recorder systems are operating properly; and
 - (3) If the flight recorder systems have an erasure device, the installation shall be designed to prevent operation of the device during flight time or crash impact;
 - (4) For aircraft for which the individual certificate of airworthiness is first issued on or after 01 January 2023, a flight-crew-operated erase function shall be provided on the flight deck which, when activated, modifies the recording of a CVR and AIR so that it cannot be retrieved using normal replay or copying techniques. The installation shall be designed to prevent activation during flight. In addition, the probability of an inadvertent activation of an erase function during an accident shall also be minimised; and
 - (5) They meet the prescribed crashworthiness and fire protection specifications.
- (f) The crash-protected flight recorders shall be installed so that they receive electrical power from a bus that provides the maximum reliability for operation of the flight recorders without jeopardising service to essential or emergency loads.
- (g) The lightweight flight recorders shall be connected to a power source having the characteristics which ensure proper and reliable recording in the operational environment.
- (h) The flight recorder systems, when tested by methods approved by the State of Design, shall be demonstrated to be suitable for the environmental extremes over which they are designed to operate.
- (i) Means shall be provided for an accurate time correlation between the flight recorder systems' recordings.
- (j) The holder of the airworthiness approval for the installation design of the flight recorder system shall make available the relevant continuing airworthiness information to the operator of the aeroplane to be incorporated in the continuing airworthiness maintenance programme. This continuing airworthiness information shall cover in detail all the tasks required to ensure the continued serviceability of the flight recorder system.
- (k) The flight recorder system manufacturer shall provide the State of Design with the following information with respect to the flight recorder systems:
- (1) Manufacturer's operating instructions, equipment limitations, and installation procedures;
 - (2) Manufacturer's test reports;
 - (3) For aeroplane flight recording systems, parameter origin or source and equations that relate counts to units of measurement.
 - (4) Detailed to ensure continued serviceability of the flight recorder system.

8.1.3 Operation

- (a) Flight recorder systems shall not be switched off during flight time.

- (b) To preserve flight recorder records, flight recorders shall be deactivated upon completion of flight time following an accident or incident. The flight recorders shall not be reactivated before their disposition as determined in accordance with the accident/incident regulations of Sierra Leone.
- (c) The operator/owner of the aircraft, or in the case where it is leased, the lessee, shall ensure, to the extent possible, in the event the aircraft becomes involved in an accident or incident, the preservation of all related flight recorder records and, if necessary, the associated flight recorders, and their retention in safe custody pending their disposition as determined in accordance with SLCAR Part 13

8.1.4 Continued Serviceability and Inspection of Flight Recorder Systems

- (a) The operator shall conduct operational checks and evaluations of recordings from the flight recorder systems to ensure the continued serviceability of the recorders.
- (b) The procedures for the inspection of the flight recorder systems are prescribed in IS 8.1.4.

8.1.5 Flight Recorder Electronic Documentation

Operators shall provide to Sierra Leone Accident Investigation Authority, the documentation of flight recording systems parameters in electronic format and in accordance with [INDUSTRY SPECIFICATIONS].

8.1.6 Combination Recorders

- (a) No person may operate an aeroplane of a maximum certificated take-off mass of over 5 700 kg which is required to be equipped with both an FDR and a CVR unless the aeroplane is equipped with:
 - (1) An FDR and a CVR; or
 - (2) Two combination recorders (FDR/DVR).
- (b) No person may operate an aeroplane of a maximum certificated take-off mass of over 5 700 kg which is required to be equipped with both an FDR and a CVR unless:
 - (1) The aeroplane is equipped with an FDR and a CVR or, alternatively, equipped with two combination recorders (FDR/CVR); or
 - (2) For aeroplanes type certificated on or after 01 January 2016, the aeroplane is equipped with two combination recorders (FDR/CVR).
- (c) No person may operate an aeroplane of a maximum certificated take-off mass of over 15 000 kg which is required to be equipped with both a CVR and an FDR and was type certificated on or after 01 January 2016 unless:
 - (1) The aeroplane is equipped with two combination recorders (FDR/CVR); and
 - (2) One recorder is located as close to the flight deck as practicable and the other recorder located as far aft as practicable.
- (d) No person may operate a multi-engined turbine-engined aeroplane of a maximum certificated take-off mass of 5 700 kg or less unless the aeroplane is equipped with:
 - (1) An FDR and/or a CVR; or

- (2) One combination recorder (FDR/CVR).

8.1.7 Flight Recorder Data Recovery

- (a) All aeroplanes of a maximum certificated take-off mass of over 27 000 kg which are authorised to carry more than 19 passengers, and for which the application for type certification is submitted to a Contracting State on or after 01 January 2021, shall be equipped with a means approved by the Authority to recover flight recorder data and make it available in a timely manner.
- (b) In approving the means to make flight recorder data available in a timely manner, the Authority shall take into account the following:
 - (1) The capabilities of the operator;
 - (2) Overall capability of the aeroplane and its systems as certified by State of Design;
 - (3) The reliability of the means to recover the appropriate CVR channels and appropriate FDR data; and
 - (4) Specific mitigation measures.

8.2 Flight Data Recorders and Aircraft Data Recording Systems

The FDR or ADRS shall start to record prior to the aircraft moving under its own power and shall record continuously until the termination of the flight when the aircraft is no longer capable of moving under its own power.

8.2.1 Types and Parameters

- (a) AEROPLANE. Aeroplane FDR shall record the parameters prescribed in IS 8.2.1(A).
- (b) HELICOPTER. Helicopter FDR shall record the parameters prescribed in IS 8.2.1(B).

8.2.2 Aircraft Equipage for Operations

- (a) No person may operate the following aeroplane unless the aeroplane is equipped with an FDR capable of recording the aural environment of the flight deck during flight time.
- (b) All turbine-engined aeroplanes with a seating configuration of more than 5 passenger seats and a maximum certificated take-off mass of 5 700 kg or less, for which the application for a TC is first made to the appropriate Authority on or after 01 January 2016, shall be equipped with:
 - (1) An FDR that shall record at least the first 16 parameters prescribed in IS 8.2.1(A);
 - (2) A Class C AIR or AIRS that shall record at least the flight path and speed parameters displayed to the pilot(s) as prescribed in IS 8.2.2; or
 - (3) An ADRS that shall record at least the first 7 parameters prescribed in IS 8.2.2.
 - (i) If further ADRS recording capacity is available, the recording of any parameters from 8 onwards defined in IS 8.2.2 shall be considered.
- (c) All turbine-engined aeroplanes of a maximum certificated take-off mass of 5 700 kg or less, for which the individual certificate of airworthiness is first issued on or after 01 January 2016, shall be equipped with:
 - (1) An FDR that shall record at least the first 16 parameters prescribed in IS 8.2.1(A);

- (2) A Class C AIR or AIRS that shall record at least the flight path and speed parameters displayed to the pilot(s) as defined in IS 8.2.2; or
- (3) An ADRS that shall record at least the first 7 parameters listed in IS 8.2.2.
- (d) All aeroplanes of a maximum certificated take-off mass of over 27 000 kg, for which the individual certificate of airworthiness is first issued on or after 01 January 1989, shall be equipped with an FDR that shall record at least the first 32 parameters prescribed in IS 8.2.1(A).
- (e) All aeroplanes of a maximum certificated take-off mass of over 5 700 kg, up to and including 27 000 kg, for which the individual certificate of airworthiness is first issued on or after 01 January 1989, shall be equipped with an FDR that shall record at least the first 16 parameters prescribed in IS 8.2.1(A).
- (f) All multi-engined turbine-engined aeroplanes of a maximum certificated take-off mass of 5 700 kg or less, for which the individual certificate of airworthiness is first issued on or after 01 January 1990, shall be equipped with an FDR that shall record at least the first 16 parameters prescribed in IS 8.2.1(A).
- (g) All turbine-engined aeroplanes with a maximum certificated take-off mass of over 5 700 kg, except those in paragraph 8.1.2(h) of this Part, for which the individual certificate of airworthiness was first issued before 01 January 1989, shall be equipped with an FDR that shall record at least the first five parameters prescribed in IS 8.2.1(A).
- (h) All turbine-engined aeroplanes with a maximum certificated take-off mass of over 5 700 kg, except those in 8.1.2 of this Part, for which the individual certificate of airworthiness was first issued on or after 01 January 1987 but before 01 January 1989, shall be equipped with an FDR that shall record at least the first nine parameters prescribed in IS 8.2.1(A).
- (i) All turbine-engined aeroplanes with a maximum certificated take-off mass of over 27 000 kg, for which the individual certificate of airworthiness was first issued on or after 01 January 1987 but before 01 January 1989, that are of types of which the prototype was certificated by the appropriate Authority after 30 September 1969, shall be equipped with an FDR that shall record at least the first 16 parameters prescribed in IS 8.2.1(A).
- (j) [AOC] All turbine-engined aeroplanes with a maximum certificated take-off mass of over 27 000 kg, for which the individual certificate of airworthiness was first issued before 01 January 1987, that are of types of which the prototype was certificated by the appropriate Authority after 30 September 1969, shall be equipped with an FDR that shall record, in addition to the first five parameters prescribed in IS 8.2.1(A), such additional parameters as are necessary to meet the objectives of determining:
 - (1) The attitude of the aeroplane in achieving its flight path; and
 - (2) The basic forces acting upon the aeroplane resulting in the achieved flight path and the origin of such basic forces.
- (k) [AAC] All aeroplanes of a maximum certificated take-off mass of over 5 700 kg, for which the individual certificate of airworthiness is first issued after 01 January 2005, shall be equipped with an FDR that shall record at least the first 78 parameters prescribed in IS 8.2.1(A).

- (l) All aeroplanes of a maximum certificated take-off mass of over 5 700 kg, for which the application for type certification is submitted on or after 01 January 2023, shall be equipped with an FDR capable of recording at least the 82 parameters prescribed in IS 8.2.1(A).
- (m) All aeroplanes of a maximum certificated take-off mass of over 5 700 kg, for which the individual certificate of airworthiness is first issued on or after 01 January 2023, shall be equipped with an FDR capable of recording at least the 82 parameters prescribed in IS 8.2.1(A).
- (n) No person may operate the following helicopter unless the helicopter is equipped with an FDR capable of recording the aural environment of the flight deck during flight time.
- (o) [AAC] All helicopters with a maximum certificated take-off mass of over 3 175 kg, for which the individual certificate of airworthiness is first issued on or after 01 January 2016, shall be equipped with an FDR that shall record at least the first 48 parameters prescribed in IS 8.2.1(B).
- (p) [AAC] All helicopters with a maximum certificated take-off mass of over 7 000 kg, or having a passenger seating configuration of more than 19, for which the individual certificate of airworthiness is first issued on or after 01 January 1989, shall be equipped with an FDR that shall record at least the first 30 parameters prescribed in IS 8.2.1(B).
- (q) [AAC] All helicopters with a maximum certificated take-off mass of over 3 175 kg, up to and including 7 000 kg, for which the individual certificate of airworthiness is first issued on or after 01 January 1989, shall be equipped with an FDR that shall record at least the first 15 parameters prescribed in IS 8.2.1(B).
- (r) [AOC] All turbine-engined helicopters of a maximum certificated take-off mass of over 2 250 kg, up to and including 3 175 kg, for which the application for a TC is first made to the appropriate Authority on or after 01 January 2018, shall be equipped with:
 - (1) An FDR that shall record at least the first 48 parameters prescribed in IS 8.2.1(B);
 - (2) A Class C AIR or AIRS that shall record at least the flight path and speed parameters displayed to the pilot(s), as defined in IS 8.2.2; or
 - (3) An ADRS that shall record the first 7 parameters prescribed in IS 8.2.2.
- (s) [AOC] All helicopters of a maximum certificated take-off mass of 3 175 kg or less, for which the individual certificate of airworthiness is first issued on or after 01 January 2018, shall be equipped with:
 - (1) An FDR that shall record at least the first 48 parameters prescribed in IS 8.2.1(B);
 - (2) A Class C AIR or AIRS that shall record at least the flight path and speed parameters displayed to the pilot(s), as defined in IS 8.2.2; or
 - (3) An ADRS that shall record the first 7 parameters prescribed in IS 8.2.2.
- (t) All helicopters of a maximum certificated take-off mass of over 3 175 kg, for which the application for type certification is submitted on or after 01 January 2023, shall be equipped with an FDR capable of recording at least the 53 parameters prescribed in IS 8.2.1(B).
- (u) All helicopters of a maximum certificated take-off mass of over 3 175 kg for which the individual certificate of airworthiness is first issued on or after 01 January 2023 shall be equipped with an FDR capable of recording at least the 53 parameters prescribed in IS 8.2.1(B)

8.2.3 Recording Technology

FDRs, ADRS, AIRs, or AIRS shall not use engraving metal foil, frequency modulation, photographic film, or magnetic tape in aircraft registered in Sierra Leone or operated in commercial air transport operations in Sierra Leone.

8.2.4 Duration

- (a) FDRs on aeroplanes shall be capable of retaining the information recorded during at least the last 25 hours of operation, with the exception of those installed on aeroplanes referenced in paragraph 8.2.2(f) of this Part for which the FDR shall retain the information recorded during at least the last 30 minutes of operation, and, in addition, sufficient information from the preceding take-off for calibration purposes.
- (b) FDRs on helicopters shall retain the information recorded during at least the last 10 hours of operation.

8.3 Cockpit Voice Recorders and Cockpit Audio Recording Systems

8.3.1 Start and Stop Logic – Cockpit Voice Recorders and Cockpit Audio Recording Systems

- (a) The CVR and CARS shall start to record prior to the aircraft moving under its own power and shall record continuously until the termination of the flight when the aircraft is no longer capable of moving under its own power.
- (b) In addition, depending on the availability of electrical power, the CVR or CARS shall start to record as early as possible during the flight deck checks prior to engine start at the beginning of the flight until the flight deck checks immediately following engine shutdown at the end of the flight.
- (c) The CVR shall record simultaneously on four separate channels, or more, at least the following:
 - (1) Voice communication transmitted from or received in the aircraft by radio;
 - (2) Aural environment on the flight deck;
 - (3) Voice communication of flight crew members on the flight deck using the aircraft's interphone system, if installed; and
 - (4) Digital communications with ATS, unless recorded by the FDR.
- (d) The preferred CVR audio allocation shall be as follows:
 - (1) PIC audio panel;
 - (2) Co-pilot audio panel;
 - (3) Additional flight crew positions and time reference; and
 - (4) Flight deck area microphone.
- (e) The CARS shall record simultaneously on two separate channels, or more, at least the following:
 - (1) Voice communication transmitted from or received in the aircraft by radio;
 - (2) Aural environment on the flight deck; and
 - (3) Voice communication of flight crew members on the flight deck using the aircraft's interphone, if installed.

- (f) The preferred CARS audio allocation shall be as follows:
 - (1) Voice communication; and
 - (2) Aural environment on the flight deck.
- (g) On a tape-based CVR, to ensure accurate time correlation between channels, the recorder shall record in an in-line format. If a bi-directional configuration is used, the in-line format and channel allocation shall be retained in both directions.

8.3.2 Aircraft Equipage for Operations Using CVR and CARS

- (a) No person may operate an aeroplane unless the aeroplane is equipped with a CVR and CARS as listed below:
 - (1) [AAC] All turbine-engined aeroplanes required to be operated by more than one pilot and for which the application for a TC is first submitted to the appropriate Authority on or after 01 January 2016 shall be equipped with either a CVR or a CARS.
 - (2) [AAC] All aeroplanes of a maximum certificated take-off mass of over 5 700 kg, for which the individual certificate of airworthiness is first issued on or after 01 January 1987, shall be equipped with a CVR.
 - (3) [AOC] All aeroplanes of a maximum certificated take-off mass of over 5 700 kg, for which the individual certificate of airworthiness is first issued on or after 01 January 2003, shall be equipped with a CVR capable of retaining the information recorded during at least the last 2 hours of its operation.
 - (4) [AOC] All aeroplanes of a maximum certificated take-off mass of over 5 700 kg, for which the individual certificate of airworthiness is first issued on or after 01 January 1987, shall be equipped with a CVR.
 - (5) [AOC] All turbine-engined aeroplanes with a maximum certificated take-off mass of over 27 000 kg, for which the individual certificate of airworthiness was first issued before 01 January 1987, that are of types of which the prototype was certificated by the appropriate Authority after 30 September 1969, shall be equipped with a CVR.
 - (6) [AOC] All turbine-engined aeroplanes with a maximum certificated take-off mass of over 5 700 kg, up to and including 27 000 kg, for which the individual certificate of airworthiness was first issued before 01 January 1987, that are of types of which the prototype was certificated by the appropriate Authority after 30 September 1969, shall be equipped with a CVR.
- (b) No person may operate a helicopter unless the helicopter is equipped with a CVR as listed below:
 - (1) [AAC] All helicopters of a maximum certificated take-off mass of over 7 000 kg shall be equipped with a CVR. For helicopters not equipped with an FDR, at least main rotor speed shall be recorded on the CVR.
 - (2) [AAC] All helicopters of a maximum certificated take-off mass of over 3 175 kg, for which the individual certificate of worthiness is first issued on or after 01 January 1987, shall be equipped with a CVR. For helicopters not equipped with an FDR, at least main rotor speed shall be recorded on the CVR.

8.3.3 Discontinuation

CVRs and CARS shall not use magnetic tape or wire in aircraft registered in Sierra Leone or operated in commercial air transport operations in Sierra Leone.

8.3.4 Duration

- (a) A CVR shall retain the information recorded during at least the last 2 hours of its operation.
- (b) All aeroplanes of a maximum certificated take-off mass of over 27 000 kg, for which the individual certificate of airworthiness is first issued on or after 01 January 2022, shall be equipped with a CVR that shall retain the information recorded during at least the last 25 hours of its operation.
- (c) All aeroplanes that are required to be equipped with CARS, and for which the individual certificate of airworthiness is first issued on or after 01 January 2025, shall be equipped with a CARS that shall retain the information recorded during at least the last 2 hours of their operation.

8.3.5 Cockpit Voice Recorder Alternate Power Source

- (a) [AOC] No person may operate an aeroplane required to be equipped with a CVR unless the aeroplane is equipped with CVR alternate power that:
 - (1) Automatically engages and provides 10 minutes, plus or minus one minute, of operation whenever aeroplane power to the recorder ceases, either by normal shutdown or by any other loss of power;
 - (2) Powers the CVR and its associated flight deck area microphone components; and
 - (3) Is located as close as practicable to the alternate power source.
- (b) [AOC] No person may operate an aeroplane of a maximum certificated take-off mass of over 27 000 kg, for which the individual certificate of airworthiness is first issued on or after 01 January 2018, unless the aeroplane is equipped with an alternate power source, as described in paragraph 8.3.5(a) of this subsection, that powers:
 - (1) The forward CVR, in the case of combination recorders; or
 - (2) At least one CVR.

8.4 Data Link Recorders and Data Link Recording Systems

8.4.1 General

- (a) No person may operate an aeroplane or a helicopter for which the individual certificate of airworthiness is first issued on or after 01 January 2016, and which use any of the DLC applications referred to in IS 8.4.1 and are required to carry a CVR, unless the aircraft records the DLC messages on a crash-protected flight recorder.
- (b) No person may operate an aeroplane or a helicopter modified on or after 01 January 2016, which use any of the DLC applications referred to in IS 8.4.1, unless the aircraft records the DLC message on a crash-protected flight recorder or the installed DLC equipment is compliant with a TC issued or aircraft modification first approved prior to 01 January 20216.
- (c) No person may operate an aeroplane or a helicopter where the aircraft flight path is authorised or controlled through the use of data link messages, unless all data link messages, both uplinks to the aircraft and downlinks from the aircraft, are recorded on the aircraft. As far as

practicable, the time the messages were displayed to the flight crew and the time of the responses shall be recorded.

- (d) No person may operate an aeroplane or a helicopter where the individual certificate of airworthiness was first issued before 01 January 2016, that are required to carry a CVR and are modified on or after 01 January 2016 to use any of the DLC applications referred to in IS 8.4.1 shall record the DLC messages on a crash-protected flight recorder.

8.4.2 Duration

The minimum recording duration shall be equal to the duration of the CVR.

8.4.3 Correlation

Data link recording shall be correlated to the recorded flight deck audio.

8.5 Airborne Image Recorder and Airborne Image Recording System

- (a) No person shall operate an aircraft unless the AIR or AIRS shall start to record prior to the aircraft moving under its own power and shall record continuously until the termination of the flight when the aircraft is no longer capable of moving under its own power. In addition, depending on the availability of electrical power, the AIR or AIRS shall start to record as early as possible during the flight deck checks prior to engine start at the beginning of the flight until the flight deck checks immediately following engine shutdown at the end of the flight.
- (b) AIRs are classified as follows:
 - (1) A Class A AIR or AIRS captures the general flight deck area in order to provide data supplemental to conventional flight recorders.
 - (2) A Class B AIR or AIRS captures data link message displays.
 - (3) A Class C AIR or AIRS captures instruments and control panels.

8.6 Flight Crew-Machine Interface Recording

8.6.1 General

- (a) No person may operate an aeroplane of a maximum certificated take-off mass of over 5 700 kg, for which the individual certificate of airworthiness is first issued on or after 01 January 2023, unless the aeroplane shall be equipped with a crash-protected flight recorder that shall record the information displayed to the flight crew from electronic displays, as well as the operation of switches and selectors by the flight crew as defined in IS 8.2.1
- (b) No person shall operate an aircraft unless the AIR or AIRS shall start to record prior to the aircraft moving under its own power and record continuously until the termination of the flight when the aircraft is no longer capable of moving under its own power. In addition, depending on the availability of electrical power, the AIR or AIRS shall start to record as early as possible during the flight deck checks prior to engine start at the beginning of the flight until the flight deck checks immediately following engine shutdown at the end of the flight.

8.6.2 Applications to Be Recorded

- (a) The operation of switches and selectors and the information displayed to the flight crew from electronic displays shall be captured by sensors or other electronic means.
- (b) The recording of operation of switches and selectors by the flight crew shall include the following:
 - (1) Any switch or selector that will affect the operation and the navigation of the aircraft; and
 - (2) Selection of normal and alternate systems.
- (c) The recording of the information displayed to the flight crew from electronic displays shall include the following:
 - (1) Primary flight and navigation displays;
 - (2) Aircraft system monitoring displays;
 - (3) Engine indication displays;
 - (4) Traffic, terrain, and weather displays;
 - (5) Crew alerting systems displays;
 - (6) Stand-by instruments; and
 - (7) Installed EFB to the extent it is practical.
- (d) If image sensors are used, the recording of such images shall not capture the head and shoulders of the flight crew members whilst seated in their normal operating position.

8.6.3 Duration

The minimum flight crew-machine interface recording duration shall be at least for the last 2 hours.

8.6.4 Correlation

Flight crew-machine interface recordings shall be able to be correlated to the recorded flight deck audio.

9 EMERGENCY, RESCUE, AND SURVIVAL EQUIPMENT

9.1 Emergency Equipment – All Aircraft

- (a) [AAC] No person shall operate an aeroplane unless each item of emergency and flotation equipment is:
 - (1) Readily accessible to the crew and, with regard to equipment located in the passenger compartment, to passengers without appreciable time for preparatory procedures;
 - (2) Clearly identified and clearly marked to indicate its method of operation;
 - (3) Marked as to date of last inspection; and
 - (4) Marked as to contents when carried in a compartment or container.

9.2 Emergency Exit Equipment – Passengers

- (a) No person shall operate an aeroplane without the following emergency exit equipment:
 - (1) [AAC] Each passenger-carrying landplane emergency exit (other than over-the-wing) that is more than 1.8 m (6 ft) from the ground with the aeroplane on the ground and the landing gear extended shall have an approved means to assist the occupants in descending to the ground.

- (2) [AAC] Each passenger emergency exit, its means of access, and its means of opening shall be conspicuously marked by a sign visible to occupants approaching along the main passenger aisle.
- (3) [AAC] Each passenger-carrying aeroplane shall have an emergency lighting system, independent of the main lighting system, that:
 - (i) Illuminates each passenger exit marking and locating sign;
 - (ii) Provides enough general lighting in the passenger cabin; and
 - (iii)[AOC] Includes floor proximity emergency escape path marking.
 - (1) [AAC] Each passenger emergency exit and the means of opening that exit from the outside shall be marked on the outside of the aeroplane.
 - (2) [AAC] Each passenger-carrying aeroplane shall be equipped with a slip-resistant escape route that meets the requirements under which that aeroplane was type certified.
 - (3) Each passenger-carrying aeroplane shall meet the detailed requirements contained in IS 9.1.2.
- (b) No person shall operate a helicopter certificated with a maximum certificated take-off mass of 3 175 kg (7 000 lbs) or less and nine or less passenger seats without the following emergency exit equipment:
 - (1) NUMBER AND LOCATION.
 - (i) There shall be at least one emergency exit on each side of the cabin readily accessible to each passenger. One of these exits shall be usable in any probable attitude that may result from a crash.
 - (ii) Doors intended for normal use may also serve as emergency exits, provided that they meet the requirements of this section.
 - (2) If emergency flotation devices are installed, there shall be an emergency exit accessible to each passenger on each side of the cabin that is shown by test, demonstration, or analysis to:
 - (i) Be above the waterline; and
 - (ii) Be open without interference from flotation devices, whether stowed or deployed.
- (c) TYPE AND OPERATION. Each emergency exit prescribed by paragraph 9.1.2(a) of this subsection shall:
 - (1) Consist of a movable window or panel, or an additional external door, providing an unobstructed opening that will admit a 48 cm (19 in) by 66 cm (26 in) ellipse;
 - (2) Have simple and obvious methods of opening, from the inside and from the outside, that do not require exceptional effort;
 - (3) Be arranged and marked so as to be readily located and opened even in darkness; and
 - (4) Be reasonably protected from jamming by fuselage deformation.
- (d) DITCHING EMERGENCY EXITS FOR PASSENGERS. If certification with ditching provisions is requested, the markings required by paragraph 9.1.2(c)(3) of this subsection shall be designed to remain visible if the helicopter is capsized and the cabin is submerged.

(e) No person shall operate a helicopter certificated with a maximum certificated take-off mass of over 9 071 kg (20 000 lbs) and 10 or more passenger seats without the following emergency exit equipment:

(1) PASSENGER EMERGENCY EXITS AND OPENINGS. Openings with dimensions larger than those specified below may be used, regardless of shape, if the base of the opening has a flat surface of not less than the specified width. For the purpose of this Part, the types of passenger emergency exit shall be as follows:

(i) TYPE I. This type shall have a rectangular opening of not less than 61 cm (24 in) wide by 122 cm (48 in) high, with corner radii not greater than one-third the width of the exit, in the passenger area in the side of the fuselage at floor level and as far away as practicable from areas that might become potential fire hazards in a crash.

(ii) TYPE II. This type is the same as Type I, except that the opening shall be at least 51 cm (20 in) wide by 112 cm (44 in) high.

(iii) TYPE III. This type is the same as Type I, except that:

(A) The opening shall be at least 51 cm (20 in) wide by 91 cm (36 in) high; and

(B) The exits need not be at floor level.

(iv) TYPE IV. This type shall have a rectangular opening of not less than 48 cm (19 in) wide by 66 cm (26 in) high, with corner radii not greater than one-third the width of the exit, in the side of the fuselage with a step-up inside the rotorcraft of not more than 74 cm (29 in).

(2) PASSENGER EMERGENCY EXITS – SIDE-OF-FUSELAGE. Emergency exits shall be accessible to the passengers and, except as provided in paragraph 9.1.2(e)(4) of this subsection, shall be provided in accordance with the following table: Emergency exits for each side of the fuselage.

Passenger Seating Capacity	Emergency Exits for Each Side of the Fuselage			
	Type I	Type II	Type III	Type IV
1 through 10				1
11 through 19			1 or	2
20 through 39		1		1
40 through 59	1			1
60 through 79	1		1 or	2

(3) PASSENGER EMERGENCY EXITS – OTHER THAN SIDE-OF-FUSELAGE. In addition to the requirements of paragraph 9.1.2(e)(2) of this subsection:

(i) There shall be enough openings in the top, bottom, or ends of the fuselage to allow evacuation with the rotorcraft on its side; or

(ii) The probability of the rotorcraft coming to rest on its side in a crash landing shall be extremely remote.

- (4) **DITCHING EMERGENCY EXITS FOR PASSENGERS.** If the helicopter was certificated with ditching provisions, ditching emergency exits shall be provided in accordance with the following:
- (i) For rotorcraft that have a passenger seating configuration, excluding pilot seats, of 9 seats or less, 1 exit above the waterline in each side of the rotorcraft, meeting at least the dimensions of a Type IV exit.
 - (ii) For rotorcraft that have a passenger seating configuration, excluding pilot seats, of 10 seats or more, 1 exit above the waterline in a side of the rotorcraft meeting at least the dimensions of a Type III exit, for each unit (or part of a unit) of 35 passenger seats, but no less than 2 such exits in the passenger cabin, with 1 on each side of the rotorcraft. However, where it has been shown through analysis, ditching demonstrations, or any other tests found necessary, that the evacuation capability of the rotorcraft during ditching is improved by the use of larger exits, or by other means, the passenger seat-to-exit ratio may be increased.
 - (iii) Flotation devices, whether stowed or deployed, may not interfere with or obstruct the exits.
- (5) **RAMP EXITS.** One Type I exit only, or one Type II exit only, that is required in the side of the fuselage under paragraph 9.1.2(e)(2) of this subsection, may be installed instead in the ramp of floor ramp rotorcraft if:
- (i) Its installation in the side of the fuselage is impractical; and
 - (ii) Its installation in the ramp meets emergency exit access requirements in paragraph 9.1.2(e)(4) of this subsection.
- (6) **EMERGENCY EXIT ARRANGEMENT.**
- (i) Each emergency exit shall consist of a movable door or hatch in the external walls of the fuselage and shall provide an unobstructed opening to the outside.
 - (ii) Each emergency exit shall be openable from the inside and from the outside.
 - (iii) The means of opening each emergency exit shall be simple and obvious and shall not require exceptional effort.
 - (iv) There shall be means for locking each emergency exit and for preventing opening in flight inadvertently or as a result of mechanical failure.
 - (v) There shall be means to minimise the probability of the jamming of any emergency exit in a minor crash landing as a result of fuselage deformation under the ultimate inertial forces:
 - (A) Upward – 1.5g
 - (B) Forward – 4.0g
 - (C) Sideward – 2.0g
 - (D) Downward – 4.0g
- (7) Except as provided in paragraph 9.1.2(e)(9) of this subsection, each land-based rotorcraft emergency exit shall have an approved slide as stated in paragraph 9.1.2(e)(8) of this subsection, or its equivalent, to assist occupants in descending to the ground from each floor-level exit, and an approved rope, or its equivalent, for all other exits, if the exit threshold is more than 1.8 m (6 ft) above the ground:

- (i) With the rotorcraft on the ground and with the landing gear extended;
 - (ii) With one or more legs or part of the landing gear collapsed, broken, or not extended; and
 - (iii) With the rotorcraft resting on its side, provided this was accomplished during the emergency evacuation test during type certification of the helicopter.
- (8) The slide for each passenger emergency exit shall be a self-supporting slide or equivalent, and shall be designed to meet the following requirements:
- (i) It shall be automatically deployed, and deployment shall begin during the interval between the time the exit opening means is actuated from inside the rotorcraft and the time the exit is fully opened. However, each passenger emergency exit that is also a passenger entrance door or a service door shall be provided with means to prevent deployment of the slide when the exit is opened from either the inside or the outside under non-emergency conditions for normal use.
 - (ii) It shall be automatically erected within 10 seconds after deployment is begun.
 - (iii) It shall be of such length after full deployment that the lower end is self-supporting on the ground and provides safe evacuation of occupants to the ground after collapse of one or more legs or part of the landing gear.
 - (iv) It shall have the capability, in 25-knot winds directed from the most critical angle, to deploy and, with the assistance of only one person, to remain usable after full deployment to evacuate occupants safely to the ground.
- (9) For helicopters having 30 or fewer passenger seats and having an exit threshold more than 1.8 m (6 ft) above the ground, a rope or other assist means may be used in place of the slide specified in paragraph 9.1.2(e)(7) of this subsection, provided this was accomplished during the emergency evacuation test during type certification of the helicopter.
- (10) If a rope, with its attachment, is used for compliance with paragraphs 9.1.2(e)(7), (8), or (9) of this subsection, it shall:
- (i) Withstand a 181-kg (400-lb) static load; and
 - (ii) Attach to the fuselage structure at or above the top of the emergency exit opening, or at another approved location if the stowed rope may reduce the pilot's view in-flight.
- (11) **EMERGENCY EXIT MARKING.**
- (i) Each passenger emergency exit, its means of access, and its means of opening shall be conspicuously marked for the guidance of occupants using the exits in daylight or in the dark. Such markings shall be designed to remain visible for rotorcraft equipped for overwater flights if the rotorcraft is capsized and the cabin is submerged.
 - (ii) The identity and location of each passenger emergency exit shall be recognizable from a distance equal to the width of the cabin.
 - (iii) The location of each passenger emergency exit shall be indicated by a sign visible to occupants approaching along the main passenger aisle. There shall be a locating sign:
 - (A) Next to or above the aisle near each floor emergency exit, except that one sign may serve two exits if both exits can be seen readily from that sign; and

- (B) On each bulkhead or divider that prevents fore and aft vision along the passenger cabin, to indicate emergency exits beyond and obscured by it, except that if this is not possible, the sign may be placed at another appropriate location.
- (iv) Each passenger emergency exit marking and each locating sign shall have white letters 2.5 cm (1 in) high on a red background 5 cm (2 in) high, shall be self or electrically illuminated, and shall have a minimum luminescence (brightness) of at least 160 micro lamberts. The colours may be reversed if this will increase the emergency illumination of the passenger compartment.
- (v) The location of each passenger emergency exit operating handle and instructions for opening shall be shown:
 - (A) For each emergency exit, by a marking on or near the exit that is readable from a distance of 76 cm (30 in); and
 - (B) For each Type I or Type II emergency exit with a locking mechanism released by rotary motion of the handle, by:
 1. A red arrow, with a shaft at least three-fourths of an inch wide and a head twice the width of the shaft, extending along at least 70 degrees of arc at a radius approximately equal to three-fourths of the handle length; and
 2. The word “open” in red letters 2.5 cm (1 in) high, placed horizontally near the head of the arrow.
- (12) Each emergency exit, and its means of opening, shall be marked on the outside of the rotorcraft. In addition, the following apply:
 - (i) There shall be a 2-inch coloured band outlining each passenger emergency exit, except small rotorcraft with a maximum certificated take-off mass of 5 700 kg (12 500 lbs) or less may have a 5-cm (2-in) coloured band outlining each exit release lever or device of passenger emergency exits that are normally used doors.
 - (ii) Each outside marking, including the band, shall have colour contrast to be readily distinguishable from the surrounding fuselage surface. The contrast shall be such that, if the reflectance of the darker colour is 15 per cent or less, the reflectance of the lighter colour shall be at least 45 per cent. “Reflectance” is the ratio of the luminous flux reflected by a body to the luminous flux it receives. When the reflectance of the darker colour is greater than 15 per cent, at least a 30 per cent difference between its reflectance and the reflectance of the lighter colour shall be provided.
- (13) **EMERGENCY LIGHTING.** The following apply:
 - (i) A source of light with its power supply independent of the main lighting system shall be installed to:
 - (A) Illuminate each passenger emergency exit marking and locating sign; and
 - (B) Provide enough general lighting in the passenger cabin so that the average illumination, when measured at 102-cm (40-in) intervals at seat armrest height on the centerline of the main passenger aisle, is at least 0.05 foot-candle.
 - (ii) Exterior emergency lighting shall be provided at each emergency exit. The illumination may not be less than 0.05 foot-candle (measured normal to the direction of incident light) for minimum width on the ground surface, with landing gear

extended, equal to the width of the emergency exit where an evacuee is likely to make first contact with the ground outside the cabin. The exterior emergency lighting may be provided by either interior or exterior sources with light intensity measurements made with the emergency exits open.

- (iii) Each light required by paragraph 9.1.2(e)(13)(i) or (ii) of this subsection shall be operable manually from the flight deck and from a point in the passenger compartment that is readily accessible. The flight deck control device shall have an “on,” “off,” and “armed” position so that when turned on at the flight deck or passenger compartment or when armed at the flight deck, the emergency lights will either illuminate or remain illuminated upon interruption of the rotorcraft’s normal electric power.
 - (iv) Any means required to assist the occupants in descending to the ground shall be illuminated so that the erected assist means is visible from the rotorcraft.
 - (A) The assist means shall be provided with an illumination of not less than 0.03 foot-candle (measured normal to the direction of the incident light) at the ground end of the erected assist means where an evacuee using the established escape route may normally make first contact with the ground, with the rotorcraft in each of the attitudes corresponding to the collapse of one or more legs of the landing gear.
 - (B) If the emergency lighting subsystem illuminating the assist means is independent of the rotorcraft’s main emergency lighting system, it will:
 - 1. Automatically be activated when the assist means is erected;
 - 2. Provide the illumination required by paragraph 9.1.2(e)(13)(iv)(A) of this subsection; and
 - 3. Not be adversely affected by stowage.
 - (v) The energy supply to each emergency lighting unit shall provide the required level of illumination for at least 10 minutes at the critical ambient conditions after an emergency landing.
 - (vi) If storage batteries are used as the energy supply for the emergency lighting system, they may be recharged from the rotorcraft’s main electrical power system provided the charging circuit is designed to preclude inadvertent battery discharge into charging circuit faults.
- (14) EMERGENCY EXIT ACCESS.
- (i) Each passageway between passenger compartments, and each passageway leading to Type I and Type II emergency exits, shall be:
 - (A) Unobstructed; and
 - (B) At least 51 cm (20) in wide.
 - (ii) For each emergency exit covered by paragraph 9.1.2(e)(7) of this subsection, there shall be enough space adjacent to that exit to allow a crew member to assist in the evacuation of passengers without reducing the unobstructed width of the passageway below that required for that exit.
 - (iii) There shall be access from each aisle to each Type III and Type IV exit, and:
 - (A) For rotorcraft that have a passenger seating configuration, excluding pilot seats, of 20 or more, the projected opening of the exit provided shall not be obstructed

by seats, berths, or other protrusions (including seatbacks in any position) for a distance from that exit of not less than the width of the narrowest passenger seat installed on the rotorcraft; and

- (B) For rotorcraft that have a passenger seating configuration, excluding pilot seats, of 19 or less, there may be minor obstructions in the region described in paragraph 9.1.2(e)(14)(iii)(C) of this subsection, if there are compensating factors to maintain the effectiveness of the exit.

(15) MAIN ISLE WIDTH. The main passenger aisle width between seats shall equal or exceed the values in the following table:

Passenger Seating Capacity	Minimum Main Passenger Aisle Width	
	Less Than 64 cm (25 in) From Floor (inches)	64 cm (25 in) and More From Floor (inches)
10 or less	30 cm (12 in)	38 cm (15 in)
11 through 19	30 cm (12 in)	51 cm (20 in)
20 or more	38 cm (15 in)	51 cm (20 in)

9.3 Visual Signalling Devices

- (a) [AAC] No person may operate an aircraft over water, or across land areas that have been designated by Sierra Leone as areas in which search and rescue may be especially difficult, unless equipped with such signalling devices as may be appropriate to the area overflown, to include:
- (1) At least one pyrotechnic signalling device for each life raft required for overwater operations; and
 - (2) Any other requirements specified by Sierra Leone.

9.4 Survival Kits

- (a) [AAC] No person may operate an aircraft across land areas that have been designated by Sierra Leone as areas in which search and rescue may be especially difficult, unless it is equipped with enough of the survival kits specified in 9.1.18(d)(2) of this Part for the number of occupants of the aeroplane or helicopter appropriate for the route to be flown.
- (b) [AAC] No person may operate an aircraft over water as specified in 9.1.18(a) of this Part unless it is equipped with enough of the survival kits specified in 9.1.18(d)(2) of this Part for the number of occupants of the aeroplane or helicopter.

9.5 Emergency Locator Transmitter

- (a) No person shall operate an aeroplane without the following emergency locator equipment:
- (1) [AAC] All aeroplanes on all flights shall be equipped with an automatically activated ELT that transmits simultaneously on both 406 MHz and 121.5 MHz and meets the technical standards specified by the Authority and the relevant portions of SLCARs Part 10C.
 - (2) [AAC] All aeroplanes authorised to carry more than 19 passengers shall be equipped with at least 1 automatic ELT or 2 ELTs of any type.

- (3) [AAC] All aeroplanes authorised to carry more than 19 passengers, for which the individual certificate of airworthiness is first issued after 01 July 2008, shall be equipped with:
 - (i) At least two ELTs, one of which shall be automatic; or
 - (ii) At least one ELT and a capability that meets the requirements of 7.1.9 of this Part unless some other means of compliance of aircraft distress tracking has been used.
- (4) [AOC] No person may operate an aeroplane in long-range overwater operations, or over designated land areas where search and rescue may be especially difficult, without having on the aeroplane at least two ELTs, one of which shall be automatic.
- (5) [AOC] At least one survival-type ELT shall be located with each life raft carried. (Section 9.1.18 of this Part has additional requirements for life rafts.)
- (b) No person shall operate a helicopter without the following emergency locator equipment:
 - (1) [AAC] All helicopters on all flights shall be equipped with an automatically activated ELT that transmits simultaneously on both 406 MHz and 121.5 MHz and meets the technical standards specified by the Authority and the relevant portions of SLCARs Part 10C.
 - (2) [AAC] All helicopters operating on flights over water, or in a hostile environment designated as a land area where search and rescue may be especially difficult, shall be equipped with at least one automatic ELT and one ELT(S) in each life raft carried on board. (Section 9.1.18 of this Part has additional requirements for life rafts.)
- (c) The date for a replacement of the battery in the ELT shall be legibly marked on the outside of the transmitter.
- (d) [AAC] Batteries used in ELTs shall be replaced (or recharged if the battery is rechargeable) when:
 - (1) The transmitter has been in use for more than 1 cumulative hour; or Fifty per cent of their useful life (or, for rechargeable batteries, 50 per cent of their useful life of charge) has expired.

9.6 Portable Fire Extinguishers

- (a) [AAC] No person may operate an aircraft unless the aircraft is equipped with portable fire extinguishers of a type that, when discharged, will not cause dangerous contamination of the air within the aircraft. At least one portable fire extinguisher shall be located in:
 - (1) The pilot's compartment; and
 - (2) Each passenger compartment that is separate from the pilot's compartment and not readily accessible to the flight crew.
- (b) [AOC] No person may operate an aircraft unless the aircraft is equipped with portable fire extinguishers accessible for use in crew, passenger, and cargo compartments as follows:
 - (1) The type and quantity of extinguishing agent shall be suitable for the kinds of fires likely to occur in the compartment where the extinguisher is intended to be used.
 - (2) At least one portable fire extinguisher shall be provided and conveniently located for use in each Class E cargo compartment that is accessible to crew members during flight, and at least one portable fire extinguisher shall be located in each upper and lower lobe galley.

- (3) At least one portable fire extinguisher shall be conveniently located on the flight deck for use by the flight crew.
- (4) At least one portable fire extinguisher shall be conveniently located in the passenger compartment if the passenger compartment is separate from the flight deck and not readily accessible to the flight crew.
- (5) For each aeroplane having a passenger seating capacity of more than 30, there shall be at least the following number of portable fire extinguishers conveniently located and uniformly distributed throughout the compartment:

Minimum Number of Hand Fire Extinguishers Passenger Seating Capacity	
7 through 29	1
30 through 60	2
61 through 200	3
201 through 300	4
301 through 400	5
401 through 500	6
501 through 600	7
601 and more	8

- (c) [AAC] Any agent used in a portable fire extinguisher in an aircraft for which the individual certificate of airworthiness is first issued on or after 31 December 2011, and any extinguishing agent used in a portable fire extinguisher in an aircraft for which the individual certificate of airworthiness is first issued on or after 31 December 2018, shall:
- (1) Meet the applicable minimum performance requirements of the Authority; and
 - (2) Not contain Halon 1211, Halon 1301, or Halon 2402.

9.7 Lavatory Fire Extinguisher

- (a) [AAC] No person may operate an aircraft unless each lavatory in the aircraft is equipped with a built-in fire extinguisher for each disposal receptacle for towels, paper, or waste located within the lavatory.
- (b) [AAC] Built-in lavatory fire extinguishers shall be designed to discharge automatically into each disposal receptacle upon occurrence of a fire in the receptacle.
- (c) [AAC] Any agent used in a built-in fire extinguisher for each lavatory disposal receptacle for towels or waste in an aircraft for which the individual certificate of airworthiness is first issued on or after 31 December 2011 shall:
 - (1) Meet the applicable minimum performance requirements of the Authority; and
 - (2) Not contain Halon 1211, Halon 1301, or Halon 2402.

9.8 Lavatory Smoke Detector

- (a) [AOC] No person may operate a passenger-carrying aeroplane unless each lavatory in the aeroplane is equipped with a smoke detector system or equivalent that provides:
 - (1) A warning light on the flight deck; or


- (2) A warning light or audio warning in the passenger cabin that shall be readily detected by a cabin crew member, taking into consideration the positioning of cabin crew members throughout the passenger compartment during various phases of flight.

9.9 Crash Axe

- (a) [AAC] No person shall operate an aeroplane of a maximum certificated take-off mass of over 5 700 kg unless the aeroplane is equipped with a crash axe appropriate for effective use in that type of aeroplane, stored in a place not visible to passengers on the aeroplane.

9.10 Marking of Break-In Points

- (a) [AAC] If areas of the fuselage suitable for break-in by rescue crews in an emergency are marked on an aeroplane, such areas shall be marked as shown below, and the colour of the markings shall be red or yellow and, if necessary, they shall be outlined in white to contrast with the background.

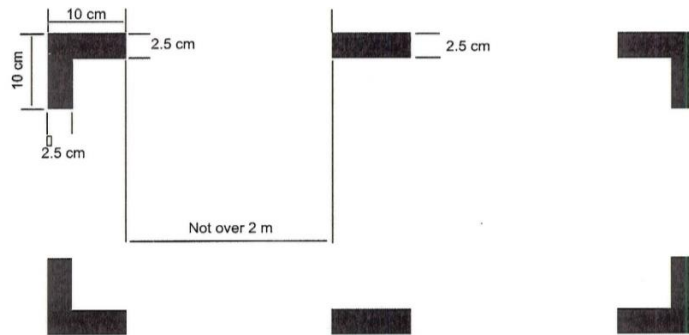

- (b) If the corner markings are more than 2 m (6.5 ft) apart, intermediate lines 9 cm (3.5 in) x 3 cm (1.2 in) shall be inserted so that there is no more than 2 m (6.5 ft) between adjacent markings.

9.11 First Aid Kits and Universal Precaution Kits

- (a) FIRST AID KITS.

- (1) No person may operate an aircraft unless the aircraft is equipped with an accessible, approved first aid kit(s) and the contents of the first aid kit(s) comply with the requirements prescribed in IS 9.1.11.
- (2) The contents of first aid kits to be carried shall comply with the requirements prescribed in IS 9.1.11.
- (3) Each aircraft shall carry first aid kits in accordance with at least the following schedule:

Number of Passenger Seats	Number of First Aid Kits
0-100	1
101-200	2
201-300	3
301-400	4
401-500	5
More than 500	6

- (4) The location of first aid kits shall be:
- (i) Distributed evenly throughout the aircraft;
 - (ii) Readily accessible to cabin crew members, if cabin crew members are required for flight; and
 - (iii) Located near the aircraft exits, should their use be required outside the aircraft in an emergency situation.
- (b) UNIVERSAL PRECAUTION KIT.
- (1) No person shall operate an aircraft that requires a cabin crew member unless the aircraft is equipped with at least one universal precaution kit.
 - (2) The contents of universal precaution kits to be carried shall comply with the requirements prescribed in IS 9.1.11.
 - (3) Each aircraft shall carry universal precaution kits in accordance with the following:
 - (i) Two kits; and
 - (ii) Additional kits, as determined by the Authority, at times of increased public health risk, such as during an outbreak of a serious communicable disease having pandemic potential.

9.12 Emergency Medical Kit – Aeroplanes

- (a) [AOC] No person may operate a passenger flight in an aeroplane with 30 seats or more unless the aeroplane is equipped with an approved emergency medical kit for treatment of injuries or medical emergencies that might occur during flight time or in minor accidents.
- (b) [AOC] The contents of emergency medical kits to be carried shall comply with the requirements prescribed in IS 9.1.12.
- (c) [AOC] The medical kit shall be stored in a secure location.

9.13 Oxygen Storage and Dispensing Apparatus

- (a) [AAC] All aircraft intended to be operated at altitudes requiring the use of supplemental oxygen shall be equipped with adequate oxygen storage and dispensing apparatus.
- (b) [AAC] The oxygen apparatus, the minimum rate of oxygen flow, and the supply of oxygen shall meet applicable airworthiness standards for type certification in the transport category as specified by the Authority.

- (c) [AAC] No person may operate an aircraft at altitudes above 3 000 m (10 000 ft) unless the aircraft is equipped with oxygen masks, located so as to be within the immediate reach of flight crew members while at their assigned duty station.
- (d) [AAC] No person may operate a pressurised aeroplane at altitudes above 7 600 m (25 000 ft) unless:
 - (1) Flight crew member oxygen masks are available at the flight duty station and are of a quick donning type;
 - (2) Sufficient spare outlets and masks and/or sufficient portable oxygen units with masks are distributed evenly throughout the cabin to ensure immediate availability of oxygen to each required cabin crew member regardless of his location at the time of cabin pressurisation failure.
- (e) [AAC] An oxygen-dispensing unit connected to oxygen supply terminals shall be installed so as to be immediately available to each occupant, wherever seated. The total number of dispensing units and outlets shall exceed the number of seats by at least 10 per cent. The extra units are to be evenly distributed throughout the cabin.
- (f) [AAC] The amount of supplemental oxygen for sustenance required for a particular operation shall be determined on the basis of flight altitudes and flight duration, consistent with the operating procedures established for each operation in the OM and with the routes to be flown, and with the emergency procedures specified in the OM.
- (g) [AAC] The process to determine the amount of supplemental oxygen needed for non-pressurised and pressurised aircraft is contained in IS 9.1.13.

9.14 Protective Breathing Equipment

- (a) [AOC] No AOC holder may operate an aeroplane with a maximum certificated take-off mass of over 5 700 kg or having a maximum approved seating configuration of more than 19 seats unless the aeroplane has:
 - (1) PBE to protect the eyes, nose, and mouth of each flight crew member while on flight deck duty and to provide oxygen for a period of not less than 15 minutes; and
 - (2) Sufficient portable PBE to protect the eyes, nose, and mouth of all required cabin crew members and to provide breathing gas for a period of not less than 15 minutes.
- (b) [AOC] The oxygen supply for PBE may be provided by the required supplemental oxygen system.
- (c) [AOC] The PBE intended for flight crew use shall be conveniently located on the flight deck and shall be easily accessible for immediate use by each required flight crew member at their assigned duty station.
- (d) [AOC] The PBE intended for cabin crew use shall be installed adjacent to each required cabin crew member duty station.
- (e) [AOC] Easily accessible portable PBE shall be provided and located at or adjacent to the required hand fire extinguishers except that, where the fire extinguisher is located inside a cargo compartment, the PBE shall be stowed outside but adjacent to the entrance to that compartment.
- (f) [AOC] The PBE while in use shall not prevent required communication.

9.15 First Aid Oxygen Dispensing Units

- (a) [AOC] No AOC holder may conduct a passenger-carrying operation in a pressurised aeroplane at altitudes above 7 600 m (25 000 ft), when a cabin crew member is required to be carried, unless the aeroplane is equipped with:
 - (1) Undiluted first aid oxygen for passengers who, for physiological reasons, may require oxygen following a cabin depressurisation; and
 - (2) A sufficient number of dispensing units, but in no case less than two, with a means for cabin crew to use the supply.
- (b) [AOC] The amount of first aid oxygen required in paragraph 9.1.15(a) of this subsection for a particular operation and route shall be determined on the basis of:
 - (1) Flight duration after cabin depressurisation at cabin altitudes of more than 2 438 m (8 000 ft);
 - (2) An average flow rate of at least 3 litres STPD/minute/person; and
 - (3) At least 2 per cent of the passengers carried, but in no case for less than one person.
- (c) The amount of first aid oxygen required for a particular operation shall be determined on the basis of cabin pressure altitudes and flight duration, consistent with the operating procedures established for each operation and route.
- (d) The oxygen equipment provided shall be capable of generating a mass flow to each user of at least 4 litres per minute, STPD. Means may be provided to decrease the flow to not less than 2 litres per minute, STPD, at any altitude.

9.16 Megaphones

- (a) [AOC] Each person operating a passenger-carrying aeroplane shall have a portable battery-powered megaphone or megaphones readily accessible to the crew members assigned to direct emergency evacuation.
- (b) [AOC] The number and location of megaphones required in paragraph 9.1.16(a) of this subsection shall be determined as follows:
 - (1) On aeroplanes with a seating capacity of more than 60 and less than 100 passengers, one megaphone shall be located at the most rearward location in the passenger cabin where it would be readily accessible to a normal cabin crew member seat;
 - (2) On aeroplanes with a seating capacity of more than 99 passengers, two megaphones shall be installed in the passenger cabin: one shall be located at the forward end and the other shall be located at the most rearward location where it would be readily accessible to a normal cabin crew member seat; and
 - (3) For aeroplanes with more than one passenger deck, in all cases when the total passenger seating configuration of a deck is more than 60, at least one megaphone is required on the deck.

9.17 Individual Flotation Devices

- (a) LANDPLANES.
 - (1) [AAC] Landplanes shall carry the equipment prescribed in paragraph 9.1.17(a)(2) of this subsection:

- (i) When flying en route over water beyond gliding distance from the shore;
 - (ii) When flying over water at a distance of more than 93 km (50 NM) away from the shore for aircraft capable of maintaining safe altitude after the failure of one engine for two-engine aircraft and the failure of two engines for three- or four-engine aircraft; or
 - (iii) When taking off or landing at an aerodrome where the Authority has determined the take-off or approach path is so disposed over water that in the event of a mishap there would be the likelihood of a ditching.
- (2) [AAC] One life jacket or equivalent flotation device equipped with a means of electric illumination shall be carried for each person on board, stowed in a position easily accessible from the seat or berth of the person for whose use it is provided.
- (b) SEAPLANES.
- (1) [AAC] For all flights, seaplanes shall be equipped with the equipment prescribed in paragraph 9.1.17(a)(2) of this subsection.

9.18 Life Rafts

- (a) [AAC] In addition to the equipment prescribed in 9.1.17 and 9.1.19 of this Part, life rafts in sufficient numbers to carry all persons on board shall be installed in:
- (1) Aeroplanes operated on long range overwater flights;
 - (2) All other aeroplanes when they are operated over water away from land suitable for making an emergency landing at a distance of more than 185 km (100 NM) in the case of single-engine aeroplanes, and more than 370 km (200 NM) in the case of multi-engine aeroplanes capable of continuing flight with one engine inoperative;
 - (3) Class 1 and Class 2 helicopters when they are operated over water at a distance from land corresponding to more than 10 minutes at normal cruise speed; and
 - (4) Class 3 helicopters when they are operated over water beyond autorotational or safe forced landing distance from land.
- (b) [AOC] An aircraft shall have life rafts with a sufficient capacity to carry all persons on board in the event of the loss of one raft of the largest capacity.
- (c) All life rafts shall be stowed so as to facilitate their ready use in an emergency.
- (d) Life rafts shall be equipped with the following life-sustaining equipment:
- (1) An electric survivor locator light;
 - (2) A survival kit;
 - (3) A pyrotechnic signalling device; and
 - (4) An ELT. (Section 9.1.5 of this Part provides additional requirements for first aid oxygen dispensing units.)
- (e) [AOC] In helicopters, life rafts that are not deployable by remote control and that have a mass of more than 40 kg shall be equipped with a means of mechanically assisted deployment.

9.19 Flotation Device for Helicopter Ditching

[AAC] All helicopters flying over water at a distance from land corresponding to more than 10 minutes at normal cruise speed in the case of performance Class 1 or Class 2 helicopters, or flying over water beyond autorotational or safe forced landing distance from land in the case of performance Class 3 helicopters, shall be fitted with a permanent or rapidly deployable means of floatation so as to ensure a safe ditching of the helicopter.

10 MISCELLANEOUS SYSTEMS AND EQUIPMENT

10.1 Seats, Safety Belts, and Shoulder Harnesses

- (a) [AAC] Each aircraft used in passenger-carrying operations shall be equipped with the following seats, safety belts, and shoulder harnesses that meet the airworthiness requirements for type certification of that aircraft:
- (1) A seat with safety belt for each person on board over an age to be determined by Sierra Leone; and a restraining belt for each berth on board the aircraft.
 - (2) A safety harness for each flight crew member seat.
 - (i) The safety harness for each pilot seat shall incorporate a device that will automatically restrain the occupant's torso in the event of rapid deceleration.
 - (ii) The safety harness for each pilot seat, which includes shoulder straps and a seat belt, shall incorporate a restraining device to prevent a suddenly incapacitated pilot from interfering with the flight controls.
 - (3) A forward or rearward facing (within 15 degrees of the longitudinal axis of the aeroplane) seat equipped with a safety harness for each cabin crew member station in the passenger compartment.
 - (4) The cabin crew member seats shall be located near floor level and other emergency exits as required by the Authority for emergency evacuation.

10.2 Passenger and Pilot Compartment Doors – Aeroplanes

- (a) [AOC] PILOT COMPARTMENT DOOR.
- (1) No person may operate a passenger-carrying aeroplane of a maximum certificated take-off mass of over 45 500 kg (100 310 lbs) or with a passenger seating capacity greater than 60 unless that aircraft is equipped with an approved flight crew compartment door that is designed to resist penetration by small arms fire and grenade shrapnel, and to resist forcible intrusions by unauthorised persons.
 - (2) No person may operate a passenger-carrying aeroplane having a certificated take-off mass of less than 45 500 kg (100 310 lbs) or with a passenger seating capacity of less than 60 unless that aircraft is equipped with an approved flight crew compartment door, where practicable, that is designed to resist penetration by small arms fire and grenade shrapnel, and to resist forcible intrusions by unauthorised persons.
 - (3) Each pilot compartment door shall be capable of being locked and unlocked from either pilot station.
 - (4) A means shall be provided for monitoring from either pilot station the entire door area outside the pilot compartment to identify persons requesting entry and to detect suspicious behaviour or potential threat.

(b) [AOC] PASSENGER COMPARTMENT DOORS.

(1) Each passenger compartment door shall have:

- (i) A means for the crew, in an emergency, to unlock each door that leads to a compartment that is normally accessible to passengers and that can be locked by passengers;
- (ii) A placard on each door used to access a required passenger emergency exit, indicating that such door shall be open during take-off and landing; and
- (iii) A means readily available for each crew member to unlock any door that separates a passenger compartment from another compartment that has emergency exit provisions.

10.3 Passenger Information Signs

(a) [AOC] No person shall operate a passenger-carrying aeroplane with a maximum certificated take-off mass of 5 700 kg (12 500 lbs) or more unless the aeroplane is equipped with:

(1) At least one passenger information sign (using either letters or symbols) notifying when smoking is prohibited and one sign (using either letters or symbols) notifying when safety belts shall be fastened, and which shall, when illuminated, be legible to each person seated in the passenger cabin under all probable conditions of cabin illumination;

- (i) Signs that notify when safety belts shall be fastened and when smoking is prohibited shall be so constructed that the crew can turn them on and off; and

(2) A sign or placard affixed to each forward bulkhead and each passenger seat back that reads “Fasten Seat Belt While Seated.”

(b) [AAC] Notwithstanding paragraph 10.1.3(a) of this subsection, no person shall operate an aircraft in which all passenger seats are not visible from the flight deck, unless the aircraft is equipped with a means of indicating to all passengers and cabin crew when seat belts shall be fastened and when smoking is not allowed.

10.4 Materials for Cabin Interiors

(a) No person shall operate an aircraft unless each compartment used by the crew or passengers meets the following requirements of the State of Design:

- (1) Materials shall be at least flash resistant;
- (2) The wall and ceiling linings and the covering of upholstering, floors, and furnishings shall be flame resistant;
- (3) Each compartment where smoking is to be allowed shall be equipped with self-contained ash trays that are completely removable, and other compartments shall be placarded against smoking; and
- (4) Each receptacle for used towels, papers, and wastes shall be of fire-resistant material and shall have a cover or other means of containing possible fires started in the receptacles.

(b) For aircraft for which the State of Design has developed new airworthiness requirements for cabin interiors since original type certification, the owner of the aircraft shall ensure that all materials that do not meet current State of Design requirements shall have them replaced upon the first major overhaul of the aircraft cabin or refurbishing of the cabin interior with materials that meet the new requirements.

10.5 Materials for Cargo and Baggage Compartments

[AAC] Each cargo compartment shall have ceiling and sidewall liner panels that are constructed of materials that meet the test requirements for flame resistance of cargo compartment liners as prescribed for type certification.

10.6 Power Supply, Distribution, and Indication System

- (a) [AOC] No AOC holder may operate an aeroplane unless the aeroplane is equipped with:
- (1) A power supply and distribution system that meets the airworthiness requirements for certification of an aeroplane in the transport category, as specified by the Authority; or
 - (2) A power supply and distribution system that is able to produce and distribute the load for the required instruments and equipment, with the use of an auxiliary power supply if any one power source or component of the power distribution system fails; and
 - (3) A means for indicating the adequacy of the power being supplied to required flight instruments.
- (b) [AOC] Engine-driven sources of energy, when used, shall be redundant.

10.7 Protective Circuit Fuses

[AOC] No person may operate an aeroplane in which protective fuses are installed unless there are spare fuses available of appropriate ratings for replacement of those accessible in flight.

10.8 Icing Protection Equipment

- (a) [AAC] No person may operate an aircraft in expected or actual icing conditions unless the aircraft is equipped for the prevention or removal of ice on windshields, wings, control surfaces, empennage, propellers, rotor blades, or other parts of the aircraft where ice formation will adversely affect the safety of the aircraft.
- (b) [AAC] No person may operate an aircraft in expected or actual icing conditions at night unless the aircraft is equipped with a means to illuminate or detect the formation of ice. Any illumination that is used shall be of a type that will not cause glare or reflection that may handicap crew members in the performance of their duties.

10.9 Pitot Heat and Indication Systems

- (a) [AAC] No person may operate an aircraft in instrument flight conditions unless the aircraft is equipped with a pitot heat system.
- (b) [AOC] No AOC holder may operate an aeroplane equipped with a flight instrument pitot heating system unless the aeroplane is also equipped with an operable pitot heat indication system that complies with the following requirements:
- (1) The indication provided shall incorporate an amber light that is in clear view of a flight crew member. The indication provided shall be designed to alert the flight crew if either:
 - (2) The pitot heating system is switched “off”; and
 - (3) The pitot heating system is switched “on” and any pitot tube heating element is inoperative; or
 - (4) An integrated flight crew alerting system that will notify the crew if the pitot system is malfunctioning.

10.10 Static Pressure System

- (a) [AAC] No person may operate an aircraft unless the aircraft is equipped with a static pressure system vented to the outside atmospheric pressure so that it will be least affected by airflow variation or moisture or other foreign matter, and installed so as to be airtight except for the vent.
- (b) [AAC] No person may operate an aircraft in IFR or VFR at night unless the aircraft is equipped with a static pressure system vented to the outside atmospheric pressure so that it will be least affected by airflow variation or moisture or other foreign matter, and installed so as to be airtight except for the vent, and a means of selecting an alternative source of static pressure.
- (c) [AOC] No person may operate an aircraft unless the aircraft is equipped with two independent static pressure systems vented to the outside atmospheric pressure so that they will be least affected by airflow variation or moisture or other foreign matter and installed so as to be airtight except for the vent.

10.11 Windshield Wipers

[AOC] No AOC holder may operate an aeroplane with a maximum certificated take-off mass of over 5 700 kg unless the aeroplane is equipped at each pilot station with a windshield wiper or equivalent means to maintain a clear portion of the windshield during precipitation.

10.12 Chart Holder

[AOC] No person may operate an aeroplane in commercial air transport operations under single-pilot IFR or at night unless a chart holder is installed in an easily readable position that can be illuminated for night operations.

10.13 Cosmic Radiation Detection Equipment

- (a) [AAC] No person shall operate an aeroplane intended to be operated above 15 000 m (49 000 ft) unless the aeroplane is equipped with:
 - (1) An instrument to measure and indicate continuously the dose rate of total cosmic radiation being received (i.e., the total of ionising and neutron radiation of galactic and solar origin) and the cumulative dose on each flight;
 - (2) A system of on-board quarterly radiation sampling acceptable to the Authority, as prescribed in IS 10.13; and
 - (3) A display unit readily visible to a flight crew member.
- (b) The operator shall have the equipment in paragraph 10.13(a) of this subsection calibrated on the basis of assumptions acceptable to the Authority.

10.14 Maritime Sound Signalling Device

[AAC] All seaplanes for all flights shall be equipped with equipment for making the sound signals prescribed in the International Regulations for Preventing Collisions at Sea, where applicable.

10.15 Anchors

- (a) [AAC] No person shall operate a seaplane unless the seaplane is equipped with:

- (1) One anchor; and
- (2) One sea anchor (drogue).

10.16 All Aeroplanes on Flights over Water

10.16.1 Seaplanes

All seaplanes for all flights shall be equipped with:

- a) one life jacket, or equivalent individual flotation device, for each person on board, stowed in a position easily accessible from the seat or berth of the person for whose use it is provided;
- b) equipment for making the sound signals prescribed in the International Regulations for Preventing Collisions at Sea, where applicable; and
- c) one sea anchor (drogue).

10.16.2 Landplanes

- (a) Landplanes shall carry the equipment prescribed in (b):
 - (i) when flying over water and at a distance of more than 93 km (50 NM) away from the shore, in the case of landplanes operated in accordance with SLCAR Part 6;
 - (ii) when flying en route over water beyond gliding distance from the shore, in the case of all other landplanes; and
 - (iii) when taking off or landing at an aerodrome where, in the opinion of the Authority, the take-off or approach path is so disposed over water that in the event of a mishap there would be a likelihood of a ditching.
- (b) The equipment referred to in (a) shall comprise one life jacket or equivalent individual flotation device for each person on board, stowed in a position easily accessible from the seat or berth of the person for whose use it is provided.

10.16.3 All aeroplanes on long-range over-water flights

- (a) In addition to the equipment prescribed in 10.16.1 or 10.16.2 whichever is applicable, the following equipment shall be installed in all aeroplanes when used over routes on which the aeroplane may be over water and at more than a distance corresponding to 120 minutes at cruising speed or 740 km (400 NM), whichever is the lesser, away from land suitable for making an emergency landing in the case of aircraft operated in accordance with SLCAR Part 6, and 30 minutes or 185 km (100 NM), whichever is the lesser, for all other aeroplanes:
 - (i) life-saving rafts in sufficient numbers to carry all persons on board, stowed so as to facilitate their ready use in emergency, provided with such life-saving equipment including means of sustaining life as is appropriate to the flight to be undertaken;
 - (ii) equipment for making the pyrotechnical distress signals described in SLCAR Part 2; and
 - (iii) at the earliest practicable date, but not later than 1 January 2018, on all aeroplanes of a maximum certificated takeoff mass of over 27 000 kg, a securely attached underwater locating device operating at a frequency of 8.8 kHz. This automatically activated underwater locating device shall operate for a minimum of 30 days and shall not be installed in wings or empennage.
- (b) Each life jacket and equivalent individual flotation device, when carried in accordance with 10.16.1 a), 10.16.2.a) and 10.16.2b), shall be equipped with a means of electric illumination for

the purpose of facilitating the location of persons, except where the requirement of 10.16.1 c) is met by the provision of individual flotation devices other than life jackets.

10.17 All Aeroplanes on Flights over Designated Land Areas

Aeroplanes, when operated across land areas which have been designated by the State concerned as areas in which search and rescue would be especially difficult, shall be equipped with such signaling devices and life-saving equipment (including means of sustaining life) as may be appropriate to the area overflown.

10.18 All Aeroplanes on High Altitude Flights

Approximate altitude in the Standard Atmosphere corresponding to the value of absolute pressure used in this text is as follows:

Absolute pressure	Metres	Feet
700 hPa	3 000	10 000
620 hPa	4 000	13 000
376 hPa	7 600	25 000

- 10.18.1 An aeroplane intended to be operated at flight altitudes at which the atmospheric pressure is less than 700 hPa in personnel compartments shall be equipped with oxygen storage and dispensing apparatus capable of storing and dispensing the oxygen supplies required in SLCAR Part 6.
- 10.18.2 An aeroplane intended to be operated at flight altitudes at which the atmospheric pressure is less than 700 hPa but which is provided with means of maintaining pressures greater than 700 hPa in personnel compartments shall be provided with oxygen storage and dispensing apparatus capable of storing and dispensing the oxygen supplies required in SLCAR Part 6.
- 10.18.3 Pressurized aeroplanes newly introduced into service on or after 1 July 1962 and intended to be operated at flight altitudes at which the atmospheric pressure is less than 376 hPa shall be equipped with a device to provide positive warning to the flight crew of any dangerous loss of pressurization.
- 10.18.4 Pressurized aeroplanes introduced into service before 1 July 1962 and intended to be operated at flight altitudes at which the atmospheric pressure is less than 376 hPa shall be equipped with a device to provide positive warning to the flight crew of any dangerous loss of pressurization.
- 10.18.5 An aeroplane intended to be operated at flight altitudes at which the atmospheric pressure is less than 376 hPa, or which, if operated at flight altitudes at which the atmospheric pressure is more than 376 hPa, cannot descend safely within four minutes to a flight altitude at which the

atmospheric pressure is equal to 620 hPa and for which the individual certificate of airworthiness is first issued on or after 9 November 1998, shall be provided with automatically deployable oxygen equipment to satisfy the requirements of SLCAR Part 6. The total number of oxygen dispensing units shall exceed the number of passenger and cabin crew seats by at least 10 per cent.

10.18.6 An aeroplane intended to be operated at flight altitudes at which the atmospheric pressure is less than 376 hPa, or which, if operated at flight altitudes at which the atmospheric pressure is more than 376 hPa cannot descend safely within four minutes to a flight altitude at which the atmospheric pressure is equal to 620 hPa, and for which the individual certificate of airworthiness was first issued before 9 November 1998, shall be provided with automatically deployable oxygen equipment to satisfy the requirements of SLCAR Part 6. The total number of oxygen dispensing units shall exceed the number of passenger and cabin crew seats by at least 10 per cent.

10.19 All aeroplanes operated above 15 000 m (49 000 ft) — radiation indicator

All aeroplanes intended to be operated above 15 000 m (49 000 ft) shall carry equipment to measure and indicate continuously the dose rate of total cosmic radiation being received (i.e. the total of ionizing and neutron radiation of galactic and solar origin) and the cumulative dose on each flight. The display unit of the equipment shall be readily visible to a flight crew member.

IMPLEMENTING STANDARDS

IS 2.1.7 Category II: Instruments and Equipment Approval and Maintenance Requirements

- (a) GENERAL. The instruments and equipment required by 2.1.7 of this Part shall be approved as provided in this IS before being used in CAT II operations. Before presenting an aircraft for approval of the instruments and equipment, it shall be shown that since the beginning of the 12th calendar month before the date of submission:
- (1) The ILS localiser and glide slope equipment were bench checked according to the manufacturer's instructions and found to meet those standards specified in RTCA Paper 23-63/DO-177 dated 14 March 1963, *Standard Adjustment Criteria for Airborne Localizer and Glideslope Receivers*;
 - (2) The altimeters and the static pressure systems were tested and inspected; and
 - (3) All other instruments and items of equipment specified in 2.1.7 of this Part that are listed in the proposed maintenance programme were bench checked and found to meet the manufacturer's specifications.
- (b) FLIGHT CONTROL GUIDANCE SYSTEM. All components of the flight control guidance system shall be approved as installed by the evaluation programme specified in paragraph (e) of this IS if they have not been approved for CAT III operations under applicable type or supplemental type certification procedures. In addition, subsequent changes to make, model, or design of the components shall be approved under this paragraph. Related systems or devices, such as the autothrottle and computed missed approach guidance system, shall be approved in the same manner if they are to be used for CAT II operations.
- (c) RADIO ALTIMETER. A radio altimeter shall meet the performance criteria of this paragraph for original approval and after each subsequent modification.
- (1) The radio altimeter shall display to the flight crew clearly and positively the wheel height of the main landing gear above the terrain;
 - (2) The radio altimeter shall display wheel height above the terrain to an accuracy of 1.5 m (± 5 ft) or 5 per cent, whichever is greater, under the following conditions:
 - (i) Pitch angles of zero to $\pm 5^\circ$ about the mean approach attitude;
 - (ii) Roll angles of zero to 20° in either direction;
 - (iii) Forward velocities from minimum approach speed up to 200 knots; or
 - (iv) Sink rates from zero to 5 m (15 ft) per second at altitudes from 31 m (100 ft) to 61 m (200 ft).
 - (3) Over level ground, the radio altimeter shall track the actual altitude of the aircraft without significant lag or oscillation;
 - (4) With the aircraft at an altitude of 61 m (200 ft) or less, any abrupt change in terrain representing no more than 10 per cent of the aircraft's altitude shall not cause the altimeter to unlock, and indicator response to such changes shall not exceed 0.1 seconds and, in addition, if the system unlocks for greater changes, it shall reacquire the signal in less than 1 second;
 - (5) Systems that contain a push-to-test feature shall test the entire system (with or without an antenna) at a simulated altitude of less than 152 m (500 ft;) and

- (6) The system shall provide to the flight crew a positive failure warning display any time there is a loss of power or an absence of ground return signals within the designed range of operating altitudes.
- (d) OTHER INSTRUMENTS AND EQUIPMENT. All other instruments and items of equipment required by 2.1.7 of this Part shall be capable of performing as necessary for CAT II operations. Approval is also required after each subsequent modification to these instruments and items of equipment.
- (e) EVALUATION PROGRAMME.
- (f) APPLICATION. Approval by evaluation is requested as a part of the application for approval of the CAT II manual.
- (g) DEMONSTRATIONS. Unless otherwise authorised by the Authority, the evaluation programme for each aircraft requires the demonstrations specified in this paragraph. At least 50 ILS approaches shall be flown with at least 5 approaches on each of 3 different ILS facilities and no more than one-half of the total approaches on any one ILS facility. All approaches shall be flown under simulated instrument conditions to a 30 m (100 ft) DH and 90 per cent of the total approaches made shall be successful. A successful approach is one in which:
- (1) At the 30 m (100 ft) DH, the indicated airspeed and heading are satisfactory for a normal flare and landing (speed shall be ± 5 knots of programmed airspeed, but may not be less than computed threshold speed if autothrottles are used);
 - (2) The aircraft, at the 30 m (100 foot) DH, is positioned so that the flight deck is within, and tracking so as to remain within, the lateral confines of the runway extended;
 - (3) Deviation from glide slope after leaving the outer marker does not exceed 50 per cent of full-scale deflection as displayed on the ILS indicator;
 - (4) No unusual roughness or excessive attitude changes occur after leaving the middle marker; and
 - (5) In the case of an aircraft equipped with an approach coupler, the aircraft is sufficiently in trim when the approach coupler is disconnected at the DH to allow for the continuation of a normal approach and landing.
- (h) RECORDS. During the evaluation programme, the following information shall be maintained by the applicant for the aircraft with respect to each approach and shall be made available to the Authority upon request:
- (1) Each deficiency in airborne instruments and equipment that prevented the initiation of an approach;
 - (2) The reasons for discontinuing an approach, including the altitude above the runway at which it was discontinued;
 - (3) Speed control at the 30 m (100 ft) DH if autothrottles are used;
 - (4) Trim condition of the aircraft upon disconnecting the auto coupler with respect to continuation to flare and landing;
 - (5) Position of the aircraft at the middle marker and at the DH indicated both on a diagram of the basic ILS display and a diagram of the runway extended to the middle marker. Estimated touchdown point shall be indicated on the runway diagram;

- (6) Compatibility of the flight director with the auto coupler, if applicable; and
- (7) Quality of overall system performance.
- (i) EVALUATION. A final evaluation of the flight control guidance system is made upon successful completion of the demonstrations. If no hazardous tendencies have been displayed or are otherwise known to exist, the system is approved as installed.
- (j) Each maintenance programme for CAT II instruments and equipment shall contain the following:
 - (1) A list of each instrument and item of equipment specified in 2.1.7 of this Part that is installed in the aircraft and approved for CAT II operations, including the make and model of those specified in paragraph 2.1.7(a)(1) of this Part;
 - (2) A schedule that provides for the performance of inspections under paragraph (5) of this IS within 3 calendar months after the date of the previous inspection. The inspection shall be performed by a person authorised by Part 5 of these regulations, except that each alternate inspection may be replaced by a functional flight check. This functional flight check shall be performed by a pilot holding a CAT II pilot authorisation for the type aircraft checked;
 - (3) A schedule that provides for the performance of bench checks for each listed instrument and item of equipment that is specified in paragraph 2.1.7(a)(1) of this Part within 12 calendar months after the date of the previous bench check;
 - (4) A schedule that provides for the performance of a test and inspection of each static pressure system within 12 calendar months after the date of the previous test and inspection;
 - (5) The procedures for the performance of the periodic inspections and functional flight checks to determine the ability of each listed instrument and item of equipment specified in paragraph 2.1.7(a)(1) of this Part to perform as approved for CAT II operations, including a procedure for recording functional flight checks;
 - (6) A procedure for assuring that the pilot is informed of all defects in listed instruments and items of equipment;
 - (7) A procedure for assuring that the condition of each listed instrument and item of equipment upon which maintenance is performed is at least equal to its CAT II approval condition before it is returned to service for CAT II operations; and
 - (8) A procedure for an entry in the maintenance records that shows the date, aerodrome, and reasons for each discontinued CAT II operation because of a malfunction of a listed instrument or item of equipment.
- (k) BENCH CHECK. A bench check required by this section shall comply with this paragraph.
 - (1) Except as specified in paragraph (k)(2) of this IS, the bench check shall be performed by a certificated repair station holding one of the following ratings as appropriate to the equipment checked:
 - (i) An instrument rating; or
 - (ii) An avionics rating.
 - (2) The bench check shall be performed by a certificated air operator on aircraft identified in its approved operations specifications with the approved authorisations to perform

maintenance and approve for return to service its own aircraft maintained under a continuing airworthiness maintenance programme under an equivalent system identified in Part 9 of these regulations.

- (3) The bench check shall consist of removal of an instrument or item of equipment and performance of the following:
 - (i) A visual inspection for cleanliness, impending failure, and the need for lubrication, repair, or replacement of parts;
 - (ii) Correction of items found by that visual inspection; and
 - (iii) Calibration to at least the manufacturer's specifications unless otherwise specified in the approved CAT II Manual for the aircraft in which the instrument or item of equipment is installed.
- (l) EXTENSIONS. After the completion of one maintenance cycle of 12 calendar months, a request to extend the period for checks, tests, and inspections is approved if it is shown that the performance of particular equipment justifies the requested extension.

IS 4.1.4 Reduced Vertical Separation Minimum – Altimetry System Performance Requirements for Operations in RVSM Airspace

- (a) With respect to groups of aeroplanes that are nominally of identical design and build with respect to all details that may influence the accuracy of height-keeping performance, the height-keeping performance capability shall be such that the TVE for the group of aeroplanes shall have a mean no greater than 25 m (80 ft) in magnitude and shall have a standard deviation no greater than $28 - 0.013z^2$ for $0 \leq z \leq 25$ when z is the magnitude of the mean TVE in metres, or $92 - 0.004z^2$ for $0 \leq z \leq 80$ where z is in feet. In addition, the components of TVE shall have the following characteristics:
 - (1) The mean ASE of the group shall not exceed 25 m (80 ft) in magnitude;
 - (2) The sum of the absolute value of the mean ASE and of three standard deviations of ASE shall not exceed 75 m (245 ft); and
 - (3) The differences between cleared flight level and the indicated pressure altitude actually flown shall be symmetric about a mean of 0 m, with a standard deviation no greater than 13.3 m (43.7 ft), and, in addition, the decrease in the frequency of differences with increasing difference magnitude shall be at least exponential.
- (b) With respect to aeroplanes for which the characteristics of the airframe and altimetry system fit are unique and so cannot be classified as belonging to a group of aeroplanes encompassed by paragraph (a) of this IS, the height-keeping performance capability shall be such that the components of the TVE of the aeroplane have the following characteristics:
 - (1) The ASE of the aeroplane shall not exceed 60 m (200 ft) in magnitude under all flight conditions; and
 - (2) The differences between the cleared flight level and the indicated pressure altitude actually flown shall be symmetric about a mean of 0 m, with a standard deviation no greater than 13.3 m (43.7 ft), and, in addition, the decrease in the frequency of differences with increasing difference magnitude shall be at least exponential.

IS 7.9 Location of An Aeroplane in Distress

1. Purpose and Scope

Location of an aeroplane in distress aims at establishing, to a reasonable extent, the location of an accident site within a 6 NM radius.

2. OPERATION

2.1 An aeroplane in distress shall automatically activate the transmission of information from which its position can be determined by the operator and the position information shall contain a time stamp. It shall also be possible for this transmission to be activated manually. The system used for the autonomous transmission of position information shall be capable of transmitting that information in the event of aircraft electrical power loss, at least for the expected duration of the entire flight.

2.2 An aircraft is in a distress condition when it is in a state that, if the aircraft behaviour event is left uncorrected, can result in an accident. Autonomous transmission of position information shall be active when an aircraft is in a distress condition. This will provide a high probability of locating an accident site to within a 6 NM radius. The operator shall be alerted when an aircraft is in a distress condition with an acceptable low rate of false alerts. In case of a triggered transmission system, initial transmission of position information shall commence immediately or no later than five seconds after the detection of the activation event.

Note 1. — Aircraft behaviour events can include, but are not limited to, unusual attitudes, unusual speed conditions, collision with terrain and total loss of thrust/propulsion on all engines and ground proximity warnings.

Note 2. — A distress alert can be triggered using criteria that may vary as a result of aircraft position and phase of flight.

Further guidance regarding in-flight event detection and triggering criteria may be found in the EUROCAE ED-237, Minimum Aviation System Performance Specification (MASPS) for Criteria to Detect In-Flight Aircraft Distress Events to Trigger Transmission of Flight Information.

2.3 When an aircraft operator or an air traffic service unit (ATSU) has reason to believe that an aircraft is in distress, coordination shall be established between the ATSU and the aircraft operator.

2.4 The State of the Operator shall identify the organizations that will require the position information of an aircraft in an emergency phase. These shall include, as a minimum:

- a) air traffic service unit(s) (ATSU); and
- b) SAR rescue coordination centre(s) (RCC) and sub-centres.

Note 1.— Refer to SLCAR Part 11 for emergency phase criteria.

Note 2.— Refer to SLCAR Part 12 for required notifications in the event of an emergency phase.

2.5 When autonomous transmission of position information has been activated, it shall only be able to be deactivated using the same mechanism that activated it.

2.6 The accuracy of position information shall, as a minimum, meet the position accuracy requirements established for ELTs.

IS 8.1.2 Construction and Installation

- (a) The following requirements shall apply to an ADFR:
 - (1) Deployment shall take place when the aeroplane structure has been significantly deformed;
 - (2) Deployment shall take place when an aeroplane sinks in water;
 - (3) The ADFR shall not be capable of manual deployment;
 - (4) The ADFR shall be able to float on water;
 - (5) The ADFR deployment shall not compromise the safe continuation of the flight;
 - (6) The ADFR deployment shall not significantly reduce the chance of survival of the recorder and of successful transmission by its ELT;
 - (7) The ADFR deployment shall not release more than one piece;
 - (8) An alert shall be made to the flight crew when the ADFR is no longer captive to the aircraft;
 - (9) The flight crew shall have no means to disable ADFR deployment when the aircraft is airborne;
 - (10) The ADFR shall contain an integrated ELT, which shall activate automatically during the deployment sequence. Such ELT may be of a type that is activated in-flight and provides information from which a position can be determined; and
 - (11) The integrated ELT of an ADFR shall satisfy the same requirements as an ELT required to be installed on an aeroplane. The integrated ELT shall at least have the same performance as the fixed ELT to maximise detection of the transmitted signal.

IS 8.1.4 Continued Serviceability and Inspection of Flight Recorder Systems

- (a) The operator shall, prior to the first flight of the day, monitor the built-in test features for the flight recorders and flight data acquisition unit, when installed, by manual and/or automatic checks.
- (b) FDR systems or ADRS, CVR systems or CARS, and AIR systems or AIRS shall have recording inspection intervals of 1 year; subject to the approval from the Authority, this period may be extended to 2 years provided these systems have demonstrated a high integrity of serviceability and self-monitoring. DLR systems or DLRS shall have recording inspection intervals of 2 years; subject to the approval from the Authority, this period may be extended to 4 years provided these systems have demonstrated high integrity of serviceability and self-monitoring.
- (c) The operator shall carry out inspections as follows:
 - (1) An analysis of the recorded data from the flight recorders shall ensure that the recorder operates correctly for the nominal duration of the recording;
 - (2) The FDR or ADRS recording from a complete flight shall be examined in engineering units to evaluate the validity of all recorded parameters. Particular attention shall be given

- to parameters from sensors dedicated to the FDR or ADRS. Parameters taken from the aircraft's electrical bus system need not be checked if their serviceability can be detected by other aircraft systems;
- (3) The readout facility shall have the necessary software to accurately convert the recorded values to engineering units and to determine the status of discrete signals;
 - (4) An examination of the recorded signal on the CVR or the CARS shall be carried out by replay of the CVR or CARS recording. While installed in the aircraft, the CVR or CARS shall record test signals from each aircraft source and from relevant external sources to ensure that all required signals meet intelligibility standards;
 - (5) Where practicable, during the examination, a sample of in-flight recordings of the CVR or CARS shall be examined for evidence that the intelligibility of the signal is acceptable; and
 - (6) An examination of the recorded images on the AIR or AIRS shall be carried out by replay of the AIR or AIRS recording. While installed in the aircraft, the AIR or AIRS shall record test images from each aircraft source and from relevant external sources to ensure that all required images meet recording quality standards.
 - (7) An examination of the recorded messages on the DLR or DLRS shall be carried out by replay of the DLR or DLRS recording.
- (d) A flight recorder system shall be considered unserviceable if there is a significant period of poor quality data, unintelligible signals, or if one or more of the mandatory parameters is not recorded correctly.
- (e) The operator shall make available a report of the recording inspection on request to Authorities for monitoring purposes.
- (f) Calibration of the FDR system:
- (1) for those parameters which have sensors dedicated only to the FDR and are not checked by other means, recalibration shall be carried out at an interval determined by the continuing airworthiness information for the FDR system. In the absence of such information, a recalibration shall be carried out at least every five years. The recalibration shall determine any discrepancies in the engineering conversion routines for the mandatory parameters and ensure that parameters are being recorded within the calibration tolerances; and
 - (2) when the parameters of altitude and airspeed are provided by sensors that are dedicated to the FDR system, there shall be a recalibration performed at an interval determined by the continuing airworthiness information for the FDR system. In the absence of such information, a recalibration shall be carried out at least every two years.

IS 8.2.1(A) Flight Data Recorders: Types and Parameters – Aeroplane

(a) PARAMETERS – GENERAL.

- (1) The parameters that satisfy the requirements for FDRs are listed in table 1.
- (2) The number of parameters to be recorded shall depend on aeroplane complexity.
- (3) The parameters without an asterisk (*) are mandatory parameters that shall be recorded regardless of aeroplane complexity.

- (4) The parameters designated by an asterisk (*) shall be recorded if an information data source for the parameter is used by aeroplane systems or the flight crew to operate the aeroplane. However, other parameters may be substituted with due regard to the aeroplane type and the characteristics of the recording equipment.
- (b) If further FDR recording capacity is available, recording of the following additional information shall be considered:
- (1) Operational information from electronic display systems, such as EFIS, ECAM, and EICAS. Use the following order of priority:
 - (i) Parameters selected by the flight crew relating to the desired flight path (e.g., barometric pressure setting, selected altitude, selected airspeed, DH, and autoflight system engagement and mode indications if not recorded from another source);
 - (ii) Display system selection/status (e.g., SECTOR, PLAN, ROSE, NAV, WXR, COMPOSITE, COPY);
 - (iii) Warnings and alerts; and
 - (iv) The identity of displayed pages for emergency procedures and checklists.
 - (2) Retardation information including brake application for use in the investigation of landing overruns and rejected take-offs.
 - (a) ALL FLIGHT DECK FLIGHT CONTROL FORCES*. Control wheel, control column, rudder pedal flight deck input forces
 - (b) VERTICAL DEVIATION*. ILS glide path, MLS elevation, GNSS approach path
 - (c) HORIZONTAL DEVIATION*. ILS localiser, MLS azimuth, GNSS approach path
 - (d) DME 1 and 2 distances*
 - (e) PRIMARY NAVIGATION SYSTEM REFERENCE*. GNSS, INS, VOR/DME, MLS, Loran C, ILS
 - (f) BRAKES*. Left and right brake pressure, left and right brake pedal position
 - (g) Date*
 - (h) Event marker*
 - (i) Head up display in use*
 - (j) Para visual display on*
 - (3) PARAMETERS – FLIGHT PATH AND SPEED AS DISPLAYED TO THE PILOT(S).
 The parameters that satisfy the requirements for flight path and speed as displayed to the pilot(s) are listed below. The parameters without an asterisk (*) are mandatory parameters that shall be recorded. In addition, the parameters designated by an asterisk (*) shall be recorded if an information source for the parameter is displayed to the pilot(s) and is practicable to record:
 - (1) Pressure altitude
 - (2) Indicated airspeed or calibrated airspeed
 - (3) Heading (primary flight crew reference)
 - (4) Pitch attitude
 - (5) Roll attitude
 - (6) Engine thrust/power
 - (7) Landing gear status*

- (8) Total or outside air temperature*
 - (9) Time*
 - (10) Navigation data*: drift angle, wind speed, wind direction, latitude/longitude
 - (11) Radio altitude*
- (c) The parameters that satisfy the requirements for ADRS are listed in IS 8.2.2.
- (d) Documentation concerning parameter allocation, conversion equations, periodic calibration, and other serviceability/maintenance information shall be maintained by the operator. The documentation shall be sufficient to ensure that accident investigation authorities have the necessary information to read out the data in engineering units.

Table 1. Parameter Characteristics for Flight Data Recorders – Aeroplanes

The first 16 (or 15) parameters satisfy the requirements for a Type II and Type IIA FDR.

The first 32 parameters satisfy the requirements for a Type I FDR.

The total 78 parameters satisfy the requirements for a Type IA FDR.

Serial Number	Parameter	Applicability	Measurement Range	Maximum Sampling and Recording Interval (seconds)	Accuracy Limits (sensor input compared to FDR read-out)	Recording Resolution
1	Time (UTC when available, otherwise relative time count or GNSS sync)		24 hours	4	±0.125%/h	1 s
2	Pressure altitude		-300 m (-1 000 ft) to maximum certificated altitude of aircraft +1 500 m (+5 000 ft)	1	±30 m to ±200 m (±100 ft to ±700 ft)	1.5 m (5 ft)
3	Indicated airspeed or calibrated airspeed		95 km/h (50 kt) to max V_{S0} (Note 1) V_{S0} to $1.2 V_D$ (Note 2)	1	±5% ±3%	1 kt (0.5 kt recommended)
4	Heading (primary flight crew reference)		360°	1	±2°	0.5°
5	Normal acceleration (Note 8)	Application for type certification submitted to a Contracting State before 01 January 2016	-3 g to +6 g	0.125	±1% of maximum range excluding datum error of ±5%	0.004 g

Serial Number	Parameter	Applicability	Measurement Range	Maximum Sampling and Recording Interval (seconds)	Accuracy Limits (sensor input compared to FDR read-out)	Recording Resolution
		Application for type certification submitted to a Contracting State on or after 01 January 2016	-3 g to +6 g	0.0625	±1% of maximum range excluding datum error of ±5%	0.004 g
6	Pitch attitude		±75° or usable range, whichever is greater	0.25	±2°	0.5°
7	Roll attitude		±180°	0.25	±2°	0.5°
8	Radio transmission keying		On-off (one discrete)	1		
9	Power on each engine (Note 3)		Full range	1 (per engine)	±2%	0.2% of full range or the resolution required to operate the aircraft
10*	Trailing edge flap and flight deck control selection		Full range or each discrete position	2	±5% or as pilot's indicator	0.5% of full range or the resolution required to operate the aircraft
11*	Leading edge flap and flight deck control selection		Full range or each discrete position	2	±5% or as pilot's indicator	0.5% of full range or the resolution required to operate the aircraft
12*	Thrust reverser position		Stowed, in transit, and reverse	1 (per engine)		
13*	Ground spoiler/speed brake selection (selection and position)		Full range or each discrete position	1	±2% unless higher accuracy uniquely required	0.2% of full range
14	Outside air temperature		Sensor range	2	±2°C	0.3°C
15*	Autopilot/autothrottle/AFCS mode and engagement status		A suitable combination of discretised	1		
16	Longitudinal acceleration (Note 8)	Application for type certification submitted to a Contracting State before 01	±1 g	0.25	±0.015 g excluding a datum error of ±0.05 g	0.004 g

Serial Number	Parameter	Applicability	Measurement Range	Maximum Sampling and Recording Interval (seconds)	Accuracy Limits (sensor input compared to FDR read-out)	Recording Resolution
		January 2016				
		Application for type certification submitted to a Contracting State on or after 01 January 2016	±1 g	0.0625	±0.015 g excluding a datum error of ±0.05 g	0.004 g
17	Lateral acceleration (<i>Note 8</i>)	Application for type certification submitted to a Contracting State before 01 January 2016	±1 g	0.25	±0.015 g excluding a datum error of ±0.05 g	0.004 g
		Application for type certification submitted to a Contracting State on or after 01 January 2016	±1 g	0.0625	±0.015 g excluding a datum error of ±0.05 g	0.004 g
18	Pilot input and/or control surface position-primary controls (pitch, roll, yaw) (<i>Notes 4 and 8</i>)	Application for type certification submitted to a Contracting State before 01 January 2016	Full range	0.25	±2° unless higher accuracy uniquely required	0.2% of full range or as installed
		Application for type certification submitted to a Contracting State on or after 01 January 2016	Full range	0.125	±2° unless higher accuracy uniquely required	0.2% of full range or as installed
19	Pitch trim position		Full range	1	±3% unless higher accuracy uniquely required	0.3% of full range or as installed
20*	Radio altitude		-6 m to 750 m (-20 ft to 2 500 ft)	1	±0.6 m (±2 ft) or ±3% whichever is greater below 150 m (500 ft) and ±5% above 150 m (500 ft)	0.3 m (1 ft) below 150 m (500 ft); 0.3 m (1 ft) + 0.5% of full range above 150 m (500 ft)
21*	Vertical beam deviation (ILS/GNSS/GLS glide path, MLS elevation, IRNAV/IAN vertical deviation)		Signal range	1	±3%	0.3% of full range
22*	Horizontal beam deviation (ILS/GNSS/GLS localiser, MLS azimuth, IRNAV/IAN lateral deviation)		Signal range	1	±3%	0.3% of full range

Serial Number	Parameter	Applicability	Measurement Range	Maximum Sampling and Recording Interval (seconds)	Accuracy Limits (sensor input compared to FDR read-out)	Recording Resolution
23	Marker beacon passage		Discrete	1		
24	Master warning		Discrete	1		
25	Each NAV receiver frequency selection (Note 5)		Full range	4	As installed	
26*	DME 1 and 2 distance (includes Distance to runway threshold (GLS) and Distance to missed approach point (IRNAV/IAN) (Notes 5 and 6)		0 – 370 km (0 – 200 NM)	4	As installed	1 852 m (1 NM)
27	Air/ground status		Discrete	1		
28*	GPWS/TAWS/GCAS status (selection of terrain display mode including pop-up display status) and (terrain alerts, both cautions and warnings, and advisories) and (on/off switch position)		Discrete	1		
29*	Angle of attack		Full range	0.5	As installed	0.3% of full range
30*	Hydraulics, each system (low pressure)		Discrete	2		0.5% of full range
31*	Navigation data (latitude/longitude, ground speed, and drift angle) (Note 7)		As installed	1	As installed	
32*	Landing gear and gear selector position		Discrete	4	As installed	
33*	Groundspeed		As installed	1	Data shall be obtained from the most accurate system	1 kt
34	Brakes (left and right brake pressure, left and right brake pedal position)		(Maximum metered brake range, discretized or full range)	1	±5%	2% of full range
35*	Additional engine parameters (EPR, N ₁ , indicated vibration level, N ₂ , EGT, fuel flow, fuel cut-off lever)	Engine fuel metering valve position: Application for type certification submitted to a	As installed	Each engine each second	As installed	2% of full range

Serial Number	Parameter	Applicability	Measurement Range	Maximum Sampling and Recording Interval (seconds)	Accuracy Limits (sensor input compared to FDR read-out)	Recording Resolution
	position, N ₃ , engine fuel metering valve position)	Contracting State on or after 01 January 2023				
36*	TCAS/ACAS (traffic alert and collision avoidance system)		Discretes	1	As installed	
37*	Wind shear warning		Discrete	1	As installed	
38*	Selected barometric setting (pilot, co-pilot)		As installed	64	As installed	0.1 mb (0.01 in-Hg)
39*	Selected altitude (all pilot selectable modes of operation)		As installed	1	As installed	Sufficient to determine crew selection
40*	Selected speed (all pilot selectable modes of operations)		As installed	1	As installed	Sufficient to determine crew selection
41*	Selected Mach (all pilot selectable modes of operation)		As installed	1	As installed	Sufficient to determine crew selection
42*	Selected vertical speed (all pilot selectable modes of operation)		As installed	1	As installed	Sufficient to determine crew selection
43*	Selected heading (all pilot selectable modes of operation)		As installed	1	As installed	Sufficient to determine crew selection
44*	Selected flight path (all pilot selectable modes of operation) (course/DSTRK, path angle, final approach path (IRNAV/IAN))			1	As installed	
45*	Selected DH		As installed	64	As installed	Sufficient to determine crew selection
46*	EFIS display format (pilot, co-pilot)		Discrete(s)	4	As installed	
47*	Multi-function/engine/alerts display format		Discrete(s)	4	As installed	
48*	AC electrical bus status		Discrete(s)	4	As installed	
49*	DC electrical bus status		Discrete(s)	4	As installed	
50*	Engine bleed valve position		Discrete(s)	4	As installed	

Serial Number	Parameter	Applicability	Measurement Range	Maximum Sampling and Recording Interval (seconds)	Accuracy Limits (sensor input compared to FDR read-out)	Recording Resolution
51*	APU bleed valve position		Discrete(s)	4	As installed	
52*	Computer failure		Discrete(s)	4	As installed	
53*	Engine thrust command		As installed	2	As installed	
54*	Engine thrust target		As installed	4	As installed	2% of full range
55*	Computed CG		As installed	64	As installed	1% of full range
56*	Fuel quantity in CG trim tank		As installed	64	As installed	1% of full range
57*	HUD in use		As installed	4	As installed	
58*	Paravirtual display on/off		As installed	1	As installed	
59*	Operational stall protection, stick shaker, and pusher activation		As installed	1	As installed	
60*	Primary navigation system reference (GNSS, INS, VOR/DME, MLS, LORAN C, localiser glideslope)		As installed	4	As installed	
61*	Ice detection		As installed	4	As installed	
62*	Engine warning each engine vibration		As installed	1	As installed	
63*	Engine warning each engine over temperature		As installed	1	As installed	
64*	Engine warning each engine oil pressure low		As installed	1	As installed	
65*	Engine warning each engine over speed		As installed	1	As installed	
66*	Yaw trim surface position		Full range	2	±3% unless higher accuracy uniquely required	0.3% of full range
67*	Roll trim surface position		Full range	2	±3% unless higher accuracy uniquely required	0.3% of full range
68*	Yaw or sideslip angle		Full range	1	±5%	0.5°
69*	De-icing and/or anti-icing systems selection		Discrete(s)	4		
70*	Hydraulic pressure (each system)		Full range	2	±5%	100 psi
71*	Loss of cabin pressure		Discrete	1		

Serial Number	Parameter	Applicability	Measurement Range	Maximum Sampling and Recording Interval (seconds)	Accuracy Limits (sensor input compared to FDR read-out)	Recording Resolution
72*	Flight deck trim control input position, Pitch		Full range	1	±5%	0.2% of full range or as installed
73*	Flight deck trim control input position, Roll		Full range	1	±5%	0.2% of full range or as installed
74*	Flight deck trim control input position, Yaw		Full range	1	±5%	0.2% of full range or as installed
75*	All flight deck flight control input forces (control wheel, control column, rudder pedal)		Full range (±311 N (±70 lbf), ±378 N (±85 lbf), ±734 N (±165 lbf))	1	±5%	0.2% of full range or as installed
76*	Event marker		Discrete	1		
77*	Date		365 days	64		
78*	ANP or EPE or EPU		As installed	4	As installed	
79*	Cabin pressure altitude	Application for type certification submitted to a Contracting State on or after 01 January 2023	As installed (0 m (0 ft) to 12 192 m (40 000 ft) recommended)	1	As installed	31 m (100 ft)
80*	Aeroplane computed weight	Application for type certification submitted to a Contracting State on or after 01 January 2023	As installed	64	As installed	1% of full range
81*	Flight director command	Application for type certification submitted to a Contracting State on or after 01 January 2023	Full range	1	± 2°	0.5°
82*	Vertical speed	Application for type certification submitted to a Contracting State on or after 01 January 2023	As installed	0.25	As installed (32 ft/min recommended)	16 ft/min

Note 1: V_{so} stalling speed or minimum steady flight speed in the landing configuration.

Note 2: V_D design diving speed.

Note 3: Record sufficient inputs to determine power.

Note 4: For aeroplanes with control systems in which movement of a control surface will back drive the pilot's control, "or" applies. For aeroplanes with control systems in which movement of a control surface will not back drive the pilot's control, "and" applies. In aeroplanes with split surfaces, a suitable

Serial Number	Parameter	Applicability	Measurement Range	Maximum Sampling and Recording Interval (seconds)	Accuracy Limits (sensor input compared to FDR read-out)	Recording Resolution
<p><i>combination of inputs is acceptable in lieu of recording each surface separately. In aeroplanes with independent pilot input on primary controls, each pilot input on primary controls needs to be recorded separately.</i></p> <p><i>Note 5: If signal available in digital form.</i></p> <p><i>Note 6: Recording of latitude and longitude from INS or other navigation system is a preferred alternative.</i></p> <p><i>Note 7: If signals readily available.</i></p> <p><i>Note 8: It is not intended that aeroplanes issued with an individual certificate of airworthiness before 01 January 2016 be modified to meet the measurement range, maximum sampling and recording interval, accuracy limits, or recording resolution description detailed in IS 8.2.1(A).</i></p>						

IS 8.2.1(B) Flight Data Recorders and Aircraft Data Recording Systems: Types and Parameters – Helicopters

- (a) The parameters that satisfy the requirements for FDRs are listed in table 2. The number of parameters to be recorded shall depend on helicopter complexity. The parameters without an asterisk (*) are mandatory parameters that shall be recorded. The parameters designated by an asterisk (*) shall also be recorded if an information data source for an asterisked parameter is used by helicopter systems or the flight crew to operate the helicopter. However, other parameters may be substituted with due regard to the helicopter type and the characteristics of the recording equipment.
- (b) The following parameters satisfy the requirements for flight path and speed:
 - (1) Pressure altitude
 - (2) Indicated airspeed
 - (3) Outside air temperature
 - (4) Heading
 - (5) Normal acceleration
 - (6) Lateral acceleration
 - (7) Longitudinal acceleration (body axis)
 - (8) Time or relative time count
 - (9) Navigation data*: drift angle, wind speed, wind direction, latitude/longitude
 - (10) Radio altitude*
- (c) If further FDR recording capacity is available, recording of the following additional information shall be considered:
 - (1) Additional operational information from electronic displays, such as EFIS, ECAM, and EICAS; and
 - (2) Additional engine parameters (EPR, N₁, fuel flow, etc.).
- (d) The parameters that satisfy the requirements for ADRS are listed in IS 8.2.2.

Table 2. Parameter Characteristics for Flight Data Recorders – Helicopters

Serial Number	Parameter	Applicability	Measurement Range	Maximum Sampling and Recording Interval (seconds)	Accuracy Limits (sensor input compared to FDR read-out)	Recording Resolution
1	Time (UTC when available, otherwise relative time count or GNSS time sync)		24 hours	4	±0.125%/h	1 s
2	Pressure altitude		-300 m (-1 000 ft) to maximum certificated altitude of aircraft +1 500 m (+5 000 ft)	1	±30 m to ±200 m (±100 ft to ±700 ft)	1.5 m (5 ft)
3	Indicated airspeed		As the installed pilot display measuring	1	±3%	1 kt

Serial Number	Parameter	Applicability	Measurement Range	Maximum Sampling and Recording Interval (seconds)	Accuracy Limits (sensor input compared to FDR read-out)	Recording Resolution
			system			
4	Heading		360°	1	± 2°	0.5°
5	Normal acceleration		-3 g to +6 g	0.125	±0.09 g excluding a datum error of ±0.045 g	0.004 g
6	Pitch attitude		±75° or 100% of usable range, whichever is greater	0.5	± 2°	0.5°
7	Roll attitude		±180°	0.5	±2°	0.5°
8	Radio transmission keying		On-off (one discrete)	1	---	---
9	Power on each engine		Full range	1 (per engine)	±2%	0.1% of full range
10	Main rotor					
	Main rotor speed		50% – 130%	0.51	±2%	0.3% of full range
	Rotor brake		Discrete		---	---
11	Pilot input and/or control surface position-primary controls (Collective pitch, longitudinal cyclic pitch, lateral cyclic pitch, tail rotor pedal)		Full range	0.5 (0.25 recommended)	±2% unless higher accuracy uniquely required	0.5% of operating range
12	Hydraulics, each system (low pressure and selection)		Discrete	1	---	---
13	Outside air temperature		Sensor range	2	±2°C	0.3°C
14*	Autopilot/autothrottle/AFCS mode and engagement status		A suitable combination of discrettes	1	---	---
15*	Stability augmentation		Discrete	1	---	---

Serial Number	Parameter	Applicability	Measurement Range	Maximum Sampling and Recording Interval (seconds)	Accuracy Limits (sensor input compared to FDR read-out)	Recording Resolution
	system engagement					
16*	Main gearbox oil pressure		As installed	1	As installed	6.895 kN/m ² (1 psi)
17*	Main gearbox oil temperature		As installed	2	As installed	1°C
18	Yaw acceleration (or yaw rate)		±400°/second	0.25	±1.5% max range excluding datum error of ±5%	±2°/s
19*	Sling load force		0 to 200% of certified load	0.5	±3% of max range	0.5% for maximum certified load
20	Longitudinal acceleration		±1 g	0.25	±0.015 g excluding datum error of ± 0.05 g	0.0004 g
21	Lateral acceleration		±1 g	0.25	±0.015 g excluding datum error of ± 0.05 g	0.0004 g
22*	Radio altitude		-6 m to 750 m (-20 ft to 2 500 ft)	1	±0.6 m (±2 ft) or ±3% whichever is greater below 150 m (500 ft) and ±5% above 150 m (500 ft)	0.3 m (1ft) below 150 m (500 ft), 0.3 m (1 ft) + 0.5% of full range above 150 m (500 ft)
23*	Vertical beam deviation		Signal range	1	±3%	0.3% of full range
24*	Horizontal beam deviation		Signal range	1	±3%	0.3% of full range
25	Marker beacon passage		Discrete	1	---	---
26	Warnings		Discrete(s)	1	---	---
27	Each navigation receiver frequency selection		Sufficient to determine selected frequency	4	As installed	----
28*	DME 1 and 2 distance		0 – 370 km (0 – 200 NM)	4	As installed	1 852 m (1 NM)
29*	Navigation data (latitude/longitude, ground speed,		As installed	2	As installed	As installed

Serial Number	Parameter	Applicability	Measurement Range	Maximum Sampling and Recording Interval (seconds)	Accuracy Limits (sensor input compared to FDR read-out)	Recording Resolution
	drift angle, wind speed, wind direction)					
30*	Landing gear or gear selector position		Discrete	4	---	---
31*	Engine exhaust gas temperature (T ₄)		As installed	1	As installed	
32*	Turbine inlet temperature (TIT/ITT)		As installed	1	As installed	
33*	Fuel contents		As installed	4	As installed	
34*	Altitude rate		As installed	1	As installed	
35*	Ice detection		As installed	4	As installed	
36*	Helicopter health and usage monitor system		As installed	—	As installed	
37	Engine control modes		Discrete	1	----	----
38*	Selected barometric setting (pilot and co-pilot)		As installed	64	As installed	0.1 mb (0.01 in Hg)
39*	Selected altitude (all pilot selectable modes of operation)		As installed	1	As installed	Sufficient to determine crew selection
40*	Selected speed (all pilot selectable modes of operation)		As installed	1	As installed	Sufficient to determine crew selection
41*	Selected Mach (all pilot selectable modes of operation)		As installed	1	As installed	Sufficient to determine crew selection
42*	Selected vertical speed (all pilot selectable modes of operation)		As installed	1	As installed	Sufficient to determine crew selection
43*	Selected heading (all pilot selectable		As installed	1	As installed	Sufficient to determine

Serial Number	Parameter	Applicability	Measurement Range	Maximum Sampling and Recording Interval (seconds)	Accuracy Limits (sensor input compared to FDR read-out)	Recording Resolution
	modes of operation)					crew selection
44*	Selected flight path (all pilot selectable modes of operation)		As installed	1	As installed	Sufficient to determine crew selection
45*	Selected DH		As installed	4	As installed	Sufficient to determine crew selection
46*	EFIS display format (pilot and co-pilot)		Discrete(s)	4	---	---
47*	Multi-function/engine/alerts display format		Discrete(s)	4	---	---
48*	Event marker		Discrete	1	---	---
49*	GPWS/TAWS/GCAS status (selection of terrain display mode including pop-up display status) and (terrain alerts, both cautions and warnings, and advisories) and (on/off switch position) and (operational status)	Application for type certification submitted to a Contracting State on or after 01 January 2023	Discrete(s)	1	As installed	
50*	TCAS/ACAS (traffic alert and collision avoidance system) and (operational status)	Application for type certification submitted to a Contracting State on or after 01 January 2023	Discrete(s)	1	As installed	
51*	Primary flight	Application	Full range	0.125 (0.0625	± 3% unless	0.5% of operating

Serial Number	Parameter	Applicability	Measurement Range		Maximum Sampling and Recording Interval (seconds)	Accuracy Limits (sensor input compared to FDR read-out)	Recording Resolution
	controls – pilot input forces	for type certification submitted to a Contracting State on or after 01 January 2023		recommended)	higher accuracy is uniquely required	range	
52*	Computed centre of gravity	Application for type certification submitted to a Contracting State on or after 01 January 2023	As installed	64	As installed	1% of full range	
53*	Helicopter computed weight	Application for type certification submitted to a Contracting State on or after 01 January 2023	As installed	64	As installed	1% of full range	

IS 8.2.2 Aircraft Equipment for Operation – Aircraft Data Recording System

- (a) ADRS shall be capable of recording, as appropriate to the aircraft, at least the essential (E) parameters listed in table 3.
- (b) The measurement range, recording interval, and accuracy of parameters on installed equipment is usually verified by methods approved by the Authority.

Table 3. Parameter Characteristics for Aircraft Data Recording Systems

No.	Parameter Name	Minimum Recording Range	Maximum Recording Interval in Seconds	Minimum Recording Accuracy	Minimum Recording Resolution	Remarks
1	(a) Heading (Magnetic or True)	±180°	1	±2°	0.5°	Heading is preferred; if not available, yaw rate shall be recorded
	(b) Yaw rate	±300°/s	0.25	±1% + drift of 360°/h	2°/s	
2	(a) Pitch attitude	±90°	0.25	±2°	0.5°	Pitch attitude is preferred; if not available, pitch rate shall be recorded
	(b) Pitch rate	±300°/s	0.25	±1% + drift of 360°/h	2°/s	
3	(a) Roll attitude	±180°	0.25	±2°	0.5°	Roll attitude is preferred; if not available, roll rate shall be recorded
	(b) Roll rate	±300°/s	0.25	±1% + drift of 360°/h	2°/s	
4	Positioning system:					
	(a) Time	24 hours	1	±0.5 s	0.1 s	UTC time preferred where available
	(b) Latitude/longitude	Latitude: ±90° Longitude: ±180°	2 (1 if available)	As installed (0.00015° recommended)	0.00005°	--
	(c) Altitude	-300 m (-1 000 ft) to maximum certificated altitude of aeroplane +1 500 m (5 000 ft)	2 (1 if available)	As installed (±15 m (±50 ft) recommended)	1.5 m (5 ft)	--

No.	Parameter Name	Minimum Recording Range	Maximum Recording Interval in Seconds	Minimum Recording Accuracy	Minimum Recording Resolution	Remarks
	(d) Ground speed	0 – 1 000 kt	2 (1 if available)	As installed (±5 kt recommended)	1 kt	
	(e) Track	0 – 360°	2 (1 if available)	As installed (±2° recommended)	0.5°	
	(f) Estimated error	Available range	2 (1 if available)	As installed	As installed	Shall be recorded if readily available
5	Normal acceleration	-3 g to + 6 g (*)	0.25 (0.125 if available)	As installed (±0.09 g excluding a datum error of ±45 g recommended)	0.004 g	--
6	Longitudinal acceleration	±1 g (*)	0.25 (0.125 if available)	As installed (±0.015 g excluding a datum error of ±0.05 g recommended)	0.004 g	--
7	Lateral acceleration	±1 g (*)	0.25 (0.125 if available)	As installed (±0.015 g excluding a datum error of ±0.05 g recommended)	0.004 g	--
8	External static pressure (or pressure altitude)	34.4 mb (3.44 in-Hg) to 310.2 mb (31.02 in-Hg) or available sensor range	1	As installed (±1 mb (0.1 in-Hg) or ±30 m (±100 ft) to ±210 m (±700 ft) recommended)	0.1 mb (0.01 in-Hg) or 1.5 m (5 ft)	--
9	Outside air temperature (or total air temperature)	-50 to +90°C or available sensor range	2	As installed (±2°C recommended)	1°C	--
10	Indicated air	As the	1	As installed	1 kt (0.5 kt)	--

No.	Parameter Name	Minimum Recording Range	Maximum Recording Interval in Seconds	Minimum Recording Accuracy	Minimum Recording Resolution	Remarks
	speed	installed pilot display measuring system or available sensor range		(±3% recommended)	recommended)	
11	Engine RPM	Full range including overspeed condition	Each engine each second	As installed	0.2% of full range	--
12	Engine oil pressure	Full range	Each engine each second	As installed (5% of full range recommended)	2% of full range	--
13	Engine oil temperature	Full range	Each engine each second	As installed (5% of full range recommended)	2% of full range	--
14	Fuel flow or pressure	Full range	Each engine each second	As installed	2% of full range	--
15	Manifold pressure	Full range	Each engine each second	As installed	0.2% of full range	--
16	Engine thrust/ power/ torque parameters required to determine propulsive thrust/power*	Full range	Each engine each second	As installed	0.1% of full range	*Sufficient parameters (e.g., EPRN/N1 or torque/Np as appropriate to the particular engine shall be recorded to determine power in both normal and reverse thrust. A margin for possible overspeed shall be provided)
17	Engine gas generator speed (Ng)	0 – 150%	Each engine each second	As installed	0.2% of full range	--
18	Free power turbine speed	0 – 150%	Each engine each	As installed	0.2% of full range	--

No.	Parameter Name	Minimum Recording Range	Maximum Recording Interval in Seconds	Minimum Recording Accuracy	Minimum Recording Resolution	Remarks
	(Nf)		second			
19	Coolant temperature	Full range	1	As installed ($\pm 5^{\circ}\text{C}$ recommended)	1 $^{\circ}\text{C}$	--
20	Main voltage	Full range	Each engine each second	As installed	1 Volt	--
21	Cylinder head temperature	Full range	Each cylinder each second	As installed	2% of full range	--
22	Flaps position	Full range or each discrete position	2	As installed	0.5 $^{\circ}$	--
23	Primary flight control surface position	Full range	0.25	As installed	0.2% of full range	--
24	Fuel quantity	Full range	4	As installed	1% of full range	--
25	Exhaust gas temperature	Full range	Each engine each second	As installed	2% of full range	--
26	Emergency voltage	Full range	Each engine each second	As installed	1 Volt	--
27	Trim surface position	Full range or each discrete position	1	As installed	0.3% of full range	--
28	Landing gear position	Each discrete position*	Each gear every 2 seconds	As installed	--	*Where available, record up-and-locked and down-and-locked position
29	Novel/unique aircraft features	As required	As required	As required	As required	--

IS 8.4.1 Data Link Recorder Applicability

- (a) Messages applying to the applications listed in table 4 shall be recorded. Applications without the asterisk (*) are mandatory applications that shall be recorded regardless of the system complexity. Applications with an (*) shall be recorded only as far as is practicable given the architecture of the system.
- (b) Descriptions of the applications for DLRs are contained in the table 4.

Table 4. Description of Applications for Data Link Recorders

Item No.	Application Type	Application Description	Recording Content
1	Data link initiation	This includes any applications used to log on to or initiate data link service. In FANS-1/A and ATN, these are ATS facilities notification (AFN) and context management (CM), respectively	C
2	Controller/pilot communication	This includes any application used to exchange requests, clearances, instructions, and reports between the flight crew and controllers on the ground. In FANS-1/A and ATN, this includes the CPDLC application. It also includes applications used for the exchange of oceanic (OCL) and departure clearances (DCL) as well as data link delivery of taxi clearances	C
3	Addressed surveillance	This includes any surveillance application in which the ground sets up contracts for delivery of surveillance data. In FANS-1/A and ATN, this includes the automatic dependent surveillance – contract (ADS-C) application. Where parametric data are reported within the message they shall be recorded within the message, they shall be recorded unless data from the same source are recorded on the FDR	C
4	Flight information	This includes any service used for delivery of flight information to specific aircraft. This includes, for example, data link aviation weather report service (D-METAR), data link automatic terminal service (D-ATIS), digital Notice to Airmen (D-NOTAM) and other textual data link services	C
5	Aircraft	This includes elementary and enhanced	M*

Item No.	Application Type	Application Description	Recording Content
	broadcast surveillance	surveillance systems, as well as ADS-B output data. Where parametric data sent by the aircraft are reported within the message, they shall be recorded unless data from the same sources are recorded on the FDR	
6	Aeronautical operational control data	This includes any application transmitting or receiving data used for aeronautical operational control purposes	M*

Key:

C Complete contents recorded.

M Information that enables correlation to any associated records stored separately from the aircraft.

* Applications to be recorded only as far as is practicable given the architecture of the system.

(c) DLC recording installation clarification is contained in table 5.

Table 5. Data Link Communications (DLC) Recording Installation Clarification

Rows	Date individual certificate of airworthiness was first issued	Date aircraft TC issued or modification for DLC equipment first approved	Date of activation for use of DLC equipment	DLC recording required	SARPs reference
1	On or after 01 January 2016	On or after 01 January 2016	On or after 01 January 2016	Yes	6.3.3.1.1
2	On or after 01 January 2016	Before 01 January 2016	On or after 01 January 2016	Yes	6.3.3.1.1
3	Before 01 January 2016	On or after 01 January 2016	On or after 01 January 2016	Yes	6.3.3.1.2
4	Before 01 January 2016	Before 01 January 2016	Before 01 January 2016	No	6.3.3.1.2
5	Before 01 January 2016	Before 01 January 2016	On or after 01 January 2016	No ¹	6.3.3.1.2 6.3.3.1.3

¹ Not required, but recommended

Notes:

1. *Date individual certificate of airworthiness was first issued* is self-explanatory.
2. *Date aircraft TC issued or modification for DLC equipment first approved* is the date that allows the installation of DLC equipment on the aircraft and refers to the airworthiness approval of the installation of aircraft components such as the structural and wiring

provisions with which the DLC equipment needs to be compliant. These airworthiness approvals are usually in a form of a TC, a supplemental TC, or an amended TC. It is not uncommon for original customers of an aircraft that have airworthiness approvals related to DLC capability, to choose not to install the DLC equipment or choose not to have it activated even if the aircraft is prepared for it.

3. *Date of activation for use of DLC equipment* refers to the date that a DLC application referred to in paragraph 8.4.1(d) of this part was first activated for use.
 - DLC equipment as used in these provisions, refer to the physical unit(s) (e.g., box(es)) that was approved to a minimum performance standard issued by a certification authority (e.g., TSO or ETSO).
 - The activation of DLC functions refers to approved software activation of DLC functions or software updates.
4. *DLC recording required* refers to the requirement to record DLC messages in accordance with provisions of paragraphs 8.4.1(a), 8.4.1(b), and 8.4.1(d) of this Part.

(d) GENERAL.

- (1) It is the date on which the CVR capabilities of the aircraft were approved that determines the DLC recording requirement. The date in which the DLC equipment was approved to a minimum performance standard is not relevant for CVR recording requirement purposes.
- (2) For the DLC equipment to be compliant with an airworthiness approval, it needs to be able to use, without modification, the installed aircraft components that are necessary to provide the DLC function such as the:
 - (i) Datalink router (e.g., hosted in the communications management unit), and
 - (ii) Radios (e.g., VHF, HF datalink, Satcom) and related antennas.
- (3) Approved software updates to installed equipment or software activation of functions normally do not alter the DLC equipment compliance with the rest of the aircraft systems.

(e) EXAMPLES.

- (1) For rows 1 and 2: The recording requirement is driven by paragraph 8.4.1(a) of this Part, which is based on when the individual certificate of airworthiness was first issued. Any subsequent airworthiness modifications related to DLC capability do not exempt the aircraft from the requirement to record DLC messages.
- (2) For rows 3 to 5 — General:
 - (i) The recording requirement is driven by paragraph 8.4.1(b) of this Part and is based on whether or not the aircraft has an airworthiness approval for DLC capabilities and the date of its issue.
 - (ii) Since there was no requirement to record DLC messages prior to 01 January 2016, airworthiness approvals related to DLC capability issued before that date did not necessarily include this function.
- (3) For row 3: The recording requirement applies regardless of when the certificate of airworthiness was issued, because an airworthiness approval related to DLC capability was issued on or after 01 January 2016. The date of installation of the equipment would typically be after the airworthiness approval.

- (4) For row 4: The recording requirement does not apply because the aircraft's certificate of airworthiness and an airworthiness approval related to DLC capability was issued before 01 January 2016. The date of installation of DLC equipment is not a factor for DLC message recording requirements as long as the equipment is compliant with that airworthiness approval.
- (5) For row 5:
 - (i) The recording requirement does not apply because the aircraft's certificate of airworthiness and an airworthiness approval related to DLC capability was issued before 01 January 2016. The date of installation of DLC equipment is not a factor for DLC message recording requirements as long as the equipment is compliant with that airworthiness approval.
 - (ii) Notwithstanding the above, if the activation for use of the DLC equipment is on or after 01 January 2016, DLC messages shall be recorded in accordance with paragraph 8.4.1(d) of this Part.

IS 9.1.2 Emergency Exit Equipment – Passengers

- (a) The emergency exit equipment for aeroplanes in paragraph 9.1.2(a) of this Part shall meet the following requirements.
- (b) The assisting means for a floor-level emergency exit shall meet the requirements under which the aeroplane was type certified.
- (c) The location of each passenger emergency exit shall be:
 - (1) Recognisable from a distance equal to the width of the cabin; and
 - (2) Indicated by a sign visible to occupants approaching along the main passenger aisle.
- (d) There shall be an emergency exit locating sign:
 - (1) Above the aisle near each over-the-wing passenger emergency exit, or at another ceiling location if it is more practical because of low headroom;
 - (2) Next to each floor-level passenger emergency exit, except that one sign may serve two such exits if they both can be seen readily from that sign; and
 - (3) On each bulkhead or divider that prevents fore and aft vision along the passenger cabin, to indicate emergency exits beyond and obscured by it, except that if this is not possible, the sign may be placed at another appropriate location.
- (e) Each passenger emergency exit marking and each locating sign shall be manufactured to meet the interior emergency exit marking requirements under which the aeroplane was type certified, unless the Authority cites different requirements for compliance with this paragraph.
- (f) Sources of general cabin illumination may be common to both the emergency and the main lighting systems if the power supply to the emergency light system is independent of the power supply to the main lighting system.
 - (1) The emergency lighting system shall provide enough general lighting in the passenger cabin so that the average illumination, when measured at 40-inch intervals at seat armrest height, on the centerline of the main passenger aisle, is at least 0.05 foot-candles.
 - (2) Each emergency light shall:
 - (i) Be operable manually both from the flight crew station and from a point in the passenger compartment that is readily accessible to a normal cabin crew member seat;
 - (ii) Have a means to prevent inadvertent operation of the manual controls;
 - (iii) When armed or turned on at either station, remain lighted or become lighted upon interruption of the aeroplane's normal electric power;
 - (iv) Provide the required level of illumination for at least 10 minutes at the critical ambient conditions after emergency landing; and
 - (v) Have a flight deck control device that has "on," "off," and "armed" positions.
 - (3) The location of each passenger emergency exit operating handle and instructions for opening the exit shall be shown in accordance with the requirements under which the aeroplane was type certified, unless the Authority cites different requirements for compliance with this paragraph.
 - (4) No operating handle or operating handle cover may continue to be used if its luminescence (brightness) decreases to below 100 micro lamberts.

- (5) Access to emergency exits shall be provided as follows for each passenger-carrying aeroplane:
- (i) Each passageway between individual passenger areas, or leading to a Type I or Type II emergency exit, shall be unobstructed and at least 20 inches wide;
 - (ii) There shall be enough space next to each Type I or Type II emergency exit to allow a crew member to assist in the evacuation of passengers without reducing the unobstructed width of the passageway below that required in paragraph(a)(4)(i) of this IS; and
 - (iii) There shall be access from the main aisle to each Type III and Type IV exit. The access from the aisle to these exits shall not be obstructed by seats, berths, or other protrusions in a manner that would reduce the effectiveness of the exit. In addition, the access shall meet the emergency exit access requirements under which the aeroplane was type certificated, unless the Authority cites different requirements for compliance with this paragraph.
- (6) If it is necessary to pass through a passageway between passenger compartments to reach any required emergency exit from any seat in the passenger cabin, the passageway shall not be obstructed. However, curtains may be used if they allow free entry through the passageway.
- (7) No door may be installed in any partition between passenger compartments.
- (8) If it is necessary to pass through a doorway separating the passenger cabin from other areas to reach any required emergency exit from any passenger seat, the door shall have a means to latch it in open position, and the door shall be latched open during each take-off and landing. The latching means shall be able to withstand the loads imposed upon it when the door is subjected to the ultimate inertia forces, relative to the surrounding structure, prescribed in the airworthiness standards for type certification in the transport category as cited by the Authority.
- (9) Each passenger emergency exit and the means of opening that exit from the outside shall be marked on the outside of the aeroplane with a 5-cm (2-in) coloured band outlining the exit on the side of the fuselage.
- (10) Each passenger emergency exit marking, including the band, shall be readily distinguishable from the surrounding fuselage area by contrast in colour and shall comply with the following:
- (i) If the reflectance of the darker colour is 15 per cent or less, the reflectance of the lighter colour shall be at least 45 per cent; and
 - (ii) If the reflectance of the darker colour is greater than 15 per cent, at least a 30 per cent difference between its reflectance and the reflectance of the lighter colour shall be provided.
- (11) Exits that are not in the side of the fuselage shall have external means of opening and applicable instructions marked conspicuously in red or, if red is inconspicuous against the background colour, in bright chrome yellow and, when the opening means for such an exit is located on only one side of the fuselage, a conspicuous marking to that effect shall be provided on the other side.

- (12) Each passenger-carrying aeroplane shall be equipped with exterior lighting that meets the requirements under which that aeroplane was type certificated, unless the Authority cites different requirement for compliance with this paragraph.
- (13) Each passenger-carrying aeroplane shall be equipped with a slip-resistant escape route that meets the requirements under which that aeroplane was type certificated, unless the Authority cites different requirements for compliance with this paragraph.
- (14) Each floor-level door or exit in the side of the fuselage (other than those leading into a cargo or baggage compartment that is not accessible from the passenger cabin) that is 112 cm (44 in) or more high and 51 cm (20 in) or more wide, but not wider than 117 cm (46 in), each passenger ventral exit, and each tail cone exit shall meet the requirements of this section for floor-level emergency exits.
- (15) Approved emergency exits in the passenger compartments that are in excess of the minimum number of required emergency exits shall meet all the applicable provisions of this IS and shall be readily accessible.
- (16) The ventral exit and tail cone exit on each passenger-carrying aeroplane with a certificated take-off mass of 5 700 kg (12 500 lbs) or more shall be:
 - (i) Designed and constructed so that it cannot be opened during flight; and
 - (ii) Marked with a placard readable from a distance of 76 cm (30 in) and installed at a conspicuous location near the means of opening the exit, stating that the exit has been designed and constructed so that it cannot be opened during flight.
- (17) **PORTABLE LIGHTS.** No person may operate a passenger-carrying aeroplane unless the aeroplane is equipped with independent portable light stowage provisions accessible from each cabin crew member seat.

IS 9.1.11 First Aid Kits and Universal Precaution Kits

- (a) The required first aid kits shall include at least the following:
 - (1) List of contents
 - (2) Antiseptic swabs (10/pack)
 - (3) Bandage: adhesive strips
 - (4) Bandage: gauze 7.5 cm × 4.5 m
 - (5) Bandage: triangular; safety pins
 - (6) Dressing: burn 10 cm × 10 cm
 - (7) Dressing: compress, sterile 7.5 cm × 12 cm
 - (8) Dressing: gauze, sterile 10.4 cm × 10.4 cm
 - (9) Tape: adhesive 2.5 cm (roll)
 - (10) Steri-strips (or equivalent adhesive strip)
 - (11) Hand cleanser or cleansing towelettes
 - (12) Pad with shield, or tape, for eye
 - (13) Scissors: 10 cm [as allowed by national regulations]
 - (14) Tape: Adhesive, surgical 1.2 cm × 4.6 m
 - (15) Tweezers: splinter
 - (16) Disposable gloves (multiple pairs)
 - (17) Thermometers (non-mercury)
 - (18) Mouth-to-mouth resuscitation mask with one-way valve
 - (19) First aid manual, current edition
 - (20) Incident record form
 - (21) Mild to moderate analgesic [as allowed by national regulations]
 - (22) Antiemetic [as allowed by national regulations]
 - (23) Nasal decongestant [as allowed by national regulations]
 - (24) Antacid [as allowed by national regulations]
 - (25) Antihistamine [as allowed by national regulations]
- (b) The required universal precaution kits shall include at least the following:
 - (1) Dry powder that can convert a small liquid spill into a sterile granulated gel
 - (2) Germicidal disinfectant for surface cleaning
 - (3) Skin wipes
 - (4) Face/eye mask (separate or combined)
 - (5) Gloves (disposable)
 - (6) Protective apron
 - (7) Large absorbent towel
 - (8) Pick-up scoop with scraper
 - (9) Bio-hazard disposal waste bag
 - (10) Instructions

IS 9.1.12 Emergency Medical Kit – Aeroplanes

- (a) [AOC] The required emergency medical kit shall include the following equipment:
 - (1) List of contents
 - (2) Stethoscope
 - (3) Sphygmomanometer (electronic preferred)
 - (4) Airways, oropharyngeal (three sizes)
 - (5) Syringes (appropriate range of sizes)
 - (6) Needles (appropriate range of sizes)
 - (7) Intravenous catheters (appropriate range of sizes)
 - (8) Antiseptic wipes
 - (9) Gloves (disposable)
 - (10) Needle disposal box
 - (11) Urinary catheter
 - (12) System for delivering intravenous fluids
 - (13) Venous tourniquet
 - (14) Sponge gauze
 - (15) Tape – adhesive
 - (16) Surgical mask
 - (17) Emergency tracheal catheter (or large gauge intravenous cannula)
 - (18) Umbilical cord clamp
 - (19) Thermometers (non-mercury)
 - (20) Basic life support cards
 - (21) Bag-valve mask
 - (22) Flashlight and batteries
- (b) [AOC] The required emergency medical kit shall include the following medication:
 - (1) Epinephrine 1:1 000
 - (2) Antihistamine – injectable
 - (3) Dextrose 50% (or equivalent) – injectable: 50 ml
 - (4) Nitroglycerin tablets, or spray
 - (5) Major analgesic
 - (6) Sedative anticonvulsant – injectable
 - (7) Antiemetic – injectable
 - (8) Bronchial dilator – inhaler
 - (9) Atropine – injectable
 - (10) Adrenocortical steroid – injectable
 - (11) Diuretic – injectable
 - (12) Medication for postpartum bleeding
 - (13) Sodium chloride 0.9% (minimum 250 ml)
 - (14) Acetyl salicylic acid (aspirin) for oral use
 - (15) Oral beta blocker

IS 9.1.13 Oxygen Storage and Dispensing Apparatus

- (a) The supplemental oxygen supply requirements for non-pressurised aeroplanes are as follows:
 - (1) An operator shall not operate a non-pressurised aeroplane at pressure altitudes above 3 000 m (10 000 ft) unless supplemental oxygen equipment, capable of storing and dispensing the oxygen supplies required, is provided.
 - (2) The amount of supplemental oxygen for sustenance required for a particular operation shall be determined on the basis of flight altitudes and flight duration, consistent with the operating procedures, established for each operation in the OM and with the routes to be flown, and with the emergency procedures specified in the OM.
 - (3) An aeroplane intended to be operated above 3 000 m (10 000 ft) pressure altitude shall be provided with equipment capable of storing and dispensing the oxygen supplies required.
 - (4) OXYGEN SUPPLY REQUIREMENTS.
 - (5) FLIGHT CREW MEMBERS. Each member of the flight crew on flight deck duty shall be supplied with supplemental oxygen in accordance with table 5. If all occupants of flight deck seats are supplied from the flight crew source of oxygen supply, then they shall be considered as flight crew members on flight deck duty for the purpose of oxygen supply.
 - (6) CABIN CREW MEMBERS, ADDITIONAL CREW MEMBERS, AND PASSENGERS. Cabin crew members and passengers shall be supplied with oxygen in accordance with table 5. Cabin crew members carried in addition to the minimum number of cabin crew members required, and additional crew members, shall be considered as passengers for the purpose of oxygen supply.

Table 5. Supplemental Oxygen for Non-Pressurised Aeroplanes

(a)	(b)
Supply for:	Duration and Pressure Altitude
1. All occupants of flight deck seats on flight deck duty	Entire flight time at pressure altitudes above 3 000 m (10 000 ft)
2. All required cabin crew members	Entire flight time at pressure altitudes above 4 000 m (13 000 ft) and for any period exceeding 30 minutes at pressure altitudes above 3 000 m (10 000 ft) but not exceeding 4 000 m (13 000 ft)
3. 100% of passengers (<i>see Note</i>)	Entire flight time at pressure altitudes above 4 000 m (13 000 ft)
4. 10% of passengers (<i>see Note</i>)	Entire flight time after 30 minutes at pressure altitudes greater than 3 000 m (10 000 ft) but not exceeding 4 000 m (13 000 ft)

Note: For the purpose of this table, “passengers” means passengers actually carried and includes infants.

- (b) The supplemental oxygen supply requirements for pressurised aeroplanes are as follows:
- (1) An operator shall not operate a pressurised aeroplane at pressure altitudes above 3 000 m (10 000 ft) unless supplemental oxygen equipment, capable of storing and dispensing the oxygen supplies required by this paragraph, is provided.
 - (2) The amount of supplemental oxygen required shall be determined on the basis of cabin pressure altitude, flight duration, and the assumption that a cabin pressurisation failure will occur at the altitude or point of flight that is most critical from the standpoint of oxygen need, and that, after the failure, the aeroplane will descend in accordance with emergency procedures specified in the AFM to a safe altitude for the route to be flown that will allow continued safe flight and landing.
 - (3) Following a cabin pressurisation failure, the cabin pressure altitude shall be considered the same as the aeroplane pressure altitude, unless it is demonstrated to the Authority that no probable failure of the cabin or pressurisation system will result in a cabin pressure altitude equal to the aeroplane pressure altitude. Under these circumstances, the demonstrated maximum cabin pressure altitude may be used as a basis for determination of oxygen supply.
 - (4) OXYGEN EQUIPMENT AND SUPPLY REQUIREMENTS.
 - (5) FLIGHT CREW MEMBERS.
 - (i) Each member of the flight crew on flight deck duty shall be supplied with supplemental oxygen in accordance with table 6. If all occupants of flight deck seats are supplied from the flight crew source of oxygen supply, then they shall be considered as flight crew members on flight deck duty for the purpose of oxygen supply.
 - (ii) Flight deck seat occupants not supplied by the flight crew source are to be considered as passengers for the purpose of oxygen supply.
 - (iii) Oxygen masks shall be located so as to be within the immediate reach of flight crew members whilst at their assigned duty station.
 - (iv) Oxygen masks for use by flight crew members in pressurised aeroplanes operating at pressure altitudes above 7 600 m (25 000 ft) shall be a quick-donning type of mask.
 - (6) CABIN CREW MEMBERS, ADDITIONAL CREW MEMBERS, AND PASSENGERS.
 - (i) Cabin crew members and passengers shall be supplied with supplemental oxygen in accordance with table 6. Cabin crew members carried in addition to the minimum number of cabin crew members required, and additional crew members, shall be considered as passengers for the purpose of oxygen supply.
 - (ii) Aeroplanes intended to be operated at pressure altitudes above 7 600 m (25 000 ft) shall be provided sufficient spare outlets and masks and/or sufficient portable oxygen units with masks for use by all required cabin crew members. The spare outlets and/or portable oxygen units are to be distributed evenly throughout the cabin to ensure immediate availability of oxygen to each required cabin crew member regardless of his or her location at the time of cabin pressurisation failure.
 - (iii) Aeroplanes intended to be operated at pressure altitudes above 7 600 m (25 000 ft) shall be provided an oxygen dispensing unit connected to oxygen supply terminals

immediately available to each occupant, wherever seated. The total number of dispensing units and outlets shall exceed the number of seats by at least 10 per cent. The extra units shall be evenly distributed throughout the cabin.

- (iv) Aeroplanes intended to be operated at pressure altitudes above 7 600 m (25 000 ft) or which, if operated at or below 7 600 m (25 000 ft), cannot descend safely within 4 minutes to 4 000 m (13 000 ft), and for which the individual certificate of airworthiness was first issued on or after 09 November 1998, shall be provided with automatically deployable oxygen equipment immediately available to each occupant, wherever seated. The total number of dispensing units and outlets shall exceed the number of seats by at least 10 per cent. The extra units shall be evenly distributed throughout the cabin.
- (v) The oxygen supply requirements, as specified in table 6, for aeroplanes not certificated to fly at altitudes above 7 600 m (25 000 ft), may be reduced to the entire flight time between 3 000 m (10 000 ft) and 4 000 m (13 000 ft) cabin pressure altitudes for all required cabin crew members and for at least 10 per cent of the passengers if, at all points along the route to be flown, the aeroplane is able to descend safely within 4 minutes to a cabin pressure altitude of 4 000 m (13 000 ft).

Table 6. Requirements for Supplemental Oxygen for Pressurised Aeroplanes

Supply for:	Duration and Cabin Pressure Altitude
1. All occupants of flight deck seats on flight deck duty	Entire flight time when the cabin pressure altitude exceeds 13 000 ft and entire time when the cabin pressure altitude exceeds 10 000 ft but does not exceed 13 000 ft after the first 30 minutes at those altitudes, but in no case less than: (i) 30 minutes for aeroplanes certificated to fly at altitudes not exceeding 25 000 ft (<i>Note 2</i>) (ii) 2 hours for aeroplanes certificated to fly at altitudes more than 25 000 ft (<i>Note 3</i>)
2. All required cabin crew members	Entire flight time when cabin pressure altitude exceeds 13 000 ft but not less than 30 minutes (<i>Note 2</i>), and entire flight time when cabin pressure altitude is greater than 10 000 ft but does not exceed 13 000 ft after the first 30 minutes at these altitudes
3. 100% of passengers	10 minutes or the entire flight time when the cabin pressure altitude exceeds 13 000 ft, whichever is greater (<i>Note 4</i>)
4. 10% of passengers	Entire flight time when the cabin pressure altitude exceeds 10 000 ft but does not exceed 13 000 ft after the first 30 minutes at these altitudes

Note 1: The supply provided shall take account of the cabin pressure altitude and descent profile

for the routes concerned.

Note 2: The required minimum supply is that quantity of oxygen necessary for a constant rate of descent from the aeroplane's maximum certificated operating altitude to 3 000 m (10 000 ft) in 10 minutes and followed by 20 minutes at 3 000 m (10 000 ft).

Note 3: The required minimum supply is that quantity of oxygen necessary for a constant rate of descent from the aeroplane's maximum certificated operating altitude to 3 000 m (10 000 ft) in 10 minutes and followed by 110 minutes at 3 000 m (10 000 ft). The oxygen required to meet the crew protective breathing equipment provisions of this Part may be included in determining the supply required.

Note 4: The required minimum supply is that quantity of oxygen necessary for a constant rate of descent from the aeroplane's maximum certificated operating altitude to 15 000 ft.

Note 5: For the purpose of this table, "passengers" means passengers actually carried and includes infants.

- (c) The supplemental oxygen supply requirements for non-pressurised helicopters are as follows:
- (1) An operator shall not operate a non-pressurised helicopter at pressure altitudes above 3 000 m (10 000 ft) unless supplemental oxygen equipment, capable of storing and dispensing the oxygen supplies required, is provided.
 - (2) The amount of supplemental oxygen for sustenance required for a particular operation shall be determined on the basis of flight altitudes and flight duration, consistent with the operating procedures, established for each operation in the OM and with the routes to be flown, and with the emergency procedures specified in the OM.
 - (3) A helicopter intended to be operated above 3 000 m (10 000 ft) pressure altitude shall be provided with equipment capable of storing and dispensing the oxygen supplies required.
- (d) OXYGEN SUPPLY REQUIREMENTS.
- (e) FLIGHT CREW MEMBERS. Each member of the flight crew on flight deck duty shall be supplied with supplemental oxygen in accordance with table 7. If all occupants of flight deck seats are supplied from the flight crew source of oxygen supply, then they shall be considered as flight crew members on flight deck duty for the purpose of oxygen supply.
- (f) CABIN CREW MEMBERS, ADDITIONAL CREW MEMBERS, AND PASSENGERS. Cabin crew members and passengers shall be supplied with oxygen in accordance with table 7. Cabin crew members carried in addition to the minimum number of cabin crew members required, and additional crew members, shall be considered as passengers for the purpose of oxygen supply.

Table 7. Supplemental Oxygen for Non-Pressurised Helicopters

(a)	(b)
Supply for:	Duration and Pressure Altitude
1. All occupants of flight deck seats on flight deck duty	Entire flight time at pressure altitudes above 3 000 m (10 000 ft)
2. All required cabin crew members	Entire flight time at pressure altitudes above 4 000 m (13 000 ft) and for any period exceeding 30 minutes at pressure altitudes above 3 000 m (10 000 ft) but not exceeding 4 000 m (13 000 ft)
3. 100% of passengers (<i>see Note</i>)	Entire flight time at pressure altitudes above 4 000 m (13 000 ft)
4. 10% of passengers (<i>see Note</i>)	Entire flight time after 30 minutes at pressure altitudes greater than 3 000 m (10 000 ft) but not exceeding 4 000 m (13 000 ft)

Note: For the purpose of this table, “passengers” means passengers actually carried and includes infants.

IS 10.1.13 Cosmic Radiation Detection Equipment

- (a) Compliance with the sampling requirements in 10.1.13(a)(2) of this part shall be accomplished as follows:
- (1) The sampling shall be carried out in conjunction with a radiological agency or similar organisation acceptable to the Authority.
 - (2) Sixteen route sectors that include flight above 15 000 m (49 000 ft) shall be sampled every quarter (3 months). Where less than 16 route sectors that include flight above 15 000 m (49 000 ft) are achieved each quarter, then all sectors above 15 000 m (49 000 ft) shall be sampled.
 - (3) The cosmic radiation recorded shall include both the neutron and non-neutron components of the radiation field.
 - (4) The results of the sampling, including a cumulative summary quarter on quarter, shall be reported to the Authority under arrangements acceptable to the Authority.